

NOVEMBER, 1981

\$3.00

# BME


BROADCAST MANAGEMENT ENGINEERING

# I Localism

LOCAL TV, RADIO RISING TO MEET DEMAND

UNIJOB 4840-NM-3811 BVI  
JAKE JACORSEN CF ENG  
UNIV OF WASHINGTON  
DS-40 COMMUNICATIONS  
SEATTLE WA 98105  
-AD



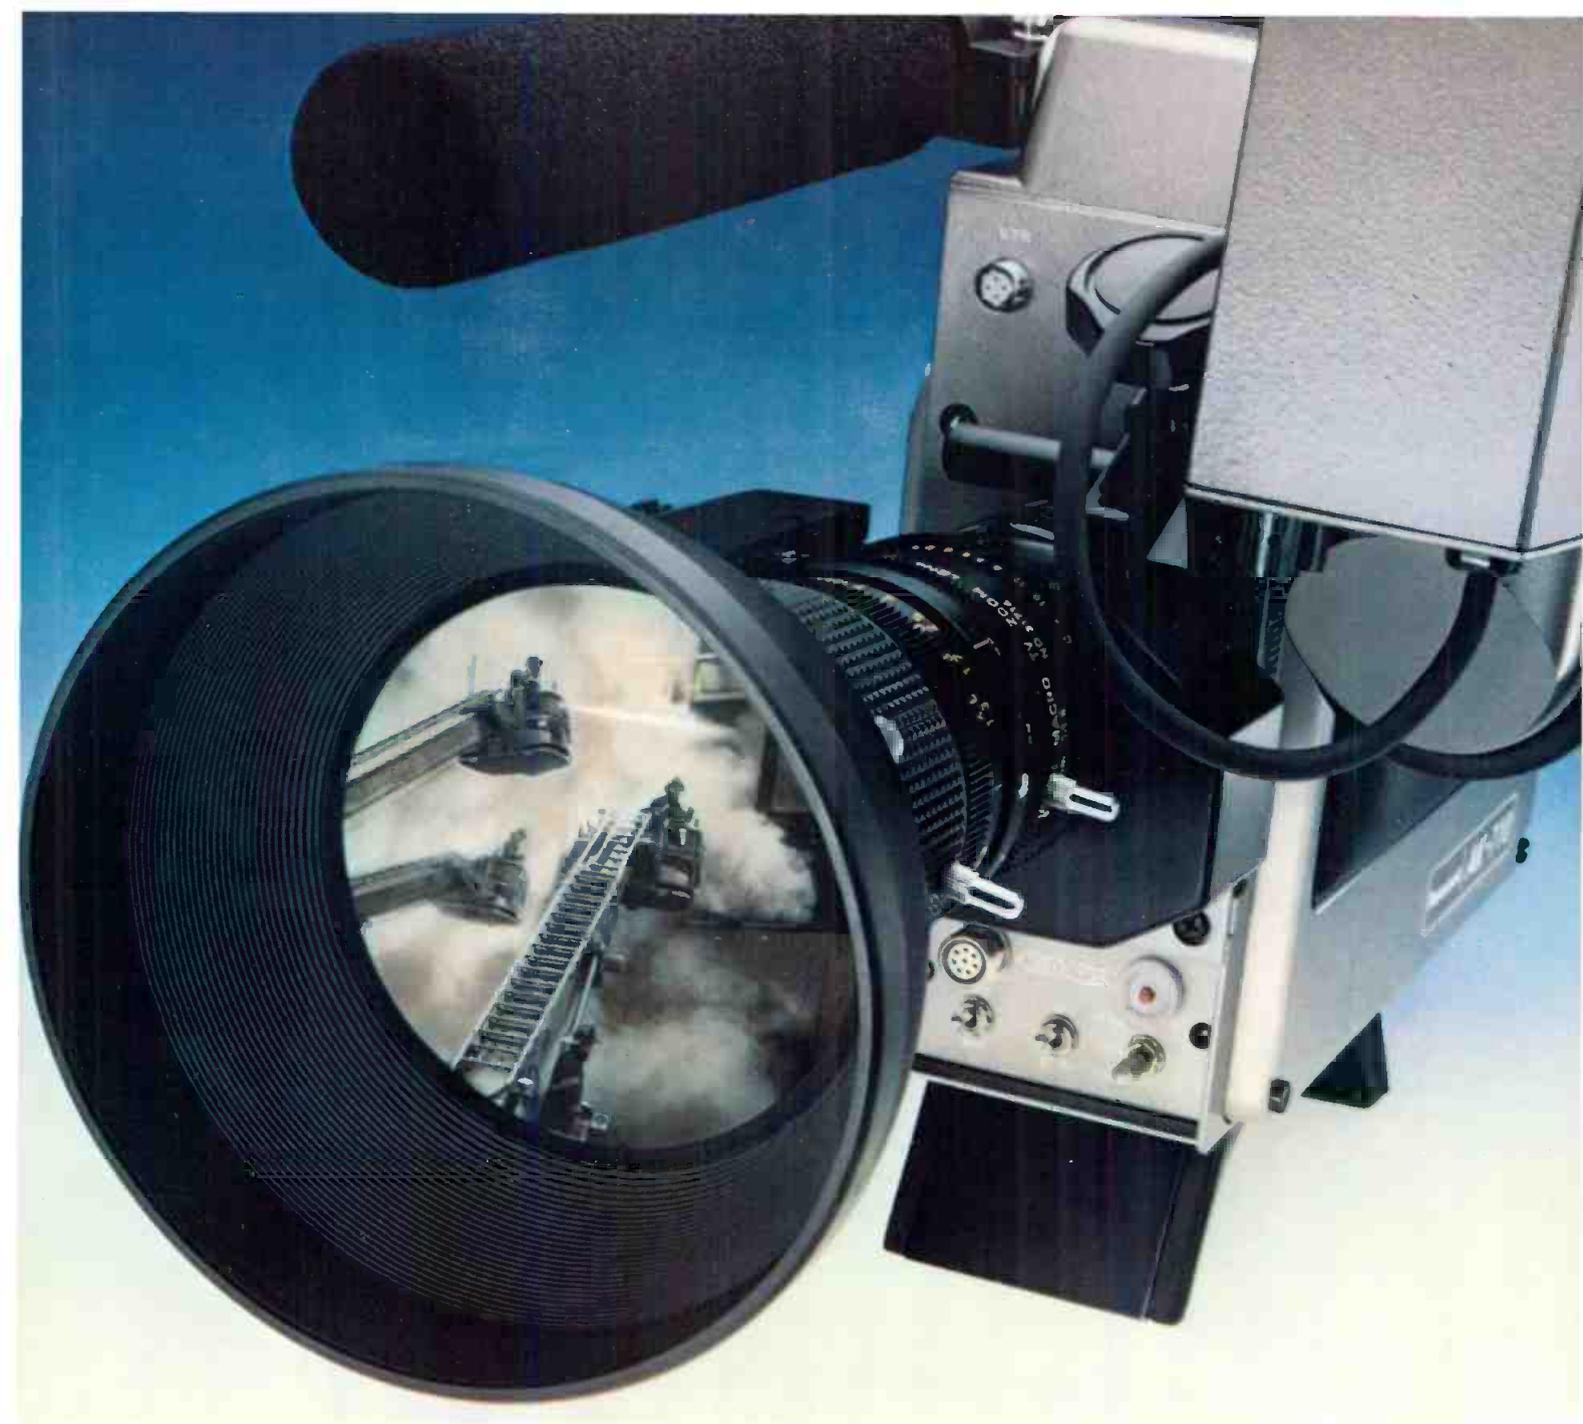

## The big news is performance. The good news is price.

Once again Panasonic makes headlines with our newest ENG camera, the AK-710. And the reasons are simple: High performance Saticon® tubes plus prism optics—all for a news-worthy price of \$10,950\*.

The AK-710's compact size, light weight and durable die-cast chassis make it a natural for electronic newsgathering. While the performance of a high-index optical system with built-in bias light and three Saticon tubes makes

it a natural for news broadcasting: Performance like horizontal resolution of 500 lines center, a S/N ratio of 52 dB and standard illumination of 200 footcandles at f/3.5. And for even more light-gathering capabilities, there's a 2-position high-gain switch.

You'll also get colors as intense as the action, thanks to the AK-710's automatic white balance circuit and built-in color temperature conversion filter wheel. And for minimal comet tailing,

the AK-710's feedback beam control stabilizes highlights that exceed normal white levels without reducing dynamic range or resolution.

Equally newsworthy is the AK-710's built-in genlock and adjustable horizontal and vertical blanking intervals. With them the AK-710 can double as a system camera. There's also an optional remote control unit, as well as a 5" CRT viewfinder for studio use.

So if news is what you're

after, go after it with the AK-710. A newsmaking camera from Panasonic.

For more information about the line of Panasonic broadcast equipment, call your nearest Panasonic office.

Northeast —(201)348-7620  
Southeast —(404)923-9700  
Midwest —(312)364-7936  
Southwest —(214)258-6400  
West Coast —(213)655-1111

\*Manufacturer's sugg. price. (Lens not included.)  
Saticon is a registered trademark of NHK  
(Japan Broadcasting Corp.).

**Panasonic**  
VIDEO SYSTEMS DIVISION

Circle 100 on Reader Service Card

# CMX computer-assisted time code editing for \$13,250?



## You bet.

THE EDGE™ from CMX. Now a proven standout when it comes to features and performance in videotape editing.

But wait. Look at that price.

You can get a complete EDGE time code-based editing system including control and display console, electronics frame, cuts-only switcher, two-event GPI, plus interface for two VTR's, for \$13,250. (U.S.)

A three-machine system, including Edit Decision List I/O module, floppy disk drive and A/V dissolver sells for \$23,450. (U.S.)

And, in addition to the dollar EDGE remember that our SMART KEYS™ and layered screens let you set your own editing pace. Our plug-in modules allow you to make the change from two to three machines as well as incorporating product updates quickly and easily. Also we output a 340X Edit Decision List. And remember, we've been talking to VTRs for a long time at CMX. Our smooth-as-silk interface results in extremely reliable operation.

We mean it when we say price, performance and features give you the reasons why THE EDGE is the only system you should own.

See your CMX representative for more details or give us a call.

**THE EDGE**  
Winner 1981  
Industrial Design  
Excellence Award  
Industrial Designers  
Society of America

THE EDGE™

CMX

3303 Scott Blvd., Santa Clara, CA 95050. (408) 988-2000

TM Orrox Corp.

**CMX**  
**ORROX**

Circle 101 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)



## The VPR-2B Edge. Smooth as Silk Slow Motion.

The VPR-2B. Its intelligent design and creative editing give you the edge. But we didn't stop there.

The Ampex edge really comes through with our smooth as silk slow motion! The VPR-2B's special effects—forward and reverse slow motion as well as still pictures—are as smooth and free of distortion as anything you'll find in videotape production.

This flawless performance comes from our AST™ tracking system option. After all, we invented the AST using a flexible bi-morph strip to optimize head-to-tape contact over the entire deflection range.

**Include Our Slow Motion Controller and Cue Locator for the Ultimate in Special Effects. All From Ampex.**

Two accessories from Ampex can really make a difference in your total production capabilities. And each are top performers in the Ampex tradition.


Take our STC-100 Multipoint Search To Cue. Its memory can store up to 99 auto cue points or 99 still recordings for quick recall. In addition, the STC-100 can store its memory on tape for recall by another STC-100 in another location.

Now add our SMC-100 Slow Motion Controller and you've got remote speed control for operations like normal speed playback, variable slow motion in forward and reverse, freeze frame, variable speed shuttling, and automatic cue point.

The Ampex Edge. It's experience. It's design excellence. It's performance when and where you need it.

And there's only one place to get it. Call your Ampex representative today.

**Get the Ampex Edge.**

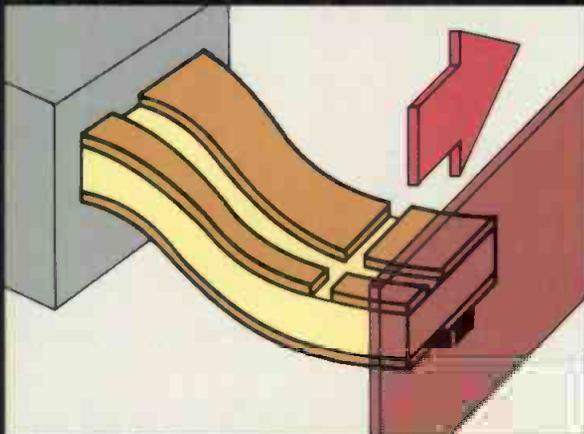

RE-CURVED BI-MORPH



SMC-100 SLOW MOTION CONTROLLER



STC-100 MULTIPOINT SEARCH TO CUE



Ampex Corporation, Audio-Video Systems Division  
401 Broadway, Redwood City, CA 94063  
415/367-2011

Circle 102 on Reader Service Card

# BM/E

BROADCAST MANAGEMENT/ENGINEERING



Localism is on the rise as stations devote resources in people and equipment to gain audience. Illustration by Hector Ayala.

## NOVEMBER 1981/VOLUME 17/NUMBER 11

- 10 Broadcast Industry News**  
*AT&T satellite plan okayed — with changes; RCA to begin digital audio service; FCC asks end of fairness, equal time rules*
- 27 Radio Programming & Production For Profit**  
*RKO: riding high on the satellite wave*
- 28 BM/E's Program Marketplace**  
*Al Ham's "The Music of Your Life" revisited*
- 31 Television Programming & Production For Profit**  
*WISH fulfillment for an expanded late news*

- 36 Localism: A New Strategy And A New Technology To Support It**  
*Twin forces power broadcasting's increasing growth*
- 39 WWAC: Monopoly On Localism**  
*New Jersey's newest TV station is filling the local news gap*
- 53 Local Broadcasting: Looking To The Future**  
*WCVB's Bob Bennett gives his view of where TV is going*
- 63 Starting A News Department From Scratch**  
*KICU-TV aimed for quality — and got it*
- 71 The Biggest Satellite Net Becomes A Supporter of Radio Localism**  
*Mutual Broadcasting's operation supports affiliates' vigorous localism*
- 81 A Complete System Check Confirms The Top Quality Of Satellite Audio**  
*Tests by Bonneville back up the claims*
- 91 Local Radio Scores in U.K.**  
*Both BBC and indy stations do well with listeners*

Publisher  
**Charles C. Lenz, Jr.**  
Editorial Director  
**Gerald M. Walker**  
Editor Emeritus  
**James A. Lippke**

Managing Editor  
**Janet E. Smith**  
Senior Editor  
**Robin Lanier**  
Senior Editor  
**Stephen C. Miller**  
Associate Editor  
**Eva J. Blinder**  
Special Assignments Editor  
**C. Robert Paulson**  
Editorial Assistant  
**Douglas Damoth**

Associate Publisher  
**Djuna Van Vort**  
Creative Director  
**Gus Sauter**  
Production Manager  
**David Rose**  
Reader Service  
**Robert Crawford**

Comptroller  
**Michael J. Lanni**

FCC Counsel  
**Lovett, Ford, Hennessey,  
Stambler & Siebert, P.C.**

- 99 How Radio Operators Get A Real Lift From Reverb**  
*A look at the basics suggests a host of uses*
- 105 Satellites And Computers Star At RTNDA**  
*The convention embraced technology like a long-lost relative*
- 113 NRBA: Network Star Wars**  
*"Satellite" was the word*
- 119 Great Idea Contest**  
*Win a calculator — enter the Great Idea Contest!*
- 127 FCC Rules & Regulations**  
*Section 315: the equal opportunity doctrine*
- 135 Broadcast Equipment**  
*BM/E's survey of new products*

### In the December Issue

Nominees for the *BM/E* Best Station Awards will have center stage. Readers can vote for the best candidates in four categories — TV, FM, AM/FM, and AM — using a special ballot.

### BROADBAND INFORMATION SERVICES, INC.

295 Madison Ave., New York, N.Y. 10017, 212-685-5320, Telex: 644-001  
Publishers: **BM/E—Broadcast Management Engineering**  
**BM/E's World Broadcast News**




**VBPA** **ABP** **MCC**  
BM/E BROADCAST MANAGEMENT ENGINEERING (ISSN 0005-3201) is published monthly by Broadband Information Services Inc. All notices pertaining to undeliverable mail or subscriptions should be addressed to 295 Madison Ave., New York, NY 10017. BM/E is circulated without charge to those responsible for station operation and for specifying and authorizing the purchase of equipment used in broadcast facilities in the U.S. and Canada. These facilities include AM, FM and TV broadcast stations, CATV systems, ETV stations, networks and studios, audio and video recording studios consultants, etc. Subscription prices to others \$24.00 one year, \$36.00 two years. Foreign \$30.00 one year, \$48.00 two years. Air Mail rates on request. Copyright 1981 by Broadband Information Services, Inc., New York City. Second class postage paid N.Y., N.Y. and additional mailing offices.

# YOU'RE IN GOOD COMPANY

Routing switchers from the Grass Valley Group have been the choice of discriminating broadcasters for more than ten years. And little wonder; GVG has earned a reputation for providing the best products and the best service in the industry.

The 100x60 system pictured is an excellent example. Installed in a major network switching center in 1970, it has since undergone numerous expansions. Today, at 200x200, it is still in operation...over 90,000 hours of virtually continuous service and still going strong.

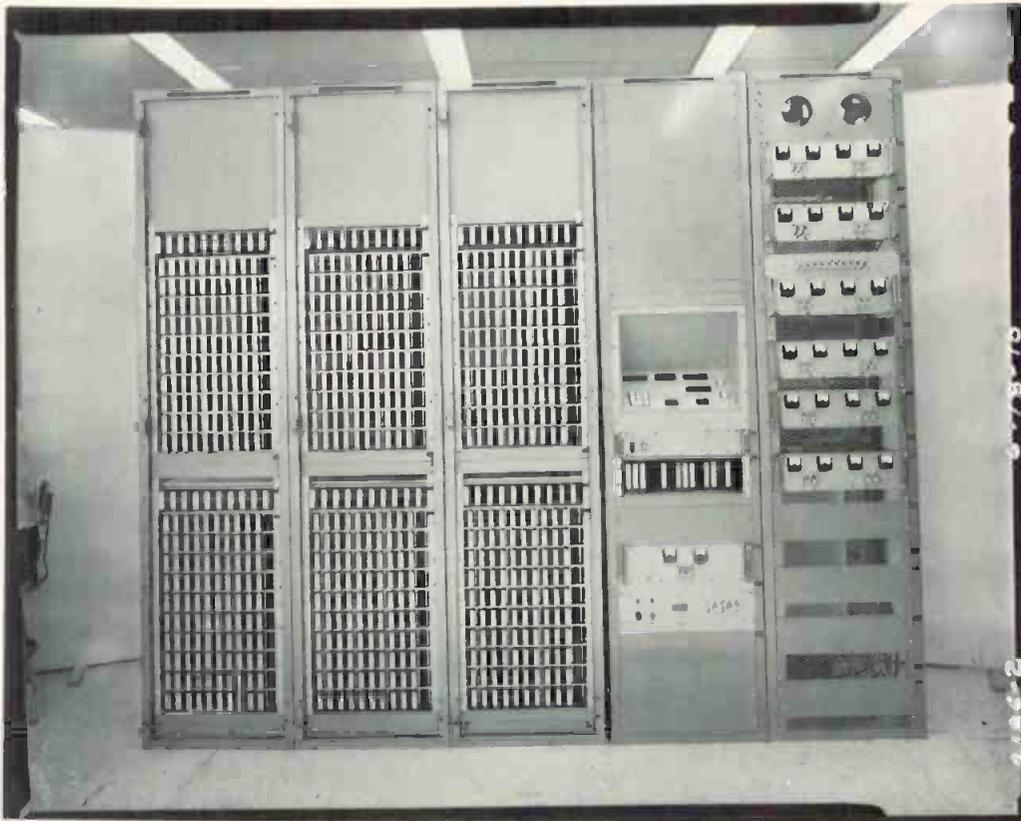

The operations manager of a 24-hour-a-day satellite network chose Grass Valley Group routing switchers for their "durability and reliability". There's no time for downtime in such an around-the-clock operation.

For most stations a routing switcher is a long term investment, and the heart of the technical plant. It just doesn't make sense to cut corners on such an important purchase. That's why our routing switchers have been selected for use in 100% of the Top Ten markets, and in 90% of the Top Twenty-Five markets.

If there is a routing switcher in your future, be in good company with those who have chosen Grass Valley Group, the World Leader in Television Switching.

## THE GRASS VALLEY GROUP, INC.

P.O. BOX 1114 GRASS VALLEY CALIFORNIA 95945 USA • TEL: (916) 273-8421 TWX: 910-530-8280

A TEKTRONIX COMPANY

Offices: WEST: 21243 Ventura Blvd Ste 206, Woodland Hills, CA 91364, (213) 999-2303 • SOUTHEAST: 1644 Tullie Cir NE, Atlanta, GA 30329, (404) 321-4318 • NORTH CENTRAL: 810 W Bristol St, Elkhart, IN 46514, (219) 264-0931 • NEW ENGLAND & MID ATLANTIC: 499 Thornall St, Edison, NJ 08817, (201) 549-9600 • SOUTH-WEST: Seminary South Office Building Ste 316, Fort Worth, TX 76115, (817) 921-9411 • MIDWEST: 3585 N Lexington Ave Ste 238, Arden Hills, MN 55112, (612) 483-2594

Circle 103 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

WSAZ.KABC.WRQC.WKYC.KSTU.WTOV.WJKW.KMTV.WFSB.KDKA.WPVI  
WPFT.KOTA.WFRV.ABC.KGUN.WPTY.KCRA.WWLP.KOTY.WFAA  
WKBW.WCNY.KGW.WPTZ.KRON.WRC.KOKH.WBOC.WLS.KPRC

KOMO.WTNH.KMBC.CNN.WGGB.KING  
KTVY.WABC.ESPN.KOLN.WTBS.KOTV

WTYQ.WISH.WLPB.KYTY.WJKS.KCST.WPDW.WYD.Q.WBAY.KRIV.WHEC  
WTEN.WAST.KBNB.WSPA.KPIX.WITI.WSB.KWTA.WLKY.KATV.WGN  
WTVR.D.KMSP.KFSN.WOVT.PBS.WXYZ.KLAA.WBZ.KHDN.WPRI

**HAWKEYE IS A CAMERA**

**HAWKEYE IS A RECORDING CAMERA**

**HAWKEYE IS A RECORDER**

**HAWKEYE IS AN EDITING SYSTEM**

**A system you can build at your own pace.**

See your RCA Representative today for all the HAWKEYE facts. Deliveries are sooner than you think. RCA Broadcast, Bldg. 2-2, Camden, N.J. 08102


# USE IT...

as a live camera. With HAWKEYE field and studio recorders. Or any format VTR, including your own. The HC-1 is a tough lightweight...easy to handle...built to take abuse. With its new 1/2-inch pick-up tubes and advanced design prism optics, you can depend on the HC-1 to deliver consistently superior broadcast quality pictures under a wide range of operating conditions.



# USE IT...

for the ultimate in operations economy and mobility...reliability and picture quality. RCA's HCR-1 is the field system you asked for. And the one you specified. A single-person, single-piece production unit that, with its new ChromaTrack recording format, closes the performance gap between small, portable recorders and broadcast cameras by delivering far superior VTR picture quality. The kind of quality that is required for demanding production assignments as well as highly professional news and sports coverage. And, because the HCR-1 and its companion HR-2 studio VTR have a standard NTSC color output, you can use them with your present broadcast equipment for excellent results.

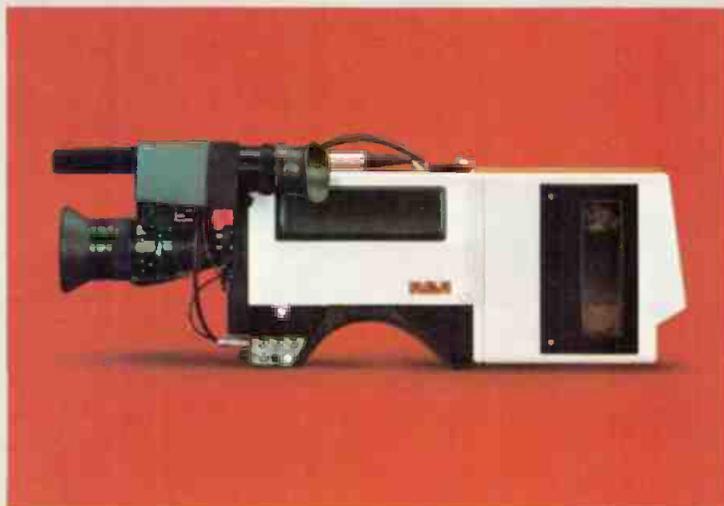

# USE IT...

in the field with any camera. When you choose the HR-1, you're getting a VTR that outclasses portable 3/4-inch recorders. It's smaller...lighter...built to last. The HR-1 delivers exceedingly better picture quality, too, with RCA's new ChromaTrack recording format. That means your edited tape will be of higher quality. Whatever format you use: ChromaTrack, 3/4-inch, one-inch or quad. You can edit in your own format by adding the fully compatible HR-2 studio VTR to your system.



# USE IT...

done for simple cut editing or integrate it into your sophisticated effects or multi-format system. The HE-1 edit controller and HR-2 studio video tape recorders provide complete editing capabilities. Including 8X play speed forward and reverse searching, and full preview/review, assemble/insert editing. Providing a standard NTSC color output, HR-2 ChromaTrack format recorders may be added to your post-production system with full operating advantage.



# BROADCAST INDUSTRY NEWS

## AT&T Satellite Plan Okayed — With Changes

The tariff for AT&T's new Satellite Television Service (STC) went into effect September 25, after changes were made to satisfy the FCC's rule that the original plan was illegal.

Under the initial proposal, occasional users were required to lease earth stations from AT&T in a "bundled" rate structure (full-time users could provide their own dishes or lease AT&T's).

The Commission objected to this provision, noting that the bundled rate plan allowed transponder access only to users willing to pay for an AT&T earth station.

AT&T responded to this objection by deleting occasional use from the tariff, offering the service only to full-time users. AT&T's Maureen Dvorak told *BM/E* that NBC had signed on as the first STC customer, with service scheduled to start in October. The NBC programming is slated to originate in

NBC studios in New York and Burbank, with dedicated earth stations located in Chicago, Houston, New York, and Burbank.

ABC, CBS, Wold Communications, and the National Entertainment Network are also scheduled to use SCN. The service will distribute television programming over AT&T's Comstar domestic satellite system.

## ... While RCA To Begin Digital Audio Service

RCA Americom has announced that it will begin a new digital audio system that will distribute radio programming by satellite. Three companies have signed up for the new service — CBS, NBC, and Wold Communications.

Harold Rice, vice president of video services for RCA Americom, made the announcement at a news conference during the recent NRBA conference (see p. 113). The new service, called Audio Digital Distribution Service (ADDS), will make available 20 15

kHz channels on Satcom 1. The service will begin in 1983 with the launching of Satcom 3, which will free up the transponders on Satcom 1 currently carrying cable channels.

Thomas Dawson, vice president, division services of CBS Radio, said that the new system will allow the present network as well as the new RadioRadio net, to be distributed completely by satellite.

Reception of ADDS will be on a 10-foot dish the user must furnish, though RCA has an arrangement with Scientific-Atlanta for production of a dish compatible with the ADDS system. S-A will definitely be supplying the dishes for NBC's digital network; an agreement reached in September calls for the manufacturer to provide earth stations for most of NBC's 600 affiliates.

## FCC Asks End Of Fairness, Equal Time Rules

The Reagan FCC continued to solidify

## New Editor Reports To BM/E



On the job at the recent SMPTE Conference in Los Angeles, new *BM/E* Chief Editor Robert Rivlin (left) interviews Fred Remley, vice president of TV affairs for SMPTE. A story on the conference and show will appear in the December issue.

*Broadcast Management/Engineering* has named Robert Rivlin as its new Chief Editor effective with the December issue.

Rivlin served as *BM/E*'s Senior Editor from 1978 to 1980 and during that time received an ABP Neal Award Citation for his work on a Best Staff written series of articles. Most recently he was Technical Editor for *Millimeter* magazine and an international correspondent on technology to *TV World*.

Rivlin comes from a background in film and television production and he has won several awards for his documentary film and sports work. His articles on film and television appear in *Omni* magazine.

## NEC Boosts ENG, Cable With Two NTSC Signals On One Channel

American broadcasters may soon get a crack at a new technological development their Japanese counterparts have been trying out since January: a dual video transmission system that puts two full RS-170A NTSC video signals on a single, conventional video channel.

The system, NEC's new DV-10, was developed in response to requests from Japanese news crews, whose ENG microwave channels are extremely limited. The signals are compressed horizontally and simultaneously transmitted over ENG microwave, long lines, or a satellite transponder; when separated, each has quality 10 to 20 percent better than U-Matic, according to NEC vice president R. Dennis Fraser.

Fraser told an October press conference that Japanese viewers were unable to distinguish between signals transmitted via the DV-10 and those transmitted in the standard manner. Because the signals are synchronous (the system includes time base correction for both signals at the input), production can take place at the station. In addition, the system switches to regular, full-channel transmission at the push of a button. Audio must be handled discretely (i.e., on the audio channels of ENG equipment or satellite transponders). The dual signal can be viewed and monitored in transmission.



Two full NTSC video signals with U-Matic quality ride side-by-side on NEC's new DV-10

Television news directors will probably see immediate applications for the DV-10, which is also being used as an STL in Japan. Its other major applications — for cable program distribution and video teleconferencing — may spark controversy between users and common carriers over tariff rates. The battle is already raging in Japan, Fraser said, where Nippon Telephone & Telegraph wants to double the tariff for the dual transmissions. Tariff battles in the U.S. "will be fantastic," Fraser predicted. No price has been set yet, but the modular system, consisting of a multiplexer and demultiplexer, will probably run in the neighborhood of \$50,000.

# Quality, Reliability, Service...

## Excellent Reasons for Choosing ADM®



ADM 2400 Series II Console

ADM understands how critical it is for professionals to be assured of unfaltering performance under the most demanding conditions. That's why everything we do at ADM—from initial concept to final production—is geared to providing consoles of unexcelled quality and reliability.

The finest of components are used in ADM consoles to assure long life and trouble-free operation. Our exclusive five-year warranty, the most generous in the industry, attests to this fact. Service—if you ever need it—is prompt and professional. Contact ADM Technology, Inc.

**Home Office:** 16005 Sturgeon  
Roseville, Michigan 48066  
(313) 778-8400, TLX 23-1114

**West Coast Sales:** (415) 664-2400

**Rocky Mountain Sales:** (801) 486-8822

**West Central Sales:** (817) 467-2990

**East Coast Sales:** (313) 778-8400

**ADM**®  
*The Audio Company*

## News

its stance on the side of broadcasters in September with its recommendations that Congress broadly revise the Communications Act, including repeal of the fairness doctrine and equal time provisions.

Specifically, the recommendations suggest deletion of Section 315 (requiring equal access to the air for legally qualified candidates for public office) and extensive rewording of Section 326, which would be amended to read, in part, "no . . . obligation to afford

opportunity for the discussion of conflicting views on any issue shall be promulgated or fixed by the Commission . . ."

Newly appointed commissioner Henry M. Rivera abstained from the proceeding, stating that his knowledge and understanding of the issues were not yet broad enough to allow him to participate knowledgeably. Commissioners Washburn and Fogarty dissented from the revisions of Sections 315 and 326, both claiming that the provisions have not outlived their usefulness.

Chairman Fowler disagreed, both in

his vote and in a strong separate statement that affirmed, "The so-called fairness doctrine permits this Commission to act as editor and censor of material broadcast to the people . . . I would rather have the editor make these choices than the government." He termed the proposed revisions an action "in the name of free speech."

Other major proposed revisions included the establishment of "a presumption that marketplace forces will normally be favored over regulation" in determining telecommunications policy and extensive changes in the license and renewal sections. License provisions would call for a "demand system" of allocations "since fair and equitable distribution of radio and television service generally has been established nationwide."

The Commission also recommended that during renewal proceedings, a licensee's performance be compared "only against standards set forth in the amendment, not against any competing applicant." Only if the licensee fails to meet standards would the frequency be open to other applications.

In addition, those parts of Section 312 that call for license or CP revocation for violation of the rules on lotteries, fraud, or obscenities or for failure to allow "reasonable access" to candidates wishing to purchase air time would be deleted.

### Broadcasters Cheer Fowler's "Market" Stance

FCC chairman Mark Fowler's speech at the recent IRTS Newsmaker Luncheon drew a standing ovation from assembled broadcasters, who cheered his affirmation that marketplace forces, not government "trusteeship," must determine the course of U.S. broadcasting.

Marilyn Dimling of the NAB echoed the thoughts of many in the industry when she told *BM/E*, "We've been working for a long time for this — for the repeal of the Fairness Doctrine and Section 315. Obviously, we're very happy to hear the chairman articulate it."

Possibly less happy are various public interest groups, suddenly faced with a Commission less likely to turn their demands into regulation. Panic however, is premature, according to Pluria Marshall of the National Black Media Coalition. "Deregulation shifts where the leverage has to come from, in terms of community groups dealing with broadcasters" Marshall commented. "The era of deregulation is upon us," he said, "but many who are upset about it are those who are not willing to work hard to develop alternate strategies. We are not one of those groups." He noted that the Commission was continuing to enforce its EEO policies and support

## "Specials are our Specialty."



### Another Reason Why MATRIX is the Leader in Coax Switching Systems.

MATRIX will build and test your complete switching system from standard components. And save you time and money in the process.

There's no need to spend weeks designing a custom system when all you need is a combination of standard MATRIX switching modules. MATRIX accepts total systems responsibility, including computer compatibility, control panel, status indicators, scanning functions, and power supplies — everything, right through final signal routing.

Remember, too, MATRIX can switch any type of cable system — coax, twinax, triax, common ground, floating ground, etc. MATRIX modules do the job reliably and efficiently, using dependable, hermetically sealed reed relays with switching speeds of one millisecond!

So simplify your next custom switching requirement. Just tell us what goes in and what goes out. We'll take it from there. You'll soon see why specials have become our specialty.

Phone or write for details.



**MATRIX**  
SYSTEMS CORPORATION

5177 NORTH DOUGLAS FIR ROAD • CALABASAS, CALIFORNIA 91302  
(213) 992-6776 • TWX 910-494-4975

Circle 104 on Reader Service Card



# BRILLIANT

## The New Anton/Bauer LG-30 Lighting Head

Anton/Bauer, the recognized leader in portable battery systems, has done it again with their new LG-30 "Black Beauty" Lighting Head, the ultimate in portable lighting.

This unique unit offers professional features not found in any other light — a spring loaded, captive, swing-away dichroic filter; integral one hand on-off and focusing; extra heavy duty



The perfect companion for the LB-30D Battery Belt.



The LG-30 mounts easily to any ENG camera.

cable and strain relief; a standard handle with spare bulb storage (removable for camera mounting); brackets for custom mounting on all ENG cameras; and an improved lamp socket that accepts standard 12v and 30v bulbs. The LG-30 "Black Beauty", the first truly heavy duty professional portable light.

**anton  
bauer**

For further information call or write:  
**ANTON/BAUER, INC.**

66 Center Street, Shelton, CT. 06484

(203) 735-3305

## News

minority ownership.

In his speech, Fowler asserted that broadcasters, not the government, are the best judges of how best to serve their listeners. He termed the "scarcity" rationale for regulation "a radical and constitutionally questionable way of thinking," noting that scarcity exists in all industries.

Fowler's strongest words were reserved for what he saw as erosions of broadcasters' First Amendment rights under the "trusteeship" system. He

said, "Each time we at the Commission insinuate our judgment into the editorial decisions of broadcasters . . . each time review a renewal application for this percentage of news or that percentage of public affairs . . . we trample on the freedom that broadcasting is guaranteed by the First Amendment." Full First Amendment rights "are your birthright as members of the press," he stated.

Current ownership and transfer rules also came under the chairman's attack as he questioned the "rule of seven" and "our marriage ceremony approach to broadcast transfers."

Finally, Fowler stressed his view of the marketplace as the best gauge of public needs. "The battlefield for the people's interest will be on transponders over Omaha and coaxial lines under Brooklyn, on UHF channels in Fresno and FM frequencies in Seattle," he asserted. "Do not look for it on a regulator's mahogany desk or in his metal filing cabinet."

## Kidvid Ad Rulemaking Abandoned By FTC

The three-year old rulemaking procedure scrutinizing advertising on children's television has been scuttled by the Federal Trade Commission, which said the inquiry could no longer take the place of its "other important enforcement priorities."

The rulemaking, which began in 1978, received a severe blow last year when Congress told the FTC that "unfairness" was insufficient grounds to regulate advertising. Only actual deception could justify such rules, Congress told the agency. FTC staff had found in 1978 that the "possibility of unfairness or deception in children's advertising was sufficiently great" to justify the inquiry.

Action for Children's Television, the public interest group that initiated the rulemaking, indicated its strong disagreement with the FTC action dropping the rulemaking. A spokesperson for Kellogg's, one of the major advertisers under scrutiny in the inquiry, expressed the opposite point of view: "The FTC has finally got its head turned around," he said.

## Compact Video HDTV Unveiled At SMPTE

Attendees of last month's SMPTE meeting in Los Angeles were treated to the first demonstration of Compact Video's new process for high-definition television, described as the world's first commercially available HDTV system.


According to Compact Video president and board chairman Robert E. Seidenglanz, the system, known as ImageVision™, produces a picture with about 2½ times the apparent resolution of the NTSC signal.

Seidenglanz revealed that Compact had already come to agreement in principle with a manufacturer of cameras and VTRs, although at press time he would not name the company. He said, however, that an HDTV camera and switchable monitor would be available for purchase by the end of the year. The ImageVision signal, Seidenglanz said, can go on one channel of any current domestic communications satellite.

Since the apparent resolution of ImageVision is equal to that of 35 mm

**THEY SURVIVE THE TORTURES OF THE RACK.** No other modular signal processing system is as rugged as the dbx 900 Series.\* With features like captive screw-in fasteners for positive retention. Wide, double-sided contacts on interchangeable modules. A pre-wired mother board that eliminates the need for soldering. A heavy-duty power supply. All in a 5¼" frame built tough as a truck. Best of all, every 900 Series module delivers the kind of performance and reliability you expect from dbx. See your dbx Pro dealer or write for information.

\*With F-900 frame. Also compatible with most older-model dbx frames.

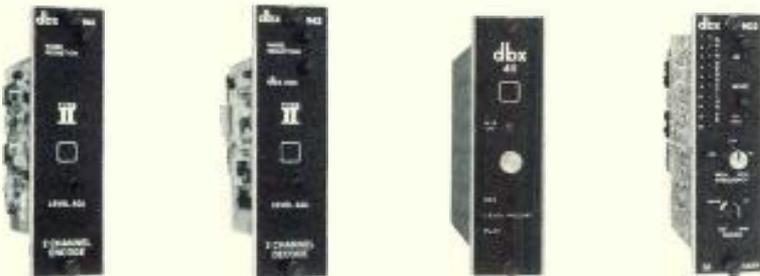


Model 941 \$260.\*\*  
Type II Noise  
Reduction (encode)

Model 942 \$270.\*\*  
Type II Noise  
Reduction (decode)

Model 411 \$310.\*\*  
Type I Noise  
Reduction

Model 902 \$325.\*\*  
De-esser

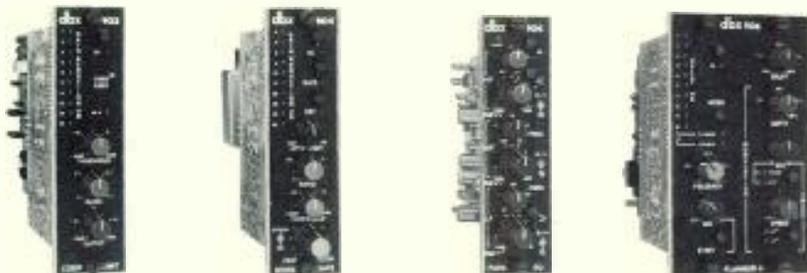

Model 903 \$325.\*\*  
Compressor/Limiter

Model 904 \$325.\*\*  
Noise Gate

Model 905 \$340.\*\*  
Parametric EQ

Model 906 \$720.\*\*  
Flanger

\*\*Manufacturer's suggested retail price.


dbx, Incorporated, Professional Products Division,  
71 Chapel St., Newton, Mass. 02195 U.S.A.  
Tel. (617) 964-3210, Telex: 92-2522. Distributed in  
Canada by BSR (Canada) Ltd., Rexdale, Ontario.

**dbx**®

Circle 106 on Reader Service Card

# UNDERPAID OVERACHIEVER

The MICROTIME T-120 Time Base Corrector.

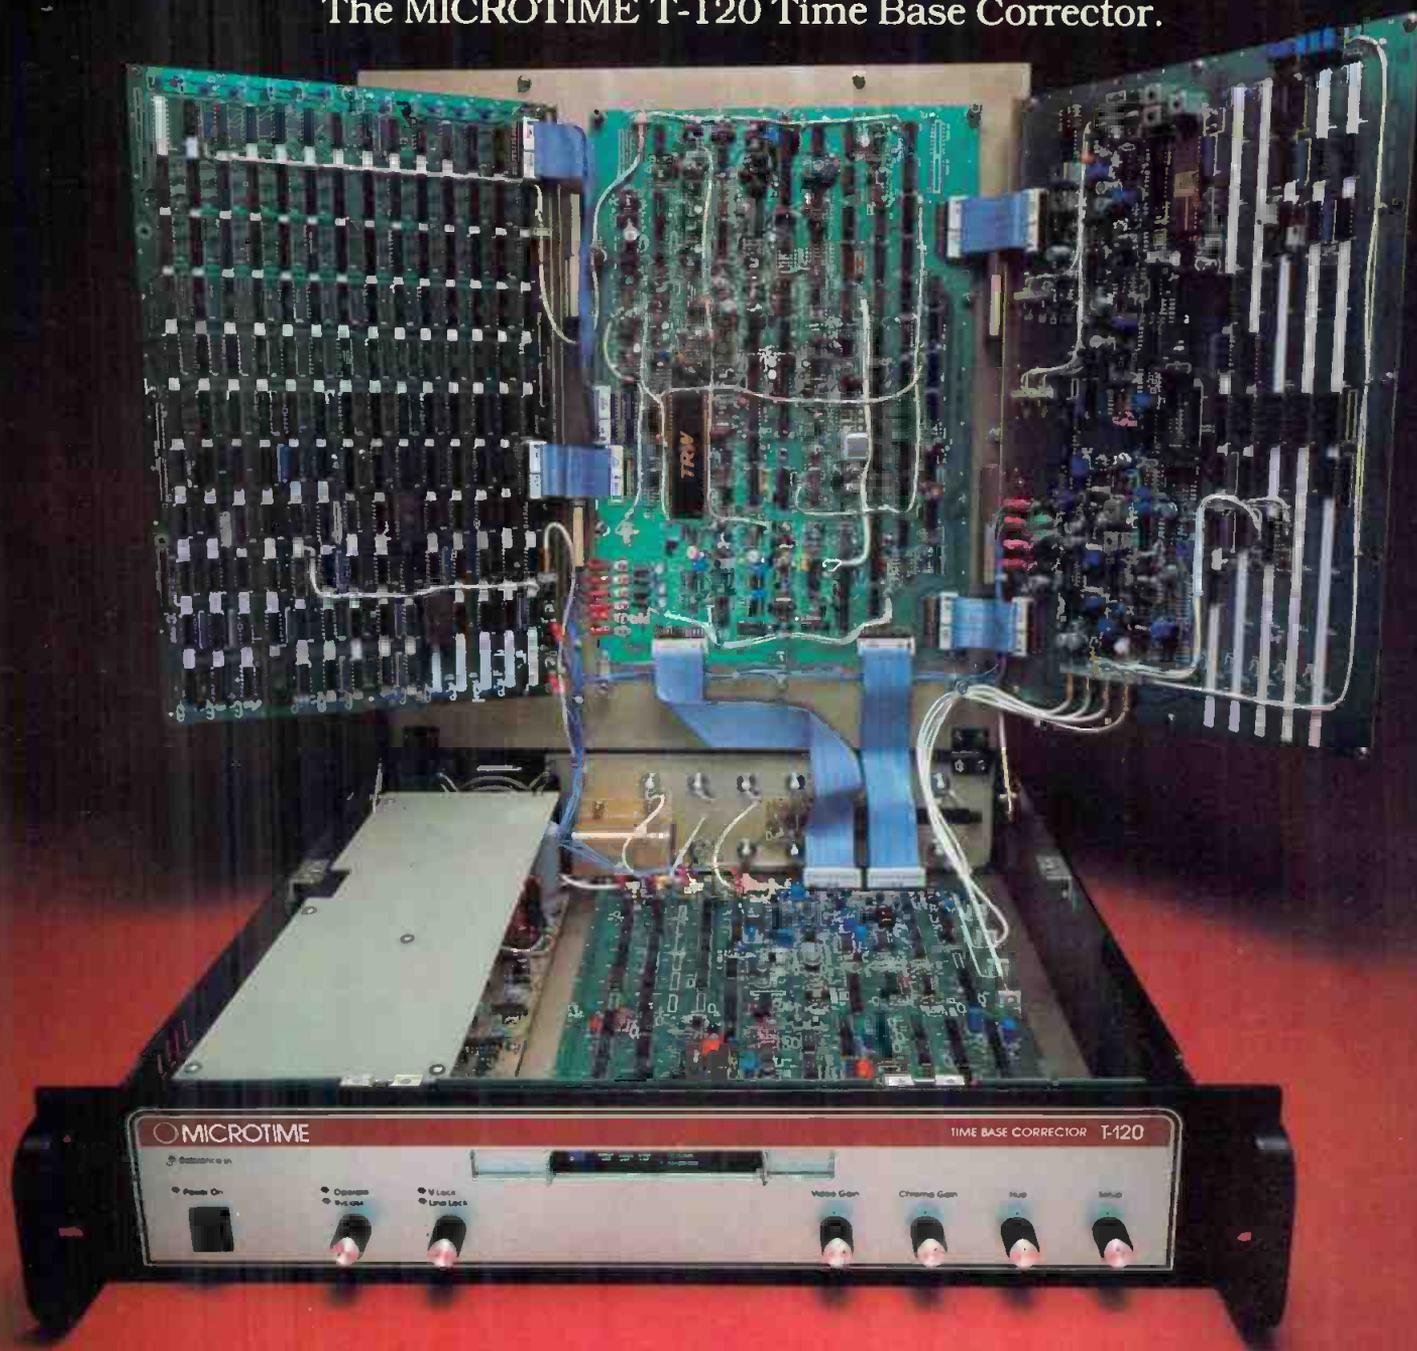

It does everything but cost a lot:

- 8 bit, 4x subcarrier digital design for high reliability and transparent performance
- Wide range, 16-H line memory allows correction of large gyro errors
- 3.58 MHz feedback for full bandwidth processing
- Averaging Velocity Correction for best color performance

- Chroma/Luminance delay compensation adjustment for smear-free pictures
  - Built-in RS-170A Sync Generator will operate genlock or standalone if reference is lost.
- For full information contact: MICROTIME,  
1280 Blue Hills Avenue Bloomfield, CT 06002.  
(203)242-4242 TWX 710-425-1165

 MICROTIME

Circle 107 on Reader Service Card  
[www.americanradiohistory.com](http://www.americanradiohistory.com)

## News

film, Seidenglanz said, the system could become useful for shooting movies electronically and distributing them via satellite to theaters with electronic projection systems. Savings over usual distribution methods would be enormous, he stated. Video editing of shows or movies shot on film would also be possible with the system. Other applications could include high-definition premiere cable channels or HDTV service to the home, with FCC approval.

## 3M Development Simplifies Animation

Video animation without cumbersome preroll procedures and external editors has arrived, according to 3M.

The company told an October press conference that the simplified video animation procedure was a new application of the Automatic Track Following system incorporated in its TT-7000 VTR. Dave Bixler, marketing manager for recording products, said that the new system, by eliminating preroll, saves time and tape deterioration.

The new animation process permits

animation to be recorded one field at a time without preroll. Each field is recorded while the tape is stationary, with immediate playback. A tachometer monitors and controls tape position, insuring tracking accuracy. As many as eight pictures may be recorded per second; the user can also edit one field at a time in stop motion.

## Emmys Honor Ampex, RCA, Ikegami, Marconi

Once again, the technical achievements of broadcast industry manufacturers have been recognized by the National Academy of Television Arts and Sciences at its annual award ceremony in New York. RCA carried off its seventh Emmy, this one for its role in "the development of digital computer techniques for the automatic alignment of color television studio cameras" — specifically, the TK-77 automatic studio camera.

Also cited for their work in the automatic camera field were Ikegami and Marconi. Ikegami's Emmy honored the company for its automated HK-312 and other achievements in the area of color camera automation; Marconi got a certificate of achievement for its pioneering work in the development of the Mark XIII automatic color television camera.

Ampex and CBS shared an Emmy for their development of ESS, the first digital video production system, which, in the words of the award, "made the magnetic storage and electronic broadcasting of film slides and graphics easier to manage and more reliable with consistent high quality." The original ESS debuted in 1976.


The academy also honored Rank Cintel with an Emmy for the development of the Mark III flying spot telecine, first introduced in 1976.

## New Satellite Antenna Pulls In 14 Satellites

Satellite Communications Network, a New York-based common carrier, has come up with an idea that may prove a major boon to the cable industry. The company recently introduced Simulsat, a satellite antenna capable of simultaneously receiving signals from any satellite in a 52-degree field of view — up to 14 satellites at once.

Although aimed primarily at cable operators, the satellite will also interest broadcasters, the company says. In fact, SCN's J. Scott Wright told *BM/E* that one of the first sales was to a Sacramento, Calif., TV station.

The advantages of the idea are obvious, leading off with savings over the costs of buying and siting one antenna for each satellite. Programmers benefit,

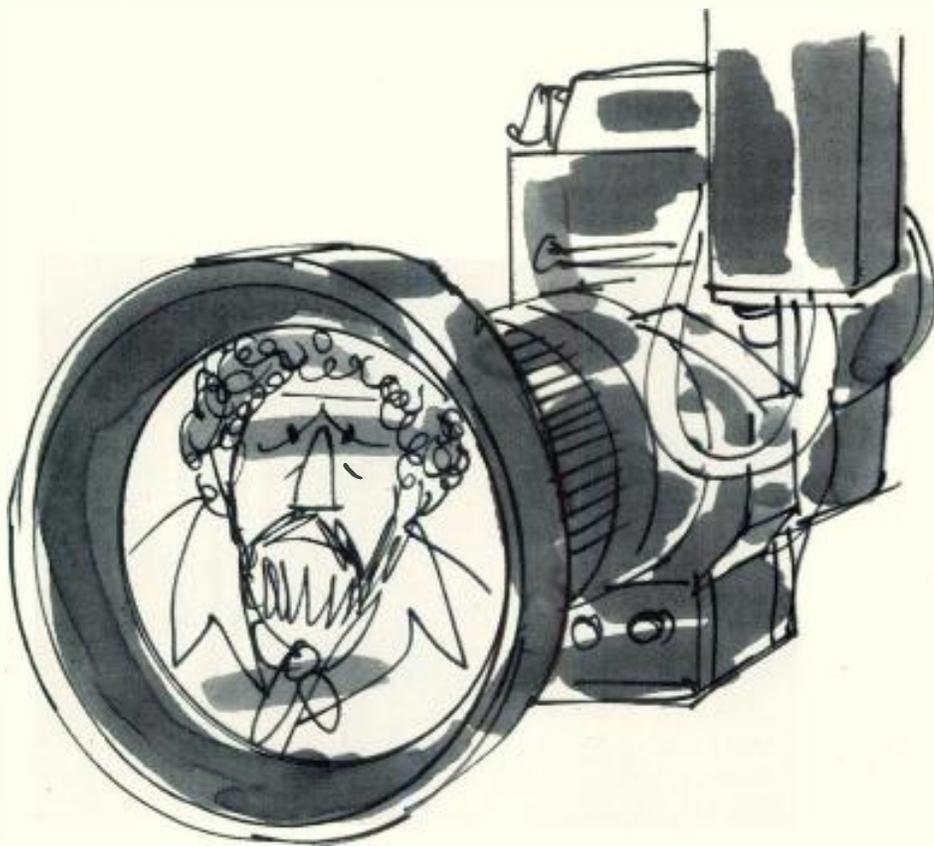

## Video equipment re-repairs ruining your reputation? Let MPCS improve your image.

When your "just repaired" piece of video equipment breaks down and winds up back in the shop, you blame the shop, but your client and/or employer blames you. It can ruin a person's reputation. Why not let MPCS improve your image.

MPCS has the kind of repair facility that optimizes equipment performance while making you look good. Our professionally trained service technicians, hand picked from among the finest in the country, are continually schooled by the major manufacturers (Ikegami, Sony, JVC, Panasonic, etc.) on the latest technology, to provide our customers with the quickest, most thorough, and most reliable service available.

Our newly implemented computerized parts inven-

tory, the very latest diagnostic test equipment, and our fifteen years in the video repair business are your assurance of the highest quality repairs. And to avoid down time, immediate replacement equipment is available, at a special discount, from our rental department.

If your present video repair service is spending more time with your equipment than you are, the problem isn't the equipment, it's the service. Improve your image — next time take it to MPCS. For further information, call in New York State 212-586-3690. Out of state, call Toll Free 800-223-0622. Ask for Service Dept.

MPCS is also Broadcast Video, Industrial Video, Rental, IPC, our video production facility, and Videomart, the largest home video and TV showroom in N.Y.



**MPCS VIDEO INDUSTRIES, INC.**  
MPCS Video Center Building 514 West 57 Street New York, NY 10019

Circle 108 on Reader Service Card

# Finally. Three-tube resolution in a one-tube camera.

One-tube technology has reached the level of three-tube performance. A new tri-electrode one-inch Saticon® tube with built-in bias light to reduce lag has made it possible to deliver excellent picture quality. In terms of resolution (450 lines) and stability (zero registration error, unlike three-tube cameras which must be registered), the FP-10 is far superior to other single tube cameras and comparable to many three-tube cameras.

A built-in image enhancer with a precision delay line provides sharp, crisp pictures. The ABO circuit, developed by Hitachi, extends dynamic

range and guarantees easy highlight handling. Even in low-light situations, the FP-10 assures you of excellent results with the help of a +6, +12dB high gain switch.

The FP-10 will let you shoot in more places than you thought possible with remarkable ease of operation. An ideal ENG and production camera, the FP-10 can also be transformed into a highly versatile studio camera with the addition of an optional 5-inch viewfinder and Remote Operation Unit (ROU).

Other features include: built-in

genlock; built-in color bar generator; a four-position color temperature filter; a bias light for reduced lag; auto white/auto black balance; and an available two-line image enhancer.

The high standards of quality you've come to expect from Hitachi are evident in the FP-10's construction as well. Built of die-cast aluminum alloy (not plastic), the FP-10 employs no cost-cutting shortcuts.

If you're looking for stability, portability, reliability and affordability in a one-tube color camera, your choice is the FP-10 by Hitachi.

Saticon is a Registered Trademark.



175 Crossways Park West, Woodbury, N.Y. 11797 (516) 921-7200

• New York • Chicago • Los Angeles • Atlanta • Cincinnati • Dallas • Denver • Seattle • Washington, D.C.



Circle 109 on Reader Service Card

## News

also, since cable operators equipped with Simulcast are not limited to just one cable satellite.

Antenna Technology Corp. of Orlando, Fla., manufactures the antenna for SCN. It sells for \$21,500; electronics can be purchased separately or through SCN.

### Precision Data Buys Arvin Video Recording Operation

Arvin Echo, the Mountain View,

Calif., manufacturer of magnetic recording and reproducing equipment, has been purchased by Precision Data, Inc., also of Mountain View. The company will revert to its former name of Echo Science, as it was known before its purchase by Arvin Industries several years ago. A Precision Data spokesperson told *BM/E* that no major changes were planned for the company, which will operate as a wholly owned subsidiary of Precision Data.

Echo's most recent product is the "Image Maker," a video disk system for preparation of graphics for broadcast news, sports, and commercials.

### Kansas City VHF Bought For \$79 Million

Media giant Hearst Corp. has agreed to purchase Metromedia's KMBC-TV, Kansas City, Mo., for \$79 million in cash — the second largest amount ever paid for a broadcast station. The sale, subject to FCC approval, was necessary to allow Metromedia's recent \$220 million purchase of Boston station WCVB-TV. Metromedia already owns five VHF stations, the maximum allowed by current FCC rules.

KMBC will be Hearst's fifth VHF station and its twelfth broadcast outlet. The station, in the nation's twenty-seventh market, is an ABC affiliate.

# Some broadcasters just don't believe what we say about ARISTOCART

They're the ones who haven't switched yet!

In a way we can't blame them. For example, that statement of ours about checking every Aristocart cartridge for phase stability and frequency response. **Every one?** Or the bit about **guaranteeing** performance on any properly aligned cart machine to AM/FM sound standards unmatched by any other commercial cartridge. Pretty tall claim! Fortunately, a lot of discriminating broadcasters have discovered we mean exactly what we say. They've made Aristocart one of the best selling NAB cartridges in the world. Why should you settle for less?



NAB  
TYPE A & AA  
CARTRIDGE

MANUFACTURED BY ARISTOCART DIV. WESTERN BROADCASTING LTD., 505 BURRARD ST., VANCOUVER, B.C., CANADA V7X 1M6 TEL: (604) 687-2844 TELEX: 04-54639

Circle 110 on Reader Service Card

### Coming Up: Nominees For Best Station Award

The December issue of *BM/E* will feature descriptions of stations across the country that have pooled the talent and resources available to them to produce the best service possible.

A ballot will be included for *BM/E* readers to choose the Best Station Award winners for 1981 in four categories — TV, AM, AM/FM, and FM. Be sure to vote for your favorites.

### Source Corrections

Readers of September's The Source directory may have missed Dimension 5 Sound, listed incorrectly under Oregon in the Reps/Distributors section. The company is located in Womelsdorf, Penn. (215) 589-2576 and Philadelphia (215) 668-8260, and reps the lines of dbx, Electro-Voice, JBL, Orban, Quantum, Sennheiser, Shure, Sony Broadcast, Technics, Telex, and UREI.

Erroneously omitted from the alphabetical listing was JSH Electronics, 15682 Producer Lane, Huntington Beach, Calif. (714) 895-2298. Outside California, call (800) 854-7651. JSH carries a complete line of electron tubes for broadcasting, television, and other applications.

MCI, Inc. has four distributors not listed in September. They are: Audio Industries Corp., Hollywood, Calif. (213) 851-4111; Pacific Recorders & Engineering, San Diego, Calif. (714) 453-3255; Pro Audio Systems, Seattle, Wash. (206) 367-6800; Audiotechniques, Stamford, Conn. (203) 359-2312.

### News Briefs

The Coalition for Better TV has called off a planned boycott of sponsors of TV programs the group considers offensive. The coalition is continuing to

# rugged, cost effective vans... Philips equipped.

If you want the best mobile... for the best price... and with the best equipment... start with Philips.


These 4 standard fully equipped mobiles will consistently and reliably produce the quality you require for prime time and network feeds.

Selectively equipped with rugged, reliable equipment including:

- Philips LDK14S ENG/EFP cameras, or LDK5B triax or LDK25B multicore remote/studio cameras, or Philips' new LDK44 ENG/EFP cameras,
  - ADC or CDL switchers,
  - portable or rack mount 1" C type VTR's...
  - even lighting kits and mics,
- these vans are ready to roll with self-contained airconditioning and power generator systems.


And, these vans are designed for expansion and customizing.

Plus we offer total financing.

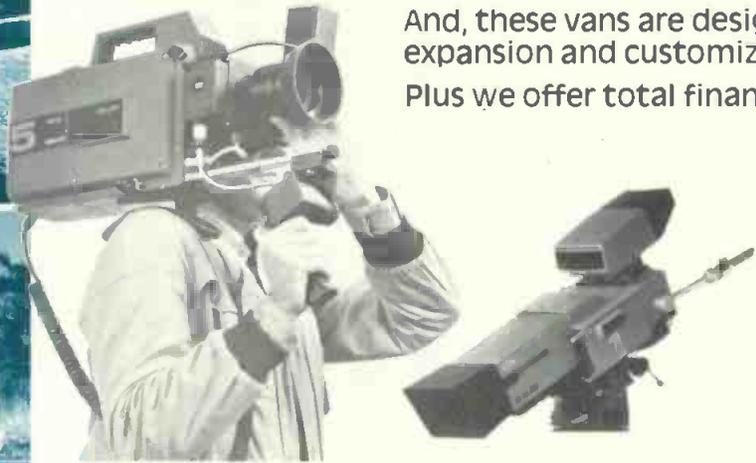

It's easy to get started. Call or write and our design team will aid you in selecting a model and equipment to match your budget and application.

Central Dynamics Corporation,  
900 Corporate Drive  
Mahwah, NJ 07430  
201-529-1550

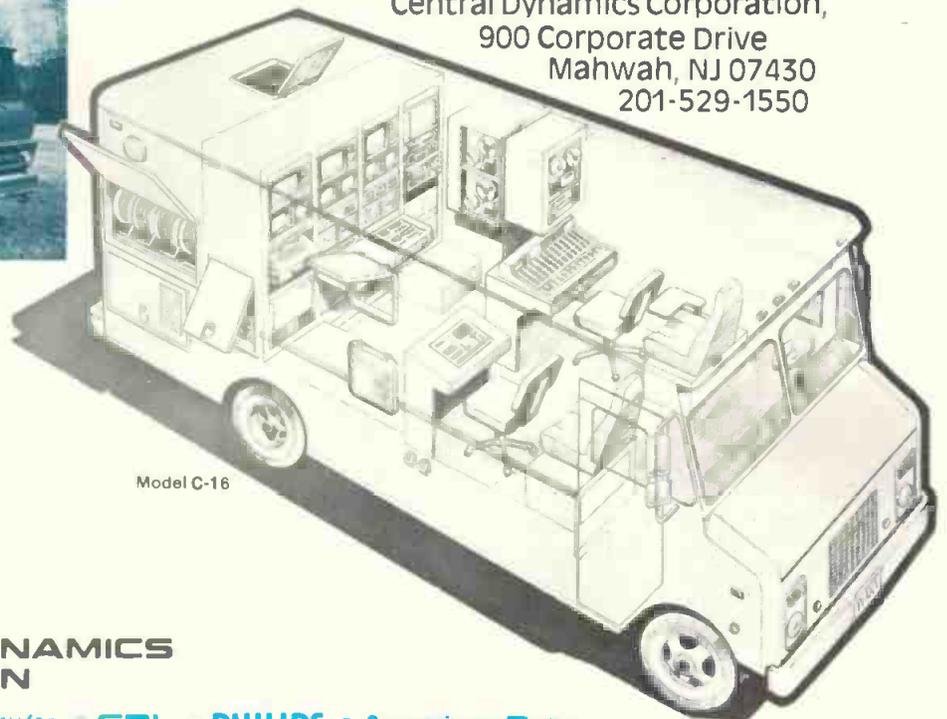

Model C-16




Photos courtesy Wolf Coach (Models A, C, D), Shook Electronics (Model B)

**A-10:** 10-11' production area, 1-2 cameras, 1 portable VTR, audio mixer, video switcher, audio cart recorder, and ancillary equipment.

**B-14:** 12-14' production area, 2-3 cameras, 1 studio VTR, audio console, production switcher, audio cart and reel/reel recorder, intercom, and ancillary equipment.

**C-16:** See illustration to right. 16-18' production area, 2-4 cameras, 1-2 studio VTR's; other equipment similar to B-14.

**D-22:** 18-24' production area, 3-6 cameras, 1-3 studio VTR's, A/V routing switcher, 2 audio cart recorders, telephone system; other equipment similar to B-14.



**CENTRAL DYNAMICS CORPORATION**

The U.S. Broadcast Company for ■ CDL ■ PHILIPS ■ American Data

Circle 111 on Reader Service Card

# Why 4 out of 5 earth stations for TV broadcasting are from Scientific-Atlanta

Model 8010 7-Meter Antenna. Designed specifically for television broadcasting. Exceeds all broadcast earth station requirements.

Full geostationary satellite arc coverage.

Highly reliable GaAs Fet low noise amplifier. Fully enclosed for weather protection.

Factory-installed de-icing systems available for severe weather conditions.

Easy to install. Minimal space requirements.



Scientific-Atlanta has designed, built, and delivered more broadcast earth stations than any other company in the world. A lot more. Here are some reasons why.

## SCIENTIFIC-ATLANTA MAKES THE ENTIRE SYSTEM

Scientific-Atlanta builds complete satellite earth station systems for the television industry. Our earth station packages give you everything you need to turn satellite signals into programming revenues. Antennas, receivers, low noise amplifiers, and installation and service.

## THE RIGHT SYSTEM FOR YOUR NEEDS

As the industry's largest manufacturer, we offer a wider choice in complete system packages. And we have the practical, *total systems* experience to help you put together the earth station to fit your technical requirements. *And your budget.*

A broadcast earth station can be as simple as our Model 8501 Basic Receive-only system. It consists of an antenna assembly, a low-noise amplifier (LNA), and a video receiver.

This is the basic downlink system. It's perfect for operations such as taping satellite programming for future broadcast.

For added flexibility as well as improved reliability, many broadcasters choose our Model 8502 Receive-Only Earth Station. It includes a second set of electronics to give simultaneous reception on two different satellite channels—a significant increase in signal receiving ability.

What's more, the additional electronics serve as back-up units for the primary

set, giving full station redundancy.

Should a malfunction occur in your primary on-line components, protection switching devices are included in the Model 8502 package which will automatically switch those functions over to the redundant stand-by units without interrupting on-line reception.

## SUPPLY YOUR OWN PROGRAMMING

Scientific-Atlanta has supplied 97% of all the satellite uplinks currently in use by commercial TV broadcasters.

When you buy a Scientific-Atlanta uplink, you get the entire package, from the initial site planning advice to the final proof of performance procedure.

If you prefer, the uplink package can include frequency coordination, FCC licensing, and supervision for pouring of the foundation (using local construction crews for minimum cost).

## MORE SATELLITE COVERAGE MEANS MORE PROGRAMMING

Scientific-Atlanta broadcast earth stations are available with full geostation-

ary satellite arc coverage. Your system can "see" all current and future domestic communications satellites from anywhere in the continental United States.

No other antenna system offers more satellite coverage.

Pre-programmable motor-drive systems are available for 7- and 10-meter antennas. You can switch from one satellite to another in 60 seconds or less.

For example, by entering a simple two-digit code into our remote-control antenna positioning unit, your antenna can be switched to a different satellite during a commercial break.

## WRITE OR CALL FOR INFORMATION

Clip this coupon for more information on the most advanced satellite earth station systems available for the television broadcast industry. Or call or write Ron Pearl at (404) 449-2064.

## Scientific Atlanta Communications

BME-11/81

Attn: Mr. Ron Pearl  
3845 Pleasantdale Rd.  
Atlanta, Georgia 30340

Please send more information on satellite earth stations for television broadcasting.

NAME \_\_\_\_\_  
TITLE \_\_\_\_\_  
COMPANY \_\_\_\_\_  
ADDRESS \_\_\_\_\_  
CITY \_\_\_\_\_  
STATE \_\_\_\_\_ ZIP \_\_\_\_\_  
BUSINESS TELEPHONE ( ) \_\_\_\_\_

United States: One Technology Parkway, Box 105600, Atlanta, Georgia 30348. Telephone 404-441-4000. TWX 810-766-4912, Telex 0542898  
Canada: 1640 Bonhill Road, Unit 6, Mississauga, Ontario L5T 1C8, Canada. Telephone 416-677-6555, Telex 06983600  
Europe: Horton Manor, Stanwell Road, Horton, Slough SL3 9PA, England. Telephone Colnbrook (02182) 3211, Telex 849406

Circle 112 on Reader Service Card

## News Briefs

monitor programs for "excessive" sex and violence . . . . A study by Action for Children's Television reports a **dearth of weekday children's programming** on commercial TV stations. Of the stations studied, 29 percent aired no regularly scheduled children's shows between 6:00 a.m. and 6:00 p.m. weekdays, and 62 percent had no regular after-school shows . . . . Storer Broadcasting has sold its only remaining radio station, **WLAK-FM**, Chicago, to Viacom for \$8 million . . . . **KAUT-TV**, Oklahoma City, has given up on its pioneer all-news format after 10 months, citing insufficient advertising and poor ratings.

NTIA has told the FCC that it supports **longer hours for daytime-only stations**. The filing seeks extended morning and evening hours and new methods for calculating interference protection . . . . The Eighth Decade Consortium sparked **strong viewer response** with its most recent production, "Fed Up with Fear" (see *BM/E*, October, 1981, p. 31). Hundreds of people called each of the five stations on telephone hot lines specially set up for the show . . . . Bonneville Productions won a **Clio award** for "Support Your Local Family," a special public service campaign sent to 1000 TV stations during last year's election campaign.

Thomas B. Keller, formerly of PBS, has joined NAB as senior VP of the department of **Science and Technology** (formerly called Engineering) . . . . The FCC should make it clear that the **Equal Access to Justice Act** allows broadcasters' attorneys in license revocation proceedings to receive fees from the government, NAB says. The association also stated that the FCC must hold **hearings on DBS** or deny Satellite Television Corp.'s proposal . . . . One DBS applicant, Focus Broadcast Satellite Network, says it plans to provide the **first DBS programming**, with target date of early 1984 on the Advanced Westar satellite scheduled for launch then . . . . By next summer, visitors to Toronto will have access to **2000 Telidon terminals** located throughout the city, with free information on attractions and accommodations. Pages will be sold to companies or groups wishing to reach the vast numbers of tourists that pass through the city . . . . *The Jeffersons* has become the first off-network TV show to be **syndicated with closed captions**, the National Captioning Institute reports.

RKO's new RKO Two radio net had **56 charter affiliates** for its debut this fall. The net hopes to sign 100 stations by next month and 200 by December, 1982. According to the Spring, 1981,


Radar survey, RKO One leads all other radio nets in audience growth, the network reports . . . . SIN has **added 27 cable systems**, bringing its affiliate total to 139 and moving for the first time into Wisconsin and Iowa . . . . **Satellite Radio Network**, 24-hour religious programmer, has added WROL, Boston, WZZD, Philadelphia, WFAX, Washington, and WPIT, Pittsburgh.

*Billboard's* third **Video Entertainment/Music Conference** will convene at the Beverly Hilton, Los Angeles, November 12 through 15 . . . . SBE will hold its fifth annual

**Northwest Regional Convention** in Seattle November 19 and 20 . . . . Rep. Timothy D. Wirth (D.-Colo.), chairman of the House Telecommunications Subcommittee, is the keynote speaker for **Scientific-Atlanta's Satellite Communications Symposium '81**, November 2 through 4 at the Atlanta Hilton.

Audio Independents Inc., is sponsoring "Dialogue '81: Radio . . . Waves of the Future," a conference for **independent and station producers**. The meeting will convene December 11 through 13 at the Asilomar Conference Center, Pacific Grove, Calif. For in-

## RAMKO AUDIO CONSOLES

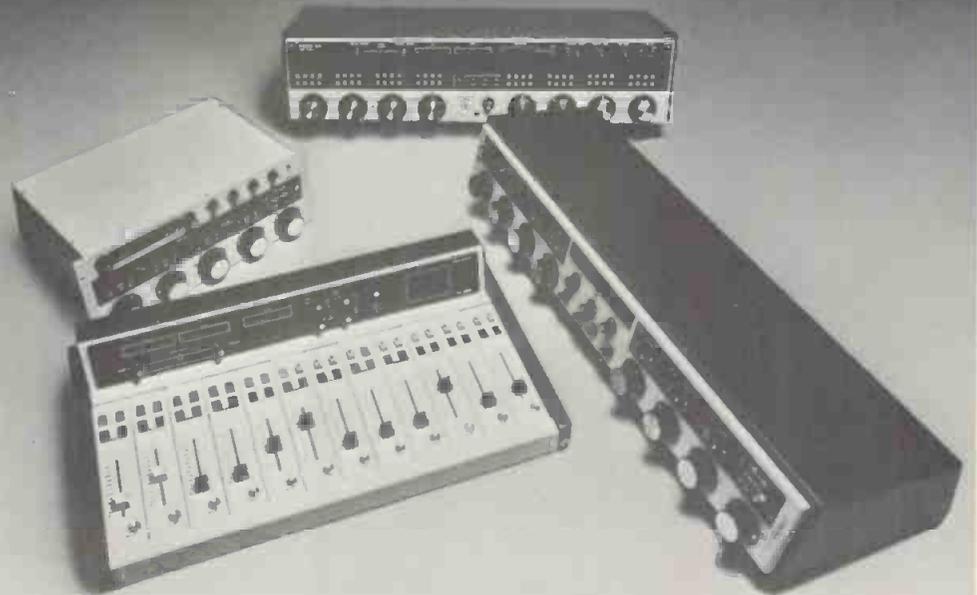

### ENGINEERED FOR YOUR BOTTOMLINE.

If you're under the impression all audio consoles are more or less alike, then you haven't seen Ramko's exciting "silent series" of 14 different models. Stereo and mono, and available in any input/output configuration you could possibly need, Ramko has pioneered many innovative features such as total D.C. control of all mixing and switching functions, solid-state balanced inputs and outputs, full-range input gain selects, switch selectable muting on all inputs, solid-state V.U. meters, and plug-in modules and I.C.'s.

Everything we manufacture is, and always has been, shipped on a two week trial basis and warranted for a full two years. On some of our industry standard consoles, four years! Write or call collect today for full information on the products that are engineered for your bottomline.

*Engineered For Your Bottomline.*

**RAMKO**

Ramko Research, 11355-A Folsom Blvd.,  
Rancho Cordova, California 95670 (916) 635-3600

Circle 113 on Reader Service Card

# The dawn of digital technology in broadcast audio consoles



## Harris MICRO MAC™

**Remarkable Memory.** The new Harris MICRO MAC™ is the first broadcast audio console with digital microprocessor memory. Also exclusive is the automatic logging option in a live studio operation.

**E.P.A. (Environmentally Protected Attenuator).** MICRO MAC's unique linear attenuator is immune to common control room hazards. Coffee spills, cigarette smoke and ashes, airborne dust and dirt—none of these show stoppers can stop MICRO MAC. And attenuator life is virtually unlimited!

**Modularity.** For both broadcast and non-broadcast applications, Harris'

modular design makes MICRO MAC ideal. Low-cost software changes and additional hardware will accommodate future expansion through 48 channels. *Without* changing the basic mainframe! Switching and level control of audio is accomplished by digital control signals from the console mainframe to input and output card cages. Control is software oriented.

The Harris MICRO MAC is a major breakthrough in audio console design...a bright new talent of the digital decade. For more information, contact Harris Corporation, Broadcast Products Division, P. O. Box 4290, Quincy, Illinois 62301. 217-222-8200.



**HARRIS**

COMMUNICATION AND  
INFORMATION PROCESSING

## News Briefs

formation, call the organization at (415) 864-0700 . . . . American Women in Radio and Television, Inc., will hold its thirty-first annual convention at the Hyatt Regency Embarcadero in San Francisco, May 4 through 8, 1982.

## Business Briefs

**Television Technology Corp.** of Arvada, Calif., will purchase Wilkinson Electronics, manufacturer of AM and FM transmitters. Wilkinson will be operated under existing management as a wholly owned subsidiary of Television Technology, which makes translators and LPTV transmitters . . . . **IFR Avionics, Inc.**, of Van Nuys, Calif., has agreed to purchase **Commerce Airborne Corp.**, manufacturer of ENG components and designer of custom avionics packages for broadcasting . . . . **Oak Industries** has bought an 81 percent interest in **VideoNet**, California-based producer of videoconferences and programming.

**Scientific-Atlanta's** Optima Division has appointed B.C. Electronic Sales as a rep for its line of enclosures. B.C. has offices in Shawnee Mission and Wichita, Kans., and St. Louis, Mo . . . .

**Klark-Teknik Electronics, Inc.**, has named several sales organizations: Musonic, Asheville, N.C. (704) 254-1514, for Georgia, North and South Carolina, Tennessee, and Alabama; Richard Lewis Sales, Willow Grove, Penn. (215) 659-0704, for southern New Jersey, eastern Pennsylvania, Delaware, Maryland, Washington, D.C., and Virginia; and Sierra Sales, Diamond Springs, Calif. (916) 626-8562, for northern California and northern Nevada.

Construction of **Sony Corp.** of America's new headquarters in Park Ridge, N.J., is on schedule and should be completed by next summer, the company reports. Its midwestern regional office has moved to 500 Park Blvd., Hamilton Lakes, Itasca, Ill.

. . . **Leitch Video** has headquartered its U.S. operation in the Greenbrier Industrial and Office Park in Chesapeake, Va., with actual production scheduled to begin early next year .

Group W has agreed to purchase four transponders on **Hughes Communications'** Galaxy 1 satellite, to be launched in May, 1983. Viacom also purchased two transponders on Galaxy 1 . . . .

**Wold Communications** will provide program origination and satellite transmission services for RCTV's new pay cable service. Wold has also reached a long-term agreement with ABC Radio Enterprises for satellite transmission of ABC's new national

radio program services . . . . **American Satellite Co.** will provide satellite transmission facilities for Dick Clark's new United Stations Country Music Network . . . . **Bonneville Satellite Corp.** will lease four transponders on the Spacenet Satellite System of Southern Pacific Communications Co.

Gannett Broadcasting has installed the first two DLS 6030 digital library systems from **MCI/Quantel** and will order two more . . . . Wakefield Manufacturing, the audiophile record pressing company, has purchased a **Sony PCM1610** digital audio processor . . . . The Video Systems Div. of

**Peirce-Phelps, Inc.**, has built a mini TV production van for Warner Amex of Mesquite, Texas . . . . **WLUP-FM**, Chicago, **KDAY-AM**, Los Angeles, **KVIL-FM**, Dallas, and **WRKS-FM**, New York, have become the first stations to purchase the **Aphex II** broadcast aural exciter.

**American Video Products** will provide the Mexican government with equipment for a sophisticated post-production editing suite for Mexico City's Ch. 13 . . . . **Audio & Design Recording, Inc.**, has sold a large number of Ex-press Limiter audio processors to Satellite Music Network.

# RAMKO TURNTABLE PREAMPS



## ENGINEERED FOR YOUR BOTTOMLINE.

Setting standards since 1970, there are five different models available. The MP-8 and SP-8 are the undisputed cost/performance leaders for the broadcast industry. Both feature balanced output; 0.05% distortion; 68 dB gain; +8 dBm out (+21 dBm max.); S/N: -77 dB;  $\pm 1.0$  dB RIAA; remote scratch and brilliance activation. Our top-of-the-line ESP-38 features improved performance specs like 0.03% distortion, S/N of -90 dB,  $\pm 0.25$  dB RIAA and +25 dBm out. The SP-8 and ESP-38 are also available in rack mounting versions.

Everything we manufacture is, and always has been, shipped on a two week trial basis and warranted for a full two years. On some of our industry standard consoles, four years! Write or call collect today for full information on the products that are engineered for your bottomline.

Engineered For Your Bottomline.

**RAMKO**

Ramko Research, 11355-A Folsom Blvd.,  
Rancho Cordova, California 95670 (916) 635-3600

Circle 115 on Reader Service Card

BM/E NOVEMBER, 1981 23

# "IN TWO YEARS, OUR HICCUPED ONCE OR TWICE."



"Our Sony BVE-5000 editing system is unbelievably reliable," says Randy Cohen, vice president and editor for Broadway Video.

"Amazing that Sony could come up with a state-of-the-art computerized system on its first try," Cohen continues. "And because it's specifically designed for one-inch, it lets me do more with my equipment than other editors."

Broadway Video is both a production and post-production facility in New York City. Its recent credits

include "The Best of Saturday Night Live," major political campaigns, promos for the cable network Showtime, and a variety of industrial shows.

"The BVE-5000 worked right out of the box and has been performing flawlessly ever since. With no problems of any kind. Unlike some other systems, whose manufacturers wait for customer complaints to get the bugs out, instead of thoroughly testing their equipment *before* it's sold.

"With its simplified keyboard, the BVE-5000 is

# HUMAN EDITORS MAY HAVE BUT NOT OUR SONY."

*Randy Cohen, Broadway Video*



easier to use, too. It has saved me 25% to 50% of the time other systems require. And since you don't have to be mechanically oriented to use it, the editors can be artists rather than technicians.

"Other advantages include variable search. Dual audio. Vertical interval time code. And the ability to interface with a wide variety of switchers.

"I'll be buying more Sony equipment in the future. Because there are enough reasons for indigestion in this business without machines that hiccup and burp."

Sony makes a full line of 1" and 3/4" broadcast equipment, including cameras, recorders, editors and digital time base correctors.

For more information, write Sony Broadcast, 9 West 57th Street, New York, New York 10019. Or call us in New York/New Jersey at (201) 368-5085; in Chicago at (312) 792-3600; in Los Angeles at (213) 537-4300; or in Atlanta at (404) 451-7671.

## **SONY**

Broadcast

Sony is a registered trademark of Sony Corp.

Circle 116 on Reader Service Card



# SM85

a studio quality  
condenser  
microphone  
that's not  
"studio bound"

This new high technology Shure microphone will change the way people think of condenser microphones. The SM85 is designed especially for on-stage, hand-held use. Its sound is unique—far more tailored to the special needs of the vocal: sizzling highs and a shaped mid-range for superb vocal reproduction, and a gentle bass rolloff that minimizes handling noise and "boominess" associated with close-up use. Ultra-low distortion electronics make the SM85 highly immune to stray hum fields. An integral, dual-density foam windscreen provides built-in pop protection.

What's more, the SM85 Condenser Microphone must pass the same ruggedness and dependability tests required of Shure dynamic microphones. As a result, the SM85 sets a new standard of reliability for hand-held condenser microphones.

The SM85 is *extremely* lightweight, beautifully balanced; it feels good, looks good on-stage, on-camera, on-tour. Ask your dealer for a demonstration of the new SM85, or write (ask for AL664) for full details.

## SM85

Cardioid Condenser  
Hand-Held  
Professional Microphone

The Sound of the Professionals.



Shure Brothers Inc., 222 Hartrey Ave., Evanston, IL 60204  
In Canada: A. C. Simmonds & Sons Limited  
Manufacturers of high fidelity components,  
microphones, sound systems and related circuitry.

Circle 117 on Reader Service Card

# RADIO

PROGRAMMING & PRODUCTION FOR PROFIT

## RKO: Riding High On The Satellite Wave

IS THE ACCLAIMED satellite revolution having a real effect on radio broadcasting? For one answer, see the description of Mutual Broadcasting's satellite system on page 00 of this issue. By putting its long-established radio network operation on the bird, Mutual is proving that the satellites really do work for radio.

Another example, that of RKO, shows that a well-thought-out satellite net can be built from the ground up and become successful in a relatively short time. Starting from scratch, RKO has built a body of affiliates, developed programming, and received support from advertisers.

RKO went on the air in November, 1979, with about 20 presold affiliates. Subscribers bring in the programs mainly through earth stations supplied to affiliates of the Associated Press. By October, 1981, the number had grown to more than 200 stations.

In the meantime, RKO decided to start two additional nets, RKO Two and RKO Radioshows. The original net was redubbed RKO One. RKO Two went on line in September, 1981, with about 50 subscribers (many sold in advance of the opening) by the end of that month. RKO Radioshows is in an earlier stage of development.

What RKO is doing has clearly won broadcaster acceptance. Its offerings include regular national and international news, produced by RKO's own large news organization, and tailored expertly to appeal to the audiences the nets seek: a younger, 25 to 34 group for RKO One, and a somewhat older group 34 to 45, for RKO Two.

The news operation has just moved into a brand-new editing and production facility at RKO headquarters. News editors have positions at which they can get active feeds from many sources, for background or for editing into recorded news segments. Nearby are complete production facilities and the "on air" studios.

RKO also is issuing a substantial number of commentary and interview



RKO Radio Networks' newsroom bustles as John McConnell (left) manager of RKO ONE confers with correspondent Gary McKenzie. Catherine Smith and Dean Shepherd, also correspondents, keep the copy moving

programs, plus a series called *Lifestyle* that briefly looks at problems and interests of the young audiences. Regular sports updates and other kinds of informative material are featured.

The entertainment segment has been highly successful. So far it has relied on one- to two-hour music specials, each highlighting an outstanding popular music performer. The specials present the music along with interviews, commentary, and biography. Previous specials have featured Art Garfunkel, Gino Vanelli, Rita Coolidge, Air Supply, David Gates, and Hall and Oates. The Hall and Oates special was carried on 150 stations and drew more than 10 million listeners, according to a survey by a research firm.

Overnight talk shows are another big part of the mix. The two now on the air are *Night Time America* and *America Overnight*. The latter is issued by RKO Radioshows and already has a substantial following.

Planned for January, 1982, takeoff are "mini-paks" on RKO Radioshows. These medium-length program blocks will be categorized by format — Country, Rock, talk, and so forth.

RKO is off to a whiz-bang start. Its progress in the next two or three years



There's nothing fancy about the Knox K50.


It's reliable; it's economical; it's basic; the simplest machine we make.

Come to think of it, it does have an independent preview channel... and shadow-edged characters... and a flash function... all as standard features.

Maybe it's fancier than we thought.



A DIVISION OF COMPUTER OPERATIONS, INC.  
5001-J Forbes Boulevard, Lanham, MD 20801  
301/459-2106 Telex 89-8327

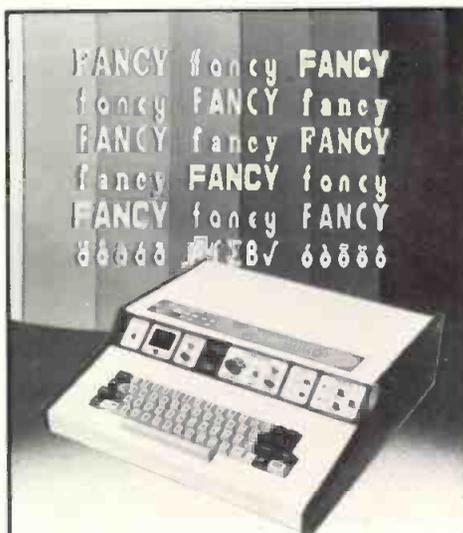

Do it with style. Better still, do it with *three* styles.

Knox calls it Multifont, and it's built into each Mod-16 character generator.

It's upper *and* lower case. It's accented letters. And it's resolution down to a *single* scan line.

It's just one of the features standard with every Mod-16.

It's also by Knox. Plain enough?



A DIVISION OF COMPUTER OPERATIONS, INC.  
5001-J Forbes Boulevard, Lanham, MD 20801  
301/459-2106 Telex 89-8327

Circle 118 on Reader Service Card

BM/E NOVEMBER, 1981 27

# A NEW concept in MICROPHONES

I'm Carl Countryman and I'm so excited about the EM-101 I must tell you why no other microphone offers you such fantastic performance and why the EM-101 is the most versatile mike you can own!

## 125 dB DYNAMIC RANGE

In terms of raw performance alone, the EM-101 is in a class by itself. The 25 dB noise level of the EM-101 is one of the lowest in the industry. With the EM-101 you can hear sounds in a quiet room that you can't hear with your own ears, yet it easily handles 150 dB sound levels without distortion or pad switching. That's over 300 times the threshold of pain! The EM-101 will completely eliminate microphone overload.

## LABORATORY FLAT RESPONSE

The EM-101 is GUARANTEED to have an incredibly flat frequency response; within 1.5dB of perfection over the entire audible range from 20Hz to 15kHz and we back that guarantee by shipping each EM-101 with its own individual computer verified frequency response curve. Listening tests cannot distinguish the EM-101 from precision laboratory microphones costing TEN times more!

## VERSITILITY

The EM-101 is about the size and shape of a stick of Dentyne chewing gum and has a non-reflective, black surface. It is also the most perfectly non directional microphone you can buy for recording or sound reinforcement. That makes it the ideal choice for stage, TV, motion picture, or conference work where variations in quality caused by motion and position around the microphone must be minimized. Unlike conventional microphones or "plate mounted" microphones, the EM-101's unique flat design allows it to be placed as close to the surface as desired to take full advantage of this traditional microphone placement technique.

## FEEDBACK AND LEAKAGE REDUCTION

The unique design of the EM-101 makes it almost completely insensitive to conducted vibration so it can be placed directly on or even inside an instrument where the sound level is high and you will obtain remarkably improved rejection of unwanted sound and reduction of feedback. Because PA systems feed back on response peaks, the EM-101's ultra flat response allows you to use more gain without feedback and will reduce or even eliminate the need to notch filter or equalize a system.

## YOU MUST TRY THE EM-101

I want you to have the experience of using a microphone with performance that rivals the human ear! I'm convinced that once you hear a truly accurate, uncolored microphone in your facility, with your kind of program material, for the affordably low price of \$234.50 U.S. you will never want to be without one!

Please call Countryman Associates or your favorite professional sound dealer to arrange a no risk trial of the incredible EM-101 microphone.

**COUNTRYMAN  
ASSOCIATES INC**

417 STANFORD AVE.—REDWOOD CITY, CA 94063 (415) 364-9988

Circle 119 on Reader Service Card

28 BM/E NOVEMBER, 1981

## Radio Programming

will tell us a lot about the character and fate of the satellite net in radio.

### Quiz show comeback continues

Temporarily stopped in its tracks by the Van Doren scandal of some decades ago, the serious quiz show has been making a steady come back in recent years. In the updated versions, the outcome depends on real information in the minds of the questionees. There is no added excitement from flashing lights, bingo number, super-fast-talking hosts, or huge prizes waiting just off stage.

CBS Radio and *Time* magazine are collaborating on a modern quiz show of this kind *College Bowl*, with strong listener response. The show pits competing four-person teams, each representing a particular college.

Intramural contests are followed by regional rounds and a national championship. The series has the full support

of the Association of College Unions, the international group of directors of activity (outside major sports) at colleges and universities in this country and abroad. ACU is organizing the teams and the initial contests at the colleges.

Answers are authenticated by *Time* magazine's research department. *Time* has also given \$20,000 to the College Bowl Scholarship Foundation, which makes grants to all schools represented in the national championship.

College interest in the show is expanding rapidly; some 500 campuses will be represented in this season's contests. *College Bowl* will be carried on the CBS Radio Network, as it has been for the last two years.

The half-hour show will be on the net each Saturday, starting January 9, 1982. CBS Radio affiliates are, of course primarily interested. But the success of the show suggests that the serious quiz has returned. With the right organization and sponsorship, it can attract a large audience. **BM/E**

## BM/E's Program Marketplace

# Syndicators Revisited

Al Ham's "The Music of Your Life"  
c/o Jim West  
7540 LBJ Freeway  
Dallas, Texas 75251  
Tel.: (214) 387-9888

IT IS NOW widely accepted that the 35-and-older group spends money in a big way. Teenagers have been forced to move over and make room for their parents and grandparents in the esteem of sellers, and consequently, of course, in programming for radio.

The new respect for the older demographic group is based on studies that show convincingly that people in their 50s, 60s and up have more discretionary income than older people had in the past, and moreover are spending it on themselves rather than saving it for their children. More and more, children are pushed out of the nest when they finish college and have to spread their own wings for flight.

A number of radio stations and syndicators are profiting from a swing to programming for the 35-and-up group. One of the most spectacular and successful of such operations is Al Ham's syndicated *The Music Of Your Life*. When *BM/E* first described this syndication (January, 1980), it was very young but already showing strength.

Since that earlier report, the program

has zoomed, both in the number of stations using it and in the results at those stations. By the time this report appears there will be at least 90 stations using the format, with virtually every major market represented. Among them are some success stories that might make a promoter of rock concerts wonder if he has the right product.

Typical audience share trends tell the story. WMAS in Springfield, Mass., came on in December, 1978 with a 0.1 share. By April, 1979, it had risen to 6.6; April, '80, 9.9; April, '81, 10.5. In the target 35-64 audience, WMAS reached a startling 18.5 share. WJAS, Pittsburgh, went from 0.7 to 6.6 in three months. WXKS in Boston, a 5 kW daytimer, climbed from near zero to a 4.0 share, remarkable for any station in the hot Boston radio competition.

WHLI, in Hempstead, N.Y., another 5 kW daytimer, moved up to number one among the 42 Long Island stations, going from a 1.7 to 4.1 share. After not showing at all in Arbitron with its previous format, WHLI now boasts more adult listeners than any other suburban New York station and more than many New York City stations.

KBER-AM, Abilene, Texas, went from 2.8 before *The Music Of Your Life* to 12.6 afterwards, becoming number one in its market with the 35-plus target

audience, with a share of 23.9. Other stations joining have all done well, if not as spectacularly.

Perhaps even more impressive is the success of *The Music of Your Life* fan clubs that many of the stations have established, inviting their listeners to join. The clubs often become a major social force in the community, sponsoring dances and other purely social events, local charity efforts, and group buying plans with local merchants that save the members money.

Again, the numbers tell an astonishing story. The club at WHLI has more than 30,000 members; WXKS in Boston has 25,000; KFJZ, Dallas, has 20,000. Jim West, who markets the program nationally, told *BM/E* that the nationwide club total is now close to 750,000 people. This large group is intensely loyal to the format, to the stations that distribute it, and to the advertisers who are heard along with it.

What is the magic in *The Music of Your Life*? We can see that it reaches listeners who were abandoned when rock music nearly captured the airwaves. The growth of Beautiful Music was one reaction to the rock invasion and the Beautiful Music listener has by and large been steadfast.

But the history of *The Music of Your Life* shows that there were a lot of listeners who were still not listening to the radio. What brought in so many of them is an expert flow of the non-rock hits of nearly five decades, going back to the 1930s and coming on down into the 60s and 70s. Al Ham mixes the most popular tunes of each period; one radio manager calls the program a "40-year hit parade."

Nor is it primarily a "big band" format, although some big band music is included. The main emphasis is on the most pleasing vocals, the real hits. Ham, a veteran in management of popular music, has apparently been able to evoke, on a large scale, the emotions of listeners hearing again the sentimental tunes they became firmly attached to in earlier periods of their lives.

This is the only logical explanation for the frenetic response to the programs. Jim West told *BM/E* that careful audience research indicates that the programs substantially enlarge the radio audience. A lot of people are back in who were out. Graceful, often sentimental vocal music brought them back.

But rock and roll music is not going away. The "death" of rock has been reported a number of times, but all these reports have proven to be premature. What we see in *The Music of Your Life* is a large step along the road radio programming is taking — toward diversification, specialization, the satisfying of a variety of tastes. The success of the format shows how important this can be.

BM/E



**BROADCAST  
ELECTRONICS INC.**

## Tape cartridge machines for every broadcast application

Since 1959 Broadcast Electronics has delivered almost 30,000 cart machines to broadcast stations worldwide. BE has the most comprehensive line of cart machines available - models and options for all applications and every budget. Delivery is usually prompt.



**Model 3100  
Slim Line**



**Model 3200  
Compact**



**Model 3300  
Standard**



**Model 3400  
Rack Mount**

### Series 3000

Features that nobody can match... Nortronic Duracore® heads; one or three cue tones with automatic fast forward optional; models for 1/3 and 1/2 rack width; and, a rack mount model for A, B & C carts.



**Model  
2100 RPS**


### Series 2100

Economical direct drive cart machines. Features two cue tones as standard (1 kHz, 150 Hz), Phase Lok LV head assembly, and exclusive mono/stereo switching. Available in record and record/playback, mono and stereo.



**Model 5300B**

Plug-in removable machined decks, long-life Duracore® heads and superb electronics make this the most wanted three deck cart machine. A companion recording amplifier can be used with the bottom deck. Available for mono or stereo and with three cue tones.

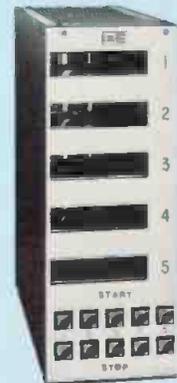

**Model 5500**

This 5-decker has a rugged machined deck, dependable direct-drive hysteresis synchronous motor, air-damped solenoid and the latest electronics. An optional sequencer is available.

a **FILMWAY** company




**BROADCAST  
ELECTRONICS INC.**

4100 N. 24th STREET, P.O. BOX 3606, QUINCY, IL 62305, (217) 224-5600, TELEX: 25-0142

Circle 120 on Reader Service Card

# GIANTS COME IN ALL SIZES.

Model Shown: 3106 in the new American Data Gold. Just one in a complete line of quality multi-level video production systems. Simple to operate, yet advanced in design and reasonable in price.

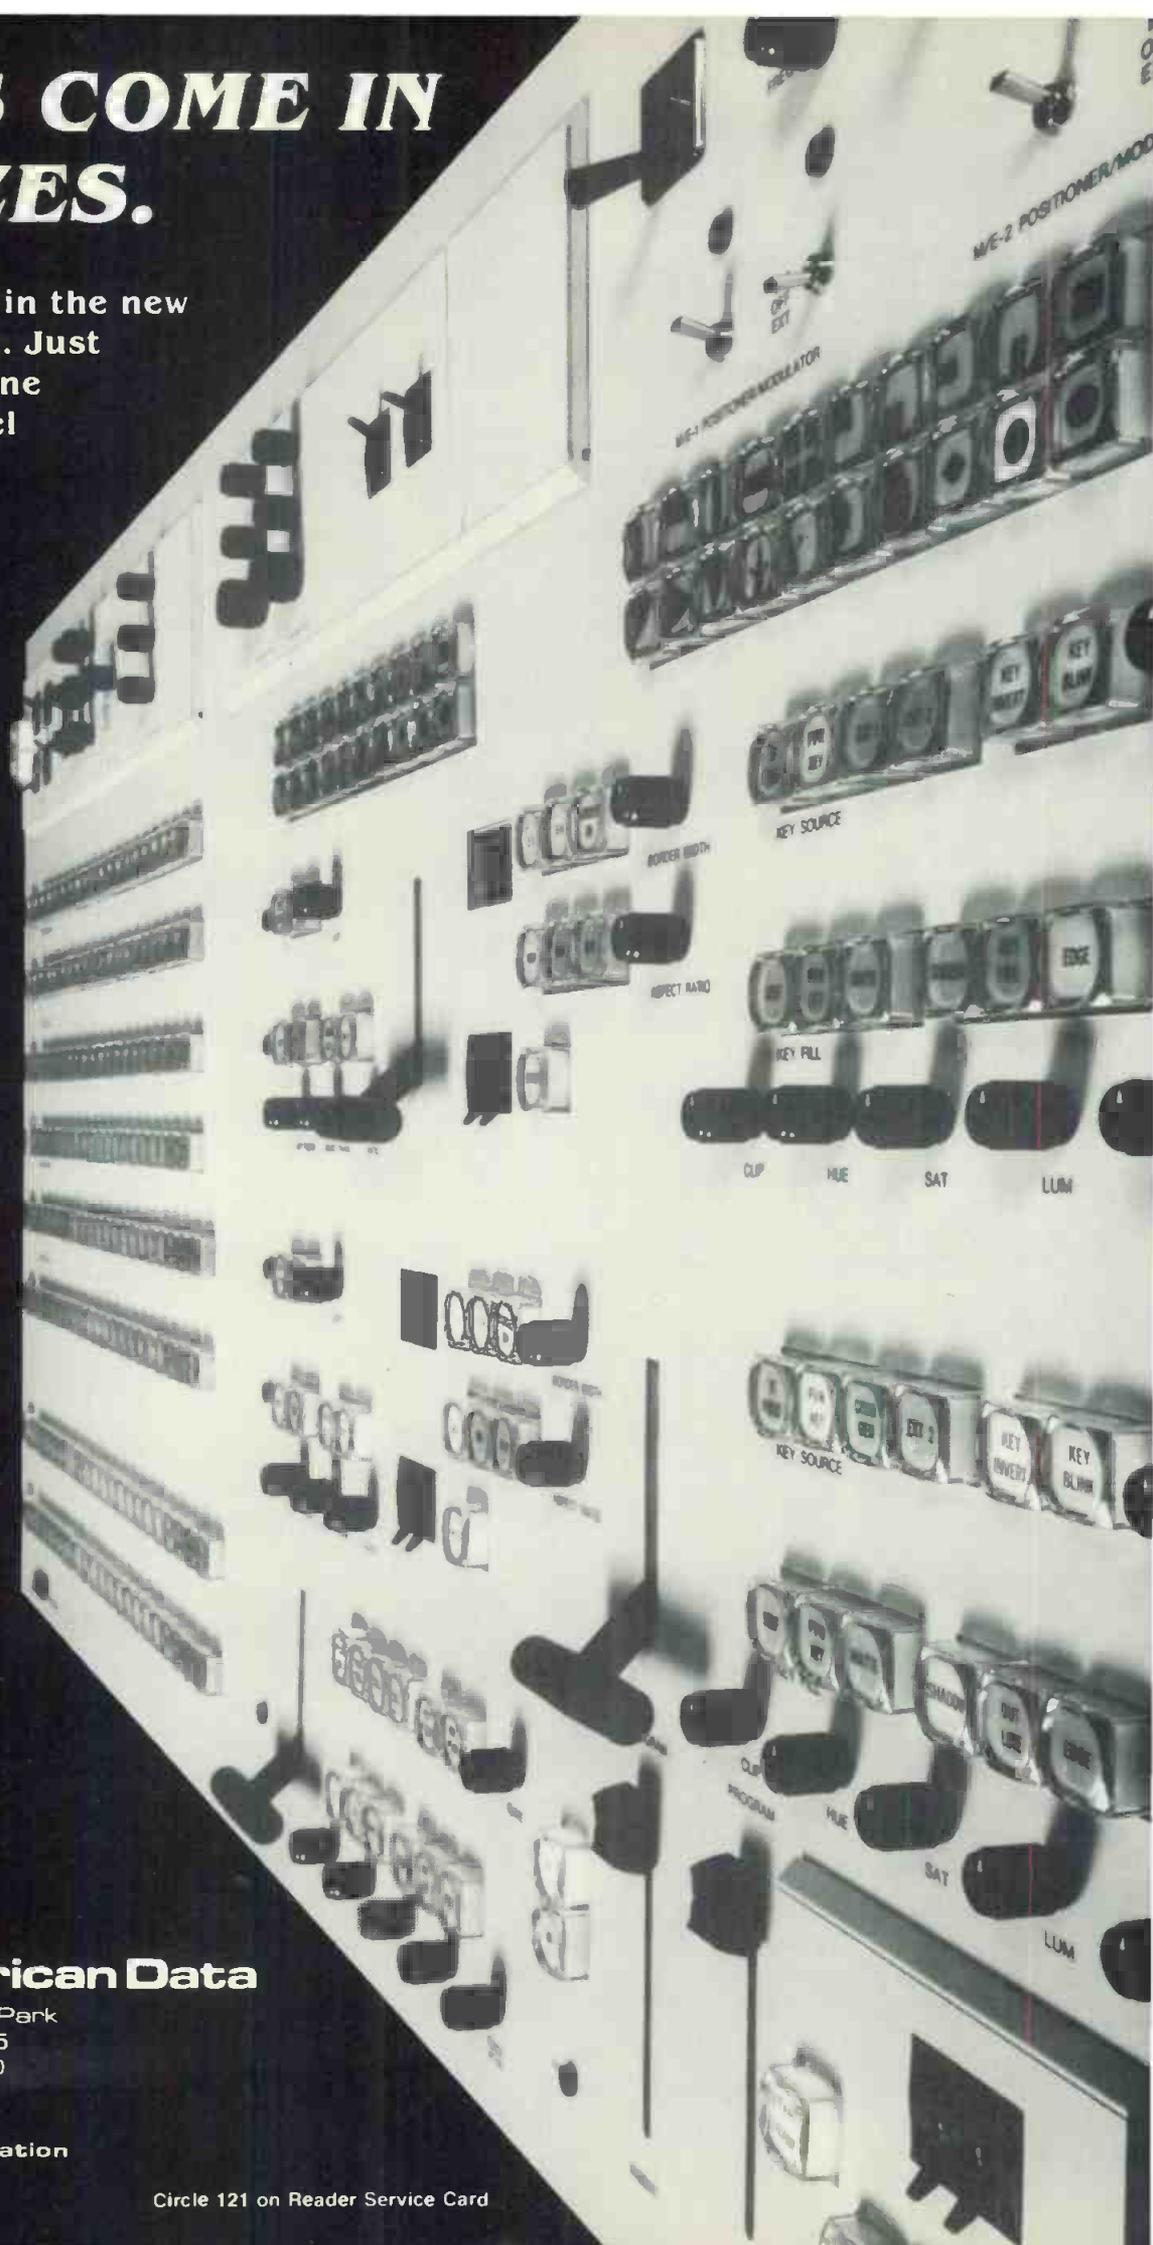

 **American Data**

401 Wynn Dr • Research Park  
Huntsville, Alabama 35805  
Telephone (205) 837-5180  
TWX 810 726-2125

Division of  
**Central Dynamics Corporation**

Circle 121 on Reader Service Card

# TELEVISION

PROGRAMMING & PRODUCTION FOR PROFIT

## WISH Fulfillment For An Expanded Late News

THE COMPARISONS are inevitable — *Nightbeat* telecast in Indianapolis, Ind., looks like a local version of ABC's *Nightline* — but WISH-TV's news director Lee Giles makes no apology. He is no Johnny-come-lately to the concept of longer, more probing newscasts. For nearly two years, WISH has aired a 45-minute late newscast against its competitor's half-hour. "Frankly," says Giles, "We intend to become *the* news and information station in this market." In keeping with the trend toward localism reported in this issue, WISH-TV has been getting a lot of sup-

port lately from the owners of the station, Corinthian Broadcasting. Until recently, Corinthian had the reputation of being a bottom-line oriented company that kept tight reins on the expenditures of its news departments. The company was reluctant to spend the funds that other group owners were spending to keep up with the latest trends in news production technology.

Corinthian, however, shifted its stance several years back to support its various news departments. The company is no less bottom-line oriented, but it is focusing on the importance of

local news.

"In meetings with corporate management and the general manager, it was decided to give the 45-minute newscast a try, and if it went well, to expand to an hour," explains Giles. It went well, but the next question was what to do with an hour of late news. Giles had meetings with most of the staff and asked for suggestions.

Two distinct half-hour broadcasts finally developed. The first was a traditional hard news broadcast, with the current anchor Mike Ahern updating the day's events. The second half-hour was to take an in-depth look at one story with a very local slant. This broadcast would have a separate anchor and additional staff who would work exclusively on *Nightbeat*.

Giles started an intense search for the anchor/producer for *Nightbeat*. "We felt that the newscast should reflect the personality of the anchor," Giles explains, "and the only way to do that was to have the anchor also produce the newscast." Even though a number of people outside the company were considered, the original hope was to find someone already on staff and familiar with the market. One name kept coming up — Josh Littman.

Littman had been at the station for eight years and was well-known in the community as a no-nonsense, aggressive reporter. Littman also had a good feel for production and what topics would appeal to the viewers. In announcing Littman's appointment, Giles said, "Josh's strengths in responding to breaking news, his ability to 'ad lib' in fast-changing situations, his interviewing techniques, his seasoned producing, on-air, and his reporting experience fit ideally with our plans for *Nightbeat*."

The plan for *Nightbeat* called for what Giles termed "a modular format" that would give the broadcast the ability to respond to the day's news in a length that would be appropriate. If the event called for the entire half-hour, the format could easily accommodate it. If not, other segments could fill out the program. Currently, sports and weather have spots in *Nightbeat*. The time devoted to sports and weather in the first half-hour was cut down to leave more time for news. When appropriate, a lighter piece airs at the end of *Nightbeat*.




WISH-TV's Josh Littman anchors and produces *Nightbeat*, the second half of the country's only hour-long late newscast. *Nightbeat* takes an in-depth look at local issues



Littman reviews a previous show that dealt with a religious crusade against rock music. His ability to handle live interviews led to his *Nightbeat* anchor spot

# For Rent: Quantel DPE 5000.

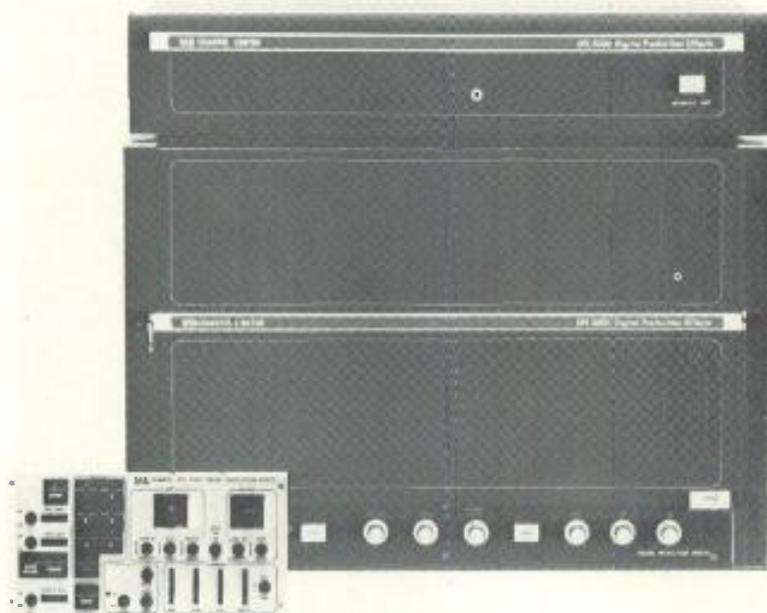

## From Camera Mart.

Now you can have the digital effects system you want when you want it.

For the first time, you can rent Quantel's most powerful system, the DPE 5000 from Camera Mart—with the expert maintenance and service that Camera Mart can supply.

Its "smart" console controls microprocessors that let your operator smoothly produce digital effects of optical quality. Such effects as: freeze, squeeze, flip, wrap, pan & tilt, border, compress or expand, push or pull, position, reduce noise, and tracking a chroma key area.

So whether you need what the DPE can do in post-production or live on-air—in the studio or on the site—it's yours to rent just for the calling. Call today.

Long term rental rates available.

### The Camera Mart, Inc.

456 West 55th Street, New York 10019 • (212) 757-6977/Telex: 1-2078

Video Department: 800 Tenth Avenue

Sales • Service • Rental

Circle 122 on Reader Service Card

## TV Programming



The broadcast went on the air July 6, 1981, just in time for the rating period, and pulled an incredible 20 share. *Nightbeat's* direct competitors are Johnny Carson and *Nightline*. The ABC entry came in with a 23 share. That puts *Nightbeat* only three share points behind a show that has been on the air for nearly two years. According to Littman, "It just shows that there is a need for and an interest in what we're trying to do with *Nightbeat*."

Another key to *Nightbeat's* success, explains Giles, "is that it is local and live." While he didn't say it, it is also slick. For example, on one recent program the topic was the FCC's recommendation to Congress to decontrol broadcasting, including elimination of the fairness doctrine. The broadcast opened with a cube wipe of four live interview subjects — the general manager of WISH Bill Stough, a spoke's person from the League of Women Voters, a socialist candidate, and a member of the Moral Majority. The subjects were in four different locations.

The following half-hour featured lively exchange on whether the fairness doctrine really served to get non-establishment viewpoints on the air or whether it proved a hinderance. Littman kept the conversation flowing, while holding a tight rein on the participants to stop digressions. The fairness doctrine is of obvious interest to broadcasters, but most television viewers have no idea how it affects what they see and hear. The *Nightbeat* segment did a good job of explaining its effect on Indianapolis viewers.

The *Nightbeat* staff has been expanded, but not a great deal. In addition to Littman, a reporter is assigned only

# WHY BUY TWO LENSES WHEN THIS ONE WILL DO?

WISH-TV news director Lee Giles (left) is the guiding force behind *Nightbeat*. Two years ago he expanded the late news to 45 minutes

to *Nightbeat* but the position rotates frequently to give all the staff reporters chance to delve further into a particular story than would be allowed during a regular newscast. In addition, there is a night photographer and an ENG editor. The producer of the late news acts as studio producer while the show is on the air, but Giles stresses, "Littman is the producer."

*Nightbeat* is definitely a local show, but sometimes national stories can spark a local link. When the skyways collapsed at the Kansas City Hyatt, Littman flew there and did two days of broadcasts. He tied it together with the collapse of an arena in Indianapolis several years ago. The question of safety in public places was made vivid with Littman reporting from the scene of the most recent disaster.

*Nightbeat* is also not afraid of tackling controversial subjects. Indiana is a conservative state, and many people support the Moral Majority. When Rev. Jerry Falwell came to Indianapolis for a rally, *Nightbeat* took a hard look at the group and its impact. At that time, the Coalition for Better Television, with the support of the Moral Majority, was threatening to boycott television advertisers, causing intense nervousness within the industry.

While *Nightbeat* is a newscast, it still retains an element of adventure. The staff feels that the broadcast can be and should be at the leading edge of what is happening. *Nightbeat's* mandate is to inform Indianapolis viewers more fully about the things that affect their lives. The show is still in the shakedown stage, but so far, as with a nicely designed piece of equipment, the shakedown has produced remarkably few rattles. **BM/E**



## Schneider 14X ENG/EFP lens zooms from super wide angle to long telephoto.

Changing lenses to handle changing conditions could cost you a once-in-a-lifetime shot. And that's why you should know about the Schneider 14X ENG/EFP lens. It gives you two-lens versatility in an economical one-lens package.

It can power zoom from 9mm–126mm. Or with the built-in 2X extender from 18mm–252mm. With the 6.3mm–9mm aspheric lens attachment, it can power zoom on the super wide angle shots. And, when the action calls for close and tight, it's got macro focusing.

The Schneider 14X is designed to bring out the best in Ampex, CEI, Fernseh, Hitachi, Ikegami, JVC, NEC, Panasonic, Philips, RCA, Sharp, Sony, Thomson and Toshiba  $\frac{2}{3}$ " cameras. Lightweight, compact, ruggedly constructed, and weather resistant, it comes with a complete line of accessories. Superb European optics combined with excellent f/1.7 sensitivity bring back crisp, clear pictures even under low light level conditions.

In addition, Schneider offers the 14X lens in a  $\frac{1}{2}$ -inch format for the new one-piece VCR cameras such as RCA Hawkeye, Panasonic and Sony. Schneider broadcast lenses are available throughout the United States and Canada from: **TELE-CINE CORP.**, 400 Crossways Park Drive, Woodbury, NY 11797; (516) 496-8500.

## Schneider 14X ENG/EFP

Tele-Cine Corp. is a subsidiary of Schneider Corporation of America.

Circle 123 on Reader Service Card

BM/E NOVEMBER, 1981 33

**FROM THE FROZEN  
WASTELANDS OF THE  
ANTARCTIC,**

**TO THE SEARING  
DESERTS OF KUWAIT,  
AND**

**1,700+**

**BROADCAST  
TRANSMITTERS  
LATER...**



# PAUL GREGG AND JOE NOVIK KNOW WHAT IT TAKES TO DELIVER A TRANSMITTER SYSTEM THAT CUTS IT!



**INTRODUCING  
ELCOM/BAUER.  
REINTRODUCING  
THE BAUER,  
GRANGER,  
SPARTA/CETEC  
RADIO  
TRANSMISSION  
PRODUCT LINE.**

It's a whole new game from an experienced team that have gathered the industry people, engineering expertise and back-up products and spare parts inventory to take care of all past and future business.

Give Paul or Joe a call at their new 22,000 square foot manufacturing facility in Sacramento—that is, if you're interested in getting on the waiting list for a new AM or FM transmitter system from one of the newest, oldest names in the business:



**(916) 381-3750**


Elcom/Bauer Broadcast Products □ 6199 Warehouse Way □ Sacramento, CA 95826 □ (916) 381-3750 Telex: 377-331

AM Transmitters from 250 to 25,000 watts, FM from 250 to 50,000, and a line of indispensable audio processing equipment.

Nationwide and worldwide representatives names may be obtained from the factory.

Circle 124 on Reader Service Card

# **LOCALISM: A NEW NEW TECHNOLOGY**

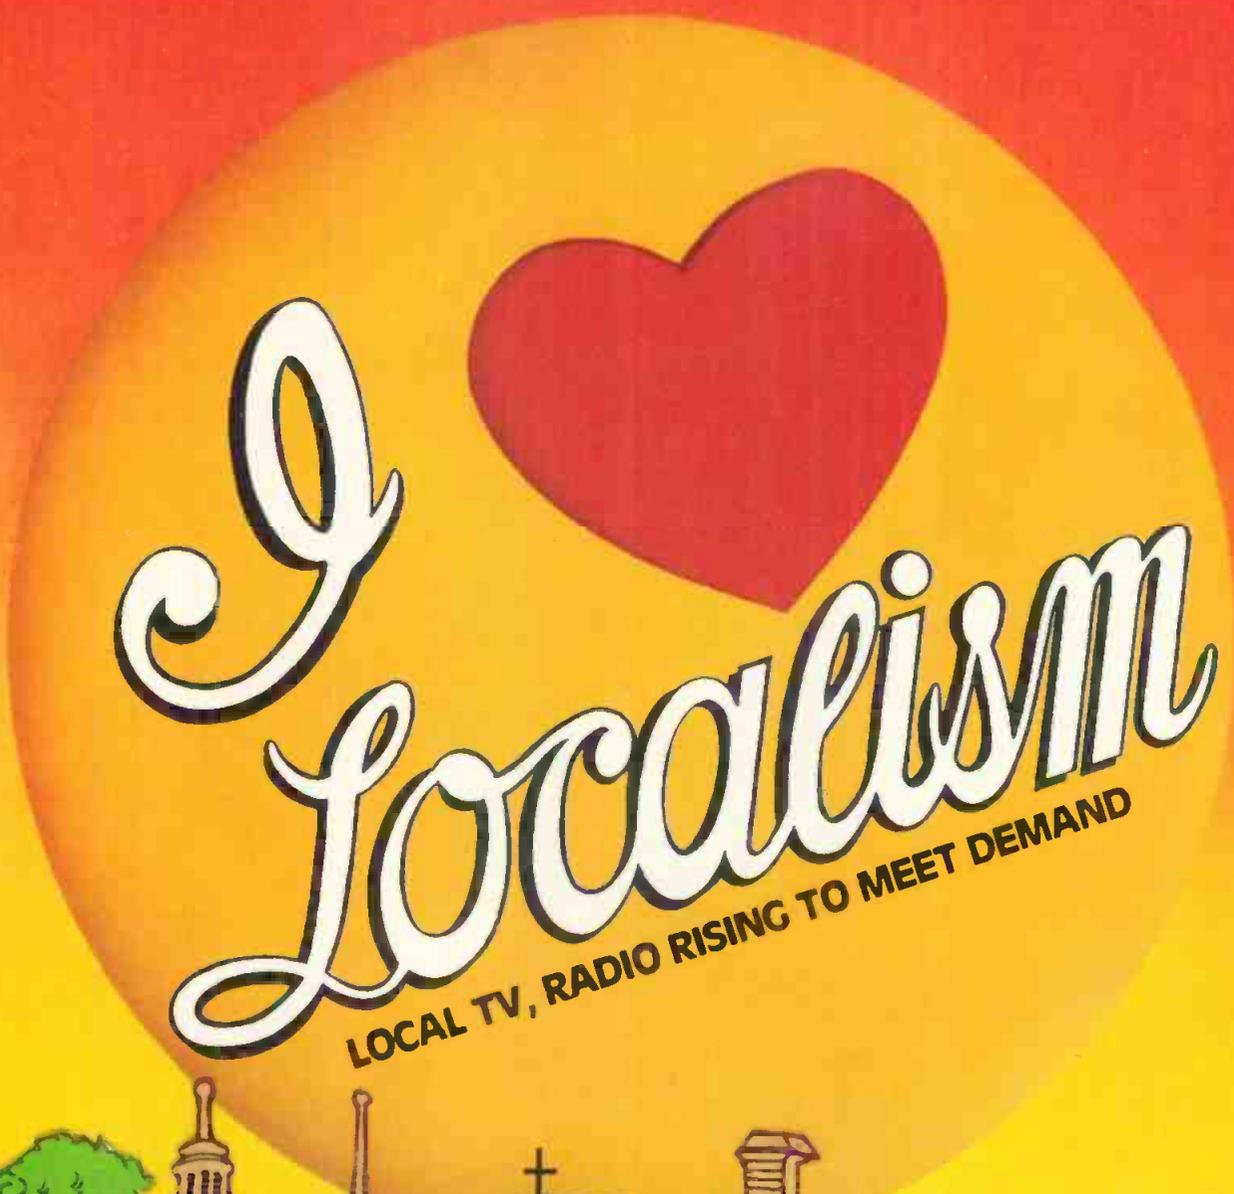

*I  
Localism*

LOCAL TV, RADIO RISING TO MEET DEMAND



# STRATEGY AND A TO SUPPORT IT

**For the past 20 years, more and more voices have been heard proclaiming the demise of broadcasting. But year after year, broadcasting, for both radio and television, has set new records for revenue. Each year, broadcasting grows stronger and stronger as its juggernaut is powered by twin forces: new ideas and new technology.**

A WELL-KNOWN communications consultant invited to address an investor's conference, is standing at the open bar after his speech. A stockbroker approaches him: "I just want to tell you," says the stockbroker, "how much I enjoyed your presentation."

The consultant nods his head in humility.

The stockbroker continues: "There's so much talk now about cable television, video disc, and the whole 'video explosion.' But tell me, what would you do if you had the capital to make a major investment in media?"

The consultant picks up his Scotch and soda, wraps a cocktail napkin around the bottom of the glass, sips the drink, leans his head back, glancing at the ceiling thoughtfully, and turns to the stockbroker: "If I had the money, I'd buy a license for a television station. If I had less money, I'd buy a radio station."

What the consultant has discerned from observing the activity in the commercial broadcast media over the past 20 years is that while the business is changing, people who are changing with it are prospering and those with foresight and an established position in currently popular media are changing faster and better than anybody.

As Bob Bennett (president and general manager of WCVB-TV, Boston) notes in his enlightening interview on page 55 of this issue, the new media are monsters with voracious appetites. Twelve, 24, 52, or 200 channels are meaningless without something to put on them. Broadcasters have the physical plant, human potential, and the experience to provide the bulk of what must go on these channels. That's the supply side. But local broadcasters also have the means to provide their audience with that which none of the new media are structured to provide. That's the *demand* side.

People are demanding that media tell them about themselves and their neighbors; that media give to them information, news, and entertainment designed for Main Street and not only for Hollywood and Vine. Just as the big-city afternoon newspapers have seen their audience whittled away by suburban newspapers, big network-affiliated stations are beginning to feel the pinch of independents, imported distant channels via cable, and pay TV, chipping

away at the prime-time audience. Some big-city affiliates are not standing for it. They've taken responsibility for their stations away from a passive "let the other guy do it" management and given it to the "we can do it better" team of managers. As just about everyone in the industry knows, WCVB's maverick, locally oriented management has boosted the station into the hands of Metromedia for a record \$220 million.

The sense that people want to know about themselves and their community is not new. The FCC's detested ascertainment policy now joins the ranks of other unconscionable bureaucratic burdens: "If it weren't required, we'd have to do it ourselves." As the stories on WWAC, Atlantic City, N.J. (page 39) and KICU, San Jose, Calif. (page 63) show, stations that align themselves with the communities they serve will prosper under the pressure of new media.

Technology, of course, has played a central role in all of this. As anti-gun control enthusiasts are fond of saying: "Guns don't kill, people do." Technology is not half as important as the people controlling it, and if the people controlling it don't realize its potential they won't be able to hit the broad side of a barn. ENG cameras and recorders, microprocessor controlled graphics systems, small-format recorders, videotape editors, microwave gear, computerized lighting systems, live-assist radio automation systems, business computer systems, frame synchronizers, still stores, reverberation units, noise reducers, and the rest of it have made it possible to give locally produced programs the technical quality associated with big-time network productions. The newest broadcast technology, satellites, also gives local broadcasters a worldwide supermarket of programs to choose from in attempting to satisfy the needs of their particular audiences. As each story in this issue unfolds, broadcasters should see that technology puts control in their hands. No longer can broadcasters legitimately say, "We can't afford to do that," but they may have to admit that they have neither the courage nor the will to take control of their own futures. The tools are at hand, the mission is clear. All volunteers, take one step forward! **BM/E**

# BANK ON US.

## In the Rack or out of the Rack, Videotek products are a wise investment.

And for good reason. Videotek concentrates only on monitors; the most comprehensive line of rackmount and tabletop professional color monitors. In addition, Videotek is emerging as a leading manufacturer of Broadcast Test Equipment.

We are committed to provide quality products,

personalized service and excellence in field back-up. Large impersonal corporations sometimes forget the Human Factors in conducting customer relations on a day to day basis. We don't!

Videotek products represent a solid capital investment. One you can bank on year after year.



# Videotek

125 North York Street, Pottstown, Pennsylvania 19464 • 215/327-2292  
9625 North 21st Drive, Phoenix, Arizona 85021 • 602/997-7523

Circle 125 on Reader Service Card

# WWAC: MONOPOLY ON LOCALISM

By David Hawthorne

**Atlantic City's first television station is following a careful game plan, using thoughtfully selected technology to achieve specific goals. By analyzing the needs of the community they serve, they've done better than building a hotel on Boardwalk.**

PROGRAM DIRECTOR Calvin Izard is finally getting some recognition — recognition from folks on the street who wave to him, from business people on the boardwalk who want to know how to advertise on WWAC, and from customers in restaurants who want to make program suggestions. All in all, as Izard puts it, Atlantic City is "the biggest small town in New Jersey." WWAC, Ch. 53, is New Jersey's newest television station and it is receiving a welcome from its audience similar to that which a glass of cool water would get from a desert patrol of the French Foreign Legion.

Clearly, the citizens of Atlantic county and surrounding South Jersey communities thirst for television even in a market where cable television makes the big-market New York City and Philadelphia stations available to 90 percent of the television homes. Like Coleridge's Ancient Mariner, however, the audience finds itself adrift on an ocean of media with, "Water, water everywhere/Nor any drop to drink." The market boasts reception of numerous over-the-air Philadelphia stations, plus the cable importation of New York stations. Even so, since the time of Ben Franklin, who called New Jersey "a barrel tapped at both ends," i.e. by New York at one end and Philly at the other, South Jersey residents have resented their submerged identity.

That has changed. Residents of Atlantic City and its environs now get their own news several times a day, along with numerous updates. They have their own television magazine show five nights a week. They get a rich diet of many of their favorite programs and movies from years gone by and even some of the newer syndicated programs. Soon, they'll get to see their own political officeholders and candidates for the first time on prime-time television. Even some area high school football rivalries that have excited neighborhood watering holes for the past half-century have finally become important enough for the world's most influential medium. To a very great extent, the strategy, purpose, and effect of WWAC is to improve the entire area's sense of self-worth.

Though Atlantic City is considered a part of the Phila-



"Six, Five, . . ." Camera operator/floor manager gets ready to signal WWAC's news director, Mike Crowley, that he's on the air with *News At Noon*

delphia market, the nation's fourth largest, it and the rest of the South Jersey coast are outside Philadelphia's A contours. A new UHF station in Vineland, N.J., will be offering over-the-air subscription television during prime time but, according to WWAC general manager Bob Bryan, it lacks adequate signal for penetration of the A.C. market. Local cable operators refuse to carry the STV station. WCMC-TV, Wildwood, N.J., is an NBC affiliate that concentrates its efforts in the area south of Atlantic City. So, despite a relatively heavy concentration of television stations, there is no other strong over-the-air television presence with a focus on Atlantic City.

When casino gambling hit Atlantic City some years ago, many people predicted a renaissance for the city. They were, to some extent, correct. While the city is among the fastest-growing in the United States, it still has a lot of problems, some related to the decay that occurred over the lean years when Atlantic City slid from prominence as a seaside resort and some related to its new growing pains.

A group of individuals from Philadelphia came to Atlantic City and sought out Frank J. Siracusa, a prominent local insurance broker with political connections, to discuss the idea of applying for the Ch. 53 assignment. Siracusa, according to Bob Bryan, turned down the Philadelphians but took up the idea with other prominent local citizens, including minority interests. His idea was that while A.C. needed a television station, it *really* needed a locally controlled television station. A four-year struggle ensued over the contested license which was

## WWAC: Monopoly On Localism

secured by Siracusa when the other contestants agreed to drop their competing application in exchange for financial settlement. WWAC received its finalized CP on October 9, 1980, and that's when the real work began.

The first man on board was general manager Bob Bryan, whose television background extends back to 1952. "The first job I thought I had to fill," said Bryan, "was chief engineer — it had to be someone who'd be hands-on and willing to try new things." With the good luck that seems to abound at WWAC, Bryan was able to hire Dan Merlo away from the CBS Network in New York. As Merlo put it, "A lot of people wondered why I'd leave CBS Net for a little UHF in Atlantic City, but the potential of this place is just unbelievable."

### Realizing the potential

With a July 1, 1981, target air date, Merlo had his work cut out for him. Consultant John Wilner had pulled to-



Program director, Cal IZard (standing) watches as director Ben Civenga (center) calls the shots. Civenga joined WWAC partly in order to work with the "quality equipment"



The WWAC plant was done on a turnkey basis with much of the assembly done on the erection floor at Peirce-Phelps' Philadelphia plant. Peirce-Phelps' chief engineer, Donald B. Leith goes over some of WWAC's rack-mounted equipment with staff engineer James Ridenour (right)

gether a list of technical descriptions of the station's needs but now that the plan was to become a reality, Merlo reexamined the package from top to bottom.

In November, 1980, architect Bernard DeAnnuntis got his first look at the ramshackle former Acme supermarket that was to become WWAC's studios and offices. Extensive renovation was needed for the entire plant, and construction guild rules forbade the non-union television system installers to work in the same building at the same time as the carpenters, roofers, electricians, and other trades. To meet the air date, though, work had to go forward. WWAC selected Peirce-Phelps of Philadelphia to produce a turnkey installation with nearly all operational systems constructed and assembled at Peirce-Phelps' plant and moved all at once into the new facility.

Coordination, obviously, had to be precise. Detailed drawings, two eight-hour meetings, and numerous phone calls between Dan Merlo and the engineers at Peirce-Phelps were virtually all that was required to bring about an installation that, according to Merlo, worked just about as it was called for on paper. There were, and are, some problems. The memory unit on the used System Concepts Q-7A character generator has been temperamental. The tower was misoriented 30 degrees during construction and as a result, the microwave STL found itself staring at a city water tower. The Microwave Associates MRC-1 will be in operation soon, however, when a new dish location assuring unobstructed line of sight to the tower has been secured.

Final purchase orders for equipment and systems were ready only four months and 20 days prior to air. Peirce-Phelps crews worked on their large assembly floor to bring together Industrial Sciences production, master control, and routing switcher systems using Datatek distribution amplifiers. System Concepts character generators and ADDA VW-1 frame synchronizers were rack-mounted. Space was provided for Sony one-inch VTRs and RCA quads. Ikegami HL-79B ENG cameras were selected, both for their quality and their 790 studio conversion kits. Tektronix test and measurement equipment was used, with lighting from Colortran for the 2000 square foot studio. ENG/field recording was delegated to a combination of Sony BVU recorders and Ikegami cameras. Two Ikegami telecines were ordered.

While this equipment was being assembled and tested in Philadelphia, work progressed on the Bogner antenna and transmission tower. A Comark CH. 53 transmitter was installed, and the Microwave Associates MRC-1 STL and transmitter remote control system was mapped out. "Technically," said Merlo, "we made about 95 percent of our expectations."

The mistaken orientation of the tower required temporary substitution of a two-hop circuit arrangement with the telephone company. The Ikegami telecines proved troublesome, though they are now close to performing as expected. But, while these complaints form the bulk of WWAC's technical shortfall, the staff's praise for most of the systems they purchased is uniform. Of the Ikegami cameras, Merlo is ecstatic. "I've never seen pictures this good, this consistently," he said. When Merlo realized that the cameras were expected to be on the street for news until 4:00 or 4:30 in the afternoon and reconfigured for the 6:00 p.m. news and 6:30 *Atlantic City Tonight* show, he thought the job would be tough. But when he found that the camera complement would also be employed for what turned out to be an unanticipated deluge of commercial

# A rising star in broadcast television.

Quietly and unobtrusively the Fernseh star is rising. More and more broadcasters are looking to Fernseh for innovation—innovation across a broad product line that may very well be the most comprehensive in the industry.

Here are eight specific product areas. Eight ways Fernseh can help you create better television pictures. So *your* star can rise with ours.

**Editors.** Our Mach One™ computer-assisted editor is easier to operate and provides more functions—including special effects and auto assembly—than any other editor in its class. *Circle item number 286.*

**Graphics systems.** The Compositor I™ graphics system gives you dual-channel versatility, pushbutton access to over 100 type fonts, a larger memory than any comparable system, and modularity so you can add functions when you need them. *Circle item number 287.*

**Cameras.** Unsurpassed Bosch quality is designed into every model in the complete line, ranging from the economical KCP-60 studio camera to the exciting new KCA-100 EFP/ENG camera with available fiber optics link. *Circle item number 288.*

**Videotape recorders.** The superiority of our Bosch BCN units is universally acknowledged. Now you can have BCN quality for every one-inch requirement, whether you need the world's lightest one-inch portable, or the world's first automatic multi-cassette system, or the world's only operational high resolution system. *Circle item number 289.*

**Automation systems.** Our TVS/TAS-1000 distribution switcher and TCS-1 machine control system bring new levels of efficiency to automatic control. *Circle item number 290.*

**Monitors.** Fernseh is giving you a choice you never had before. Our full line of color monitors now includes the superb MC-37 15-inch and MC-51 20-inch series. *Circle item number 291.*

**Noise reducers.** You can improve signal-to-noise ratio up to 18dB with the new Fernseh TDF-2 digital noise filter. The TDF-2 also includes chroma-to-luminance delay correction and image enhancement. *Circle item number 292.*

**Telecines.** From the revolutionary FDL-60 digital CCD—the most advanced telecine ever made—to the economical TCF-3000/Plus, Fernseh can give you higher quality and more performance than anyone else. *Circle item number 293.*

Judge Fernseh's star quality for yourself. Just circle the item numbers for the product areas of your interest on the card in the back of this publication. We'll rush literature off to you.

If you can't wait, call right now, toll-free: 1-(800) 821-7700, Ext. 701 (In Missouri, 1-(800) 892-7655, Ext. 701.). Fernseh Inc., the Video Corporation of Bell & Howell and Robert Bosch, P.O. Box 15068, Salt Lake City, Utah 84115.

*From now on,  
look to Fernseh.*

## FERNSEH

© 1981 Fernseh Inc. All rights reserved.

## WWAC: Monopoly On Localism

*All assembled systems were checked out at Peirce-Phelps prior to disassembly, shipment, and reassembly in Atlantic City. Here the American Data master control electronics, ADDA VW-1 frame syncs, and Datatek DA system are examined using the Tektronix T&M system*



production requests, Merlo was ready to pronounce the plan unworkable. Then the HL-79s rolled in off the street and Merlo discovered that he could set them up into studio configuration with the 790 kits in just under five minutes. Merlo still shakes his head and calls the performance of the camera systems "simply miraculous."

Merlo is just as enthusiastic about some of the other equipment. The Comark transmitter is "supurb" and he is particularly pleased with the service and attention he's received from Comark. "We had a problem with the klystron performance initially," said Merlo, who was surprised when one morning an English gentleman arrived to explain that he was there from EEV in the U.K. to look into his problem. "The switching systems from ISI," Merlo commented, "are performing as well or better than we expected." Production switching is via an ISI Model 1206 while master control uses an ISI 821, capable of automation, and routing is through an ISI 1100 Series switching system.

From March through April of 1981, the rest of the WWAC managerial staff was put together. One of the earliest arrivals was program director Calvin Izard, formerly a producer/director for 12 years with NJPTV. Though his commercial television experience was, in his own words, "nil," he had produced nearly 2000 shows for NJPTV and had the very important quality of deep roots in the South Jersey community.

Izard first came aboard as a consultant. Merlo was quick to approach Izard and question him deeply about his programming plans. If this was to be a "local independent" television station, then engineering had to have a clear understanding of the station's programming definitions in order to develop a plant capable of fulfilling that mission. Izard admits to knowing very little about the technology (he concedes that that is probably a mistake), but he was able to articulate his plans for Merlo, who

concluded that the station needed "a little bit of everything."

The picture that Merlo got from Izard was of a station that would do a lot of EFP and ENG, would rely heavily on bartered programs and movies, and would be lightly staffed. Merlo already knew that his own engineering staff would be young and largely inexperienced in broadcast television, so he realized that one primary consideration for the equipment was simplicity of operation. The heavy reliance on films and older syndicated product, however, implied a need for two-inch quad machines, which he knew would require much more care and attention than the Sony one-inch equipment. Merlo eventually acquired two rebuilt TC-70C VTRs.

As the 16- to 17-hour program day began to emerge, Merlo soon found that much of his backup equipment was being forced into the front lines. Izard recalls being asked to make a lot of compromises as budget lines were drawn tighter. "Dan [Merlo] would come to me and ask me things like, 'Do you want clocks or do you want microphones?'" and I'd think, "Well, if I make owning a watch a condition of employment I can get along without the clocks, but I gotta have microphones."

### Every silver lining has a cloud


General sales manager George Campise joined the WWAC staff to find two joyous things: this small-market UHF station had installed a Station Business Systems BAT-1700 sales, traffic, and accounting computer system and local businesses were indeed anxious to advertise on WWAC. The computer system helped make his three-person sales staff more efficient, and the pent-up market demand helped make them more effective.

The tough part was that very few of the local businesses had any television advertising experience and, concomitantly, had no commercials ready. Fortunately, the sta-

Another  
iNNOVATIVE SWITCHING iDEA ...



# Model 904 Video Production Switcher

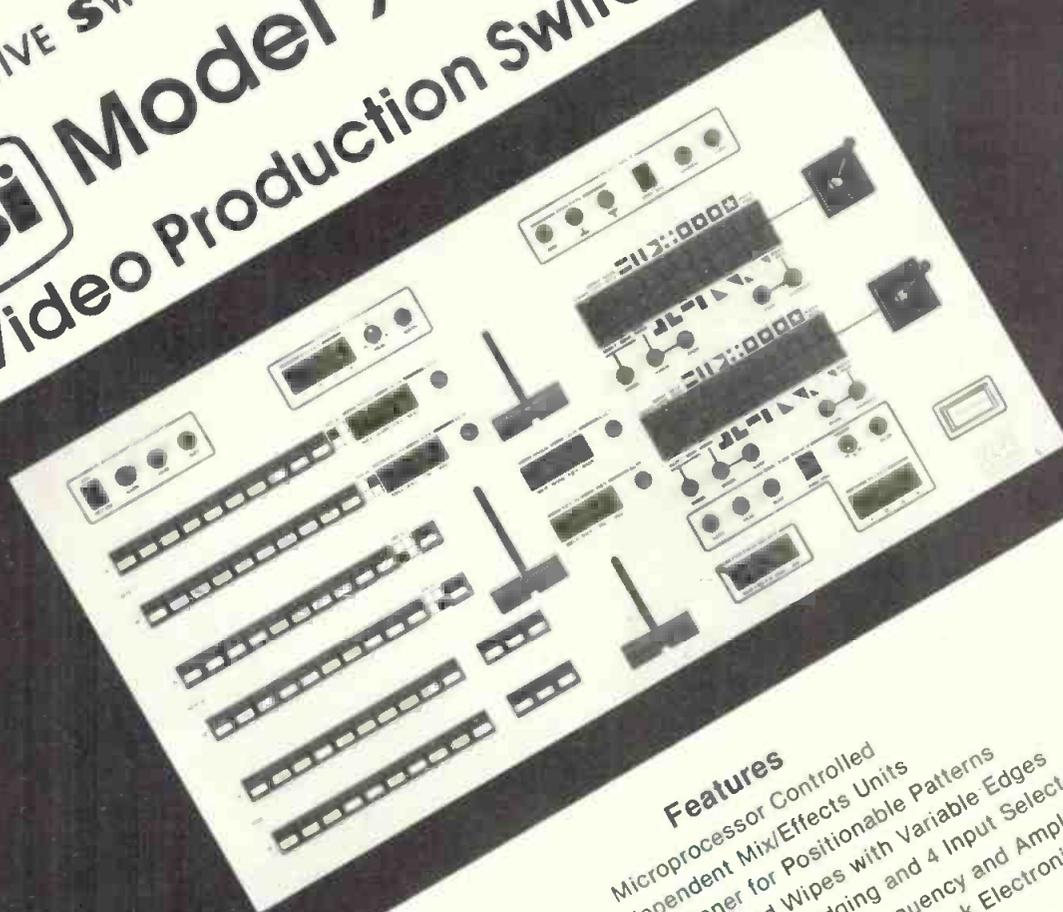

## Features

- Microprocessor Controlled
- Independent Mix/Effects Units
- Joystick Positioner for Positionable Patterns
- Hard, Soft, and Bordered Wipes with Variable Edges
- Downstream Keyer with Key Edging and 4 Input Selector
- Modulation of Wipe Patterns with Variable Frequency and Amplitude Controls
- Digital Control Logic from Control Panel to Rack Electronics, enabling
- Dual Pattern Generators each with 16 patterns including Star, Circle, Diamond, Square, Corner, Diagonals and Three Rotary Patterns
- Computer Interface Capabilities
- Combination of Modes on each Mix/Effects System, enabling Mix, Wipe, Key Mix-Wipe, Mix-Key or Wipe Key on each Mix Effects Systems
- Two Year Warranty
- Available in NTSC, PAL versions

ISI also produces custom video systems built to customer requirements. We encourage the use of our assistance and invite inquiries.



### INDUSTRIAL SCIENCES, INC.


3521 S.W. 42nd Avenue  
P.O. Box 1495  
Gainesville, Florida 32602  
U.S.A.

### TELEPHONE

Outside U.S.A. 01 (904) 373-6782  
In Florida (904) 373-6783  
Sales (800) 874-7590  
Service (800) 874-7874

### CABLE

TWX 810-825-2307

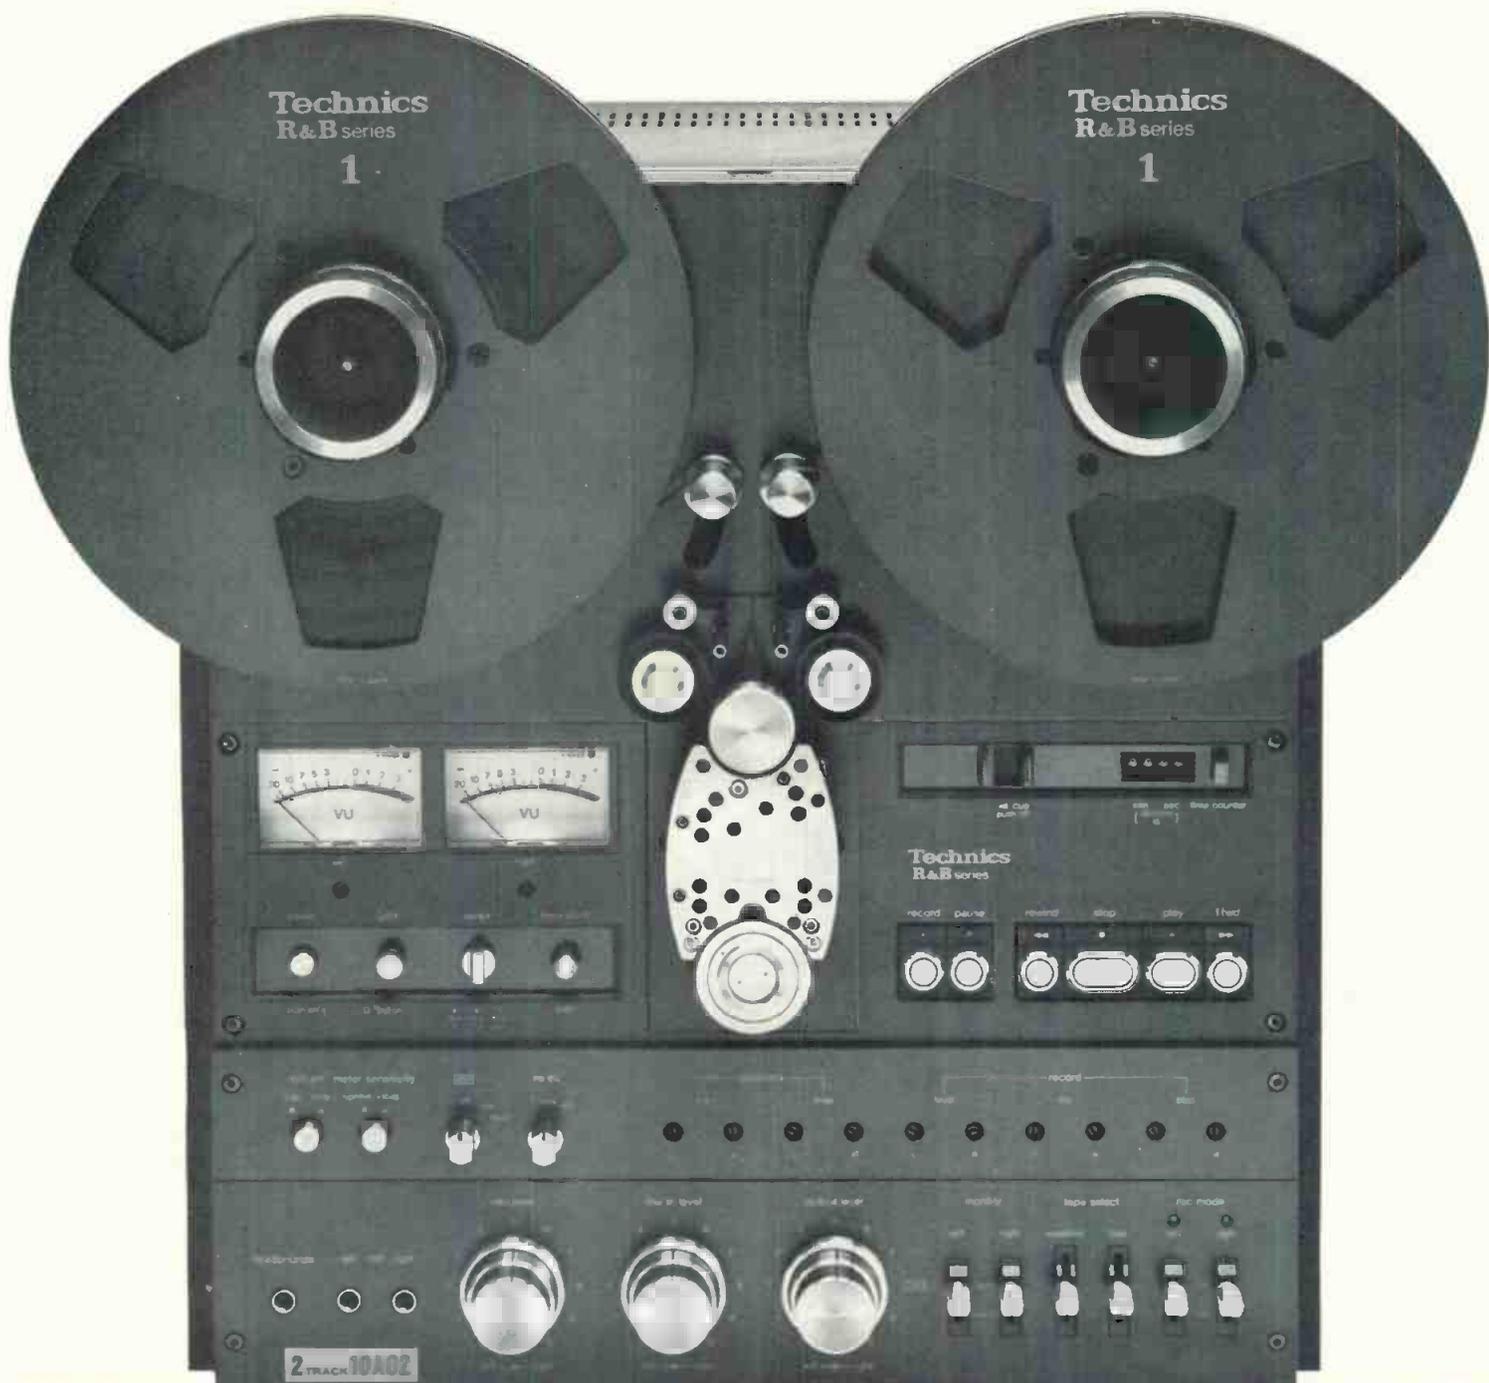

The technology that made Technics turntables the No.1 choice will make this Technics deck your No.1 choice.

You'll choose Technics RS-10A02 tape deck for the same reason 85 of the top 100 radio stations choose Technics turntables: The performance and reliability of Technics' quartz-locked direct drive.

Like our turntables, the RS-10A02 gives you the precision of a quartz-locked direct-drive motor. But you also get Technics' isolated loop tape transport system which optimizes tape tension to virtually eliminate signal dropout while reducing modulation noise and wow and flutter.

Studio pros will appreciate the RS-10A02's full complement of ten front-panel controls. Like playback and recording EQ adjustments, bias controls, and playback and recording level calibrators. When used with the built-in test-tone oscillator, these controls will give you optimum recording performance no matter what kind of tape you use.

The RS-10A02 also has extremely durable SX Sendust heads, IC logic controls and just about everything else you could want in a professional 2-track deck.

So before you buy any reel-to-reel deck, audition the RS-10A02 and see why it's your No. 1 choice.



For more information on the Technics R&B Series, call 201-348-7470.

**Technics**  
R&B series

Circle 128 on Reader Service Card

## WWAC: Monopoly On Localism

A Berkey Colortran lighting system covers the studio which houses WWAC's news set and Atlantic City Tonight set

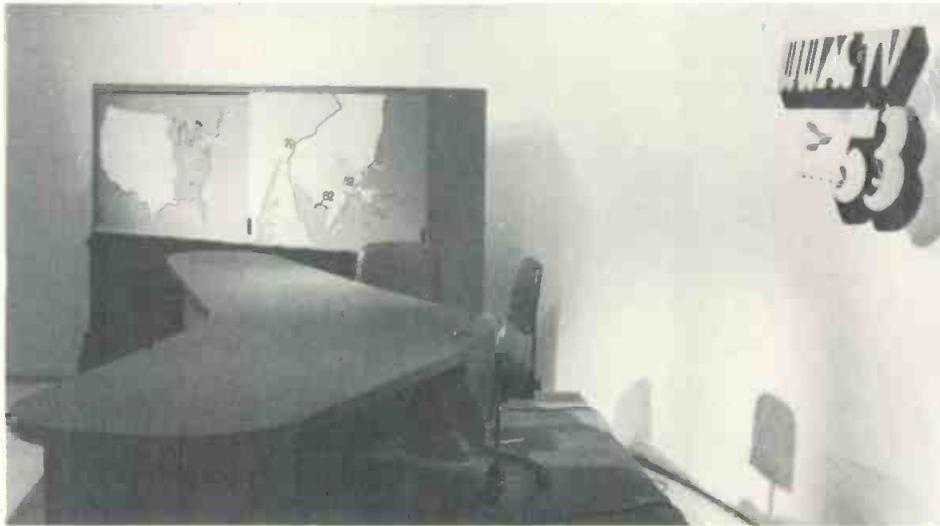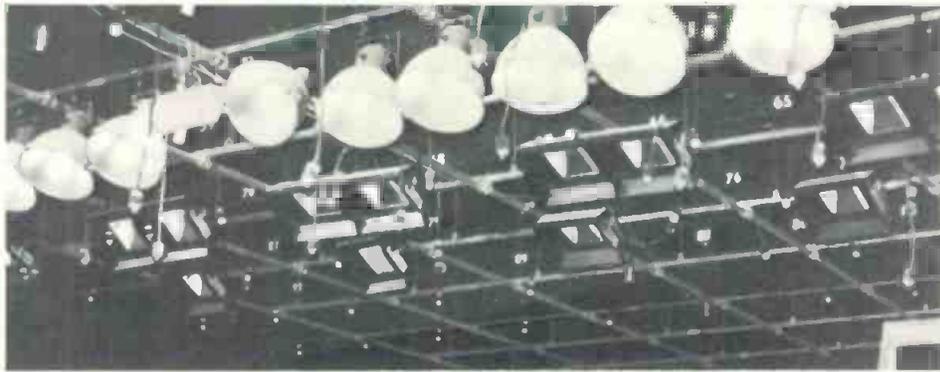

tion's own advertising agency was headed by Ron Sherwood of Philadelphia, who had considerable commercial production experience, a private pilot's license, and his own private plane. Sherwood began to fly down to Atlantic City on a regular basis to produce commercials for WWAC clients. Some commercials (nearly all were 30-second spots) used still photography, voice-overs, and text, but many more required field production. Merlo's "reserve" BVU-50 and spare Ikegami HL-79B were put to use. Of the two portable setups at WWAC, one had been allocated to news and the other to programming. In the weeks preceding air, the *Atlantic City Tonight* crew had put some 30 segments in the can for the magazine show, but with the added commercial load, *Atlantic City Tonight* started looking for more in-studio segments. Small-market television proved to be not only smaller, but

more intense.

Sherwood soon found that he was doing far more work because of his client than for his client. WWAC's own advertising had taken a back seat to the development of commercials for its air.

The commercials are produced at cost for the client. Sherwood writes, produces, directs, and often does the voice-overs for the spots. WWAC provides the equipment and technical crew. In general, the spots are equal in quality to retail commercials shot in markets much larger than A.C. The spots are shot and edited on  $\frac{3}{4}$ -inch, dubbed to one-inch master reels, and aired on a quad spot reel assembled each night. The assembling of the spot reel generally takes 10 to 13 hours and, as with all other activities at the station, the entire staff contributes to the improvement of the system.

## WWAC: Monopoly On Localism

The station is now conforming to a uniform spot break format, which means that each program interruption will be exactly two minutes long. Each two-minute break will consist of four elements, three of which will be constant, with only the commercial element changing from day to day. Right now, the break consists of a PSA, program promotion, "testimonial," and a commercial. The testimonial is a 30-second promotional spot in which local celebrities and officials make welcoming remarks about the station. Some 80 of these spots were produced before the station went on-air; they will be phased out over the coming months and replaced by new commercials. There will undoubtedly be commercials to replace these spots; midnight to 8:00 a.m. studio shift has just been started to produce commercials exclusively.

Most of the spots so far have been for automobile dealers, clothiers, and other local retail outlets. For shopping mall spots, participating stores are wrapped around a theme for the mall. The bulk of the outside-produced commercials either originate with the casinos in Atlantic City or are part of the bartered programs that make up a large portion of the station's schedule. The casino spots highlight the casinos' entertainment, dining, and hotel accommodations. On-air promotion of their gambling activities is prohibited by the FCC.

Calvin Izard reports an interesting phenomenon: the viewers like the commercials! "It could be," said Izard, "that for the first time, viewers are getting information about sales, specials, and products that they can use." Prior to WWAC, Atlantic City residents could have been frustrated by a bombardment of commercial information that was irrelevant because it would mean a trip to New York or Philly. General manager Bob Bryan loves the bartered spots for two reasons: they reduce the cost of

programming and lend a prestigious look to the overall package. "I know a lot of stations don't like barter deals," said Bryan, "but for a new station, they're great."

### News and programming

For a long time, more Atlantic City citizens knew the names of the New York City and Philadelphia mayors than knew the name of the Atlantic City mayor. They knew more about the politics of Philadelphia's city council than they did about the campaign for county freeholder. They learned of the murder at Broad and Walnut in Philly before they heard about the murder on the corner of Atlantic and Tennessee. They knew that dinner would be kept warm for delayed commuters in Queens and Bryn Mawr, but they heard nothing about the trailer truck that jackknifed on near-by Route 40.

Now, Atlantic City and county citizens get news about their area at noon for 15-minutes, at 6:00 p.m. for 30 minutes, and 11:00 p.m. for another 30 minutes. In addition, they get one-minute news updates at 8:00 p.m., 9:00 p.m. and 10:00 p.m. They also have Atlantic City news on the weekend. *Atlantic City Tonight* (weekdays at 6:30 to 7:00 p.m., with a repeat at 11:30 to midnight) brings them a dizzying array of feature reports on local events, visiting celebrities, tips, local characters, and South Jersey culture. There are even news and public affairs specials that probe local issues. Last month, viewers actually saw and heard their politicians and candidates for political office debate on the issues in prime time before a live audience of fellow citizens.

The WWAC news department is under program director Calvin Izard. The news director is Bob Crowley, a former *Atlantic City Press* newspaper reporter. Crowley's knowledge of Atlantic City politics and the South Jersey community in general was a big plus, even though he had no broadcast experience. Nevertheless he's adapted to broadcasting nicely and now anchors the *Atlantic City at*

*Sony Type C machines are slated for most of the post-production work and local production. While syndicated programs and daily spot reel runs on the quad machines, many of the vintage movies are dubbed to the one-inch equipment*





## INNER VIEW 3: A closer look at Conrac Monitors

### Comb Filter Separator: Resolution Solution at 3.58 MHz.



Conrac's Comb Filter Separator delivers the high resolution needed for today's high performance camera and taping equipment. It removes color information from the composite video signal without the luminance loss in the 3.58 MHz region produced by notch filters.

Conrac's Comb Filter takes advantage of spectrum interweaving to separate luminance from chroma, without reducing luminance bandwidth.


But the best part of Conrac's Comb Filter is that it gives you this improved picture clarity without the drawback of conventional comb filters. Because, unlike conventional comb filters which exhibit heavy dot patterns in the luminance path, Conrac utilizes non-linear techniques to virtually eliminate these patterns around vertical and horizontal transitions.

### Conrac Quality: Computer-controlled for the 80's.

The implementation of a failure analysis documentation system has become an essential new tool in

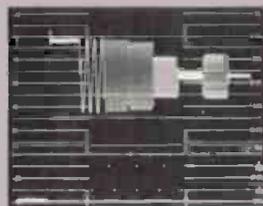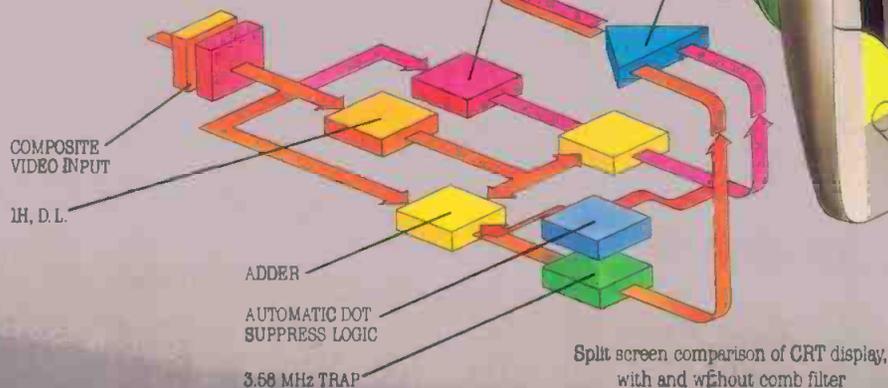

1. Multiburst test signal with conventional bandpass and notch luminance/chrominance separator.

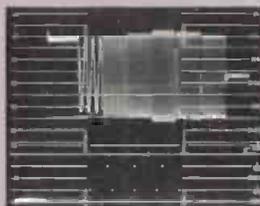

2. Multiburst test signal with Conrac's Comb Filter luminance/chrominance separator.


the quality factor. This system provides the capability of daily test analysis from four different product test and inspection areas. The net results are improvements in product quality and long term reliability.

### Conrac Technology: Over 30 years of leadership.

Conrac's track record of technical innovations stretches back nearly three decades; and what we've learned since then goes into every monitor we make today. That is important to you because the more technology we pack into each monitor, the more performance you will receive from it.

Comb filter separator and computer-controlled quality are just two ways Conrac technology can save you time and money.

For the complete inner view of Conrac technology, call or write us today. Conrac Division, Conrac Corporation, 600 North Rimsdale Avenue, Covina, California 91722, Telephone (213) 966-3511, Telex: 67-0437.

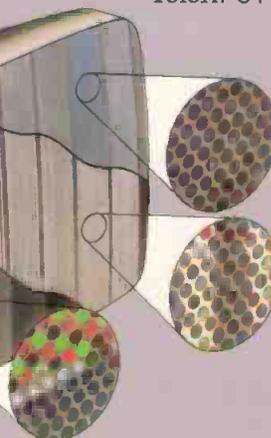

Residual dot patterns virtually eliminated, using dot suppression technique.

Quality you can take for granted.


## WWAC: Monopoly On Localism

Noon news, basically a rip-and-read 15-minute segment with slides and occasional footage from the previous evening's newscast. It's anticipated that *Atlantic City Tonight's*, co-host Lynn Wiedner, a former Miss New Jersey, will take over the non-anchor slot as well as the weather segment on both the noon and 6:00 p.m. telecasts. In the meantime, the on-air experience that Crowley is gaining is helping him to understand the peculiarities of electronic journalism.

The main newscast is the 6:00 p.m. *Atlantic City News*, anchored by Norma Muchanic. Norma doubles as the principal field reporter and manages, to almost everyone's amazement, to get three solid ENG pieces per day.

Weekend news duties are anchored by Dick Heather-ton, a popular DJ at WCBS-FM, New York, who wants to break into television news. Dick's presence is big-market and polished, something that has not gone unnoticed by local newspaper reviewers. Though TV news is new to him, he does it well, and reviewers say they find his weekend news spots a plus for the station.

The news programs achieve excellent technical results from their Sony BVU field recorders, BVE editing systems, and Ikegami cameras. As with everything else in the station, there is very little technical margin in terms of backup or replacement systems, so the scene gets a little hectic around 4:30 p.m. when the news crew rolls in with its field footage. Both edit rooms are placed into service while the Ikegami HL-79Bs are mounted into the 790 studio conversion kits. Camera setup and adjustment is

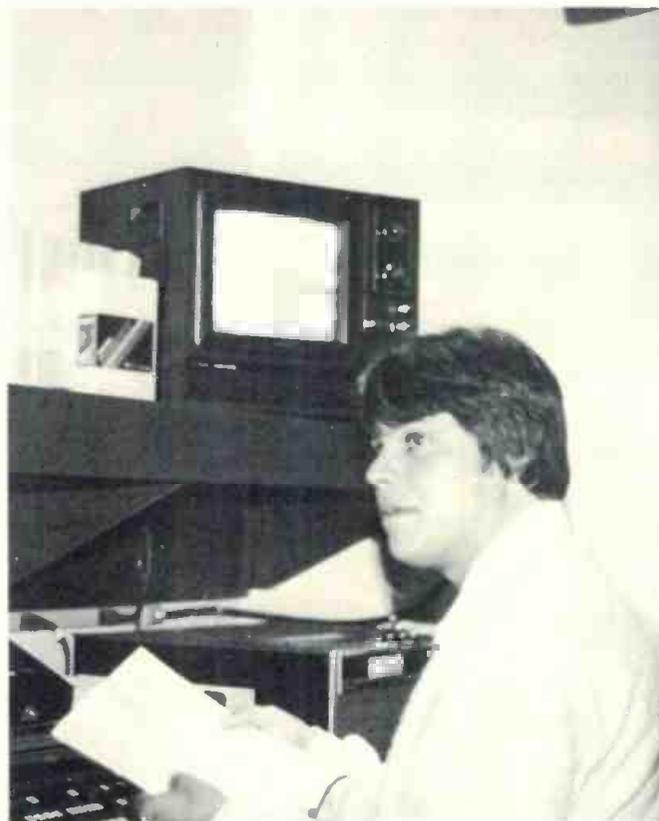

*Ben Civenga edits segments for the Atlantic City Tonight program using Sony 3/4-inch decks and a BVE-500 editor. Civenga's success in pulling the show together has altered his responsibilities to those of producer*

accomplished in only 10 minutes when there is time to spare, and in less than 10 minutes when there isn't.

If there is a hitch in WWAC's news operation, it's the rather delicate role that the station plays. WWAC is an unabashed cheerleader for Atlantic City, and some of the stories that crop up don't always reflect the upbeat aspect of a city struggling for rebirth. The casino industry, for example, is central to the successful revitalization of the town, but it is also responsible for much controversy. Many of Atlantic City's minorities and poor people feel that the casinos have not produced the slice of pie they were promised.

While WWAC does not steer clear of controversial stories coming out of the casinos, it makes sure that it has its facts straight before giving the stories prominence. There is clearly no desire on the part of WWAC management to portray Atlantic City as faltering on its road to recovery. It must be remembered that WWAC is locally owned and locally operated, and that when it comes to "badmouthing South Jersey," the residents get plenty of that from outsiders. In time, the station may strap on its journalistic pearl-handled six-shooters, but for the time being it is playing more schoolmarm than Lone Ranger.

When WWAC went on-air, however, discussions were held over whether or not it was ready to go with its full news agenda. Some people thought that the news programs should be phased in, but others, and especially the stockholders, felt that news had to be the centerpiece of WWAC's on-air performance. Even with knees knocking, WWAC news hit the ground running.

Of all its locally produced programming, WWAC is probably proudest of its *Atlantic City Tonight* magazine hosted by Calvin Izard and Lynn Wiedner. Izard compares the show favorably in terms of content and production value with magazine shows produced in Philadelphia, "and they do it with a staff of 20 while we've got three



**LEADER**

- \* Studio systems & accoustical design
- \* Installation, construction & turnkey facilities regardless of location
- \* Dependable technology & equipment from world class manufacturers
- \* Talk to us about your specific broadcast problems (Large or Small) or objectives. You'll discover so many good reasons why

**WE ARE THE:**





**LEADER**

**FOR BETTER AUDIO**

Leader Broadcast Systems Inc.  
15707 2nd Place West  
Alderwood Manor, WA. 98036

195 West 7th Avenue  
Vancouver, B.C.  
V5Y 1L8  
(604) 685-6043  
CABLE: Leadertape VCR.

# Perfect Timing Perfect Price

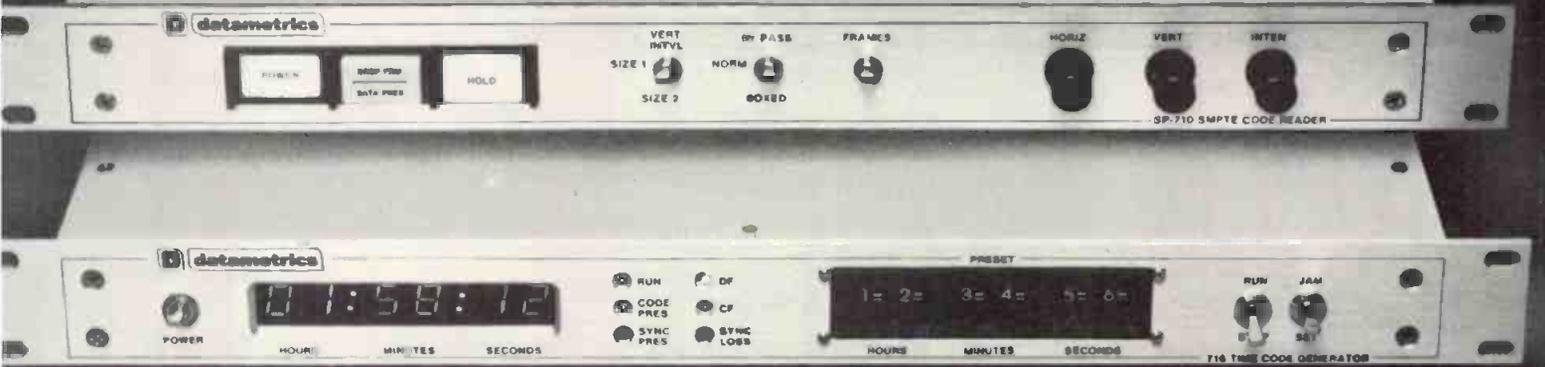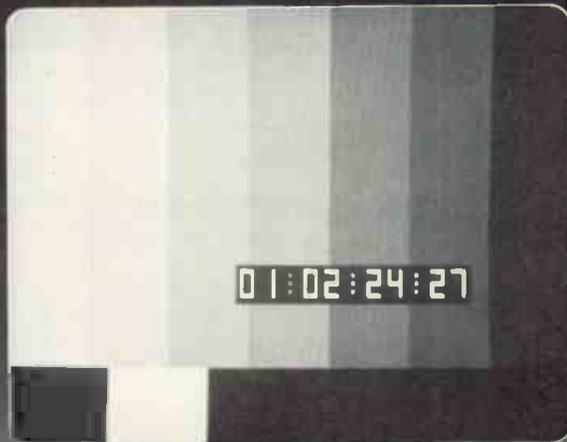

Datametrics, the quality leader in SMPTE Time Code equipment, now offers a low-profile system that meets all your time code needs perfectly ...at a very low-profile price.

The Model 710 SMPTE Time Code Reader is a versatile instrument designed to perform in studio and production environments. Features include wide shuttle speed, frame accurate decoding from 1/20 to 60X normal play speed, a built-in character generator for monitor

display and code burn-in, complete remote control capabilities, plus optional data outputs for computer editing interface.

The Model 716 SMPTE Time Code Generator produces reliable, accurate time code and can be used with the Model 710 Code Reader as a complete time code system. Standard features of the 716 include jam/sync capabilities, frame rates selectable for film or video, and compatibility to the RS-170A color frame standard.

**\$ 1980.\*** Available from stock at \$1980.00 each, these SMPTE

Time Code Units, with built-in Datametrics quality, will give you the perfect time code system...at the perfect price.

For full details, call your Datametrics dealer or contact Datametrics Inc. directly.

**D datametrics®**

Datametrics Inc.  
340 Fordham Road, Wilmington, MA 01887  
Tel. (617) 658-5410/TWX. 710-347-7672

\*Prices in effect through December 31, 1981.

Circle 131 on Reader Service Card

## WWAC: Monopoly On Localism



WWAC's Mobile Unit 1 hustles back from news every day between 4:00 and 4:30 to turn over its HL-79 to the production staff. Within minutes, the unit is fitted into the HL-790 studio conversion kit and is ready to make up part of the station's three-camera compliment for its evening news and news magazine. Only three cameras carry the burden of commercial, news, and local programming

people plus crew."

Of course, Atlantic City has a built-in advantage. Celebrities are not hard to come by, and few small-market stations can offer the parade of headliners that are drawn in by casinos. In addition, the show offers segments on cooking with casino chefs, tips on gaming, sailing, wine, dining, collecting, and a host of other segments all wrapped around South Jersey themes. Director Ben Civenga produces and edits the show with a sense of genuine enthusiasm.

Filling out the rest of the WWAC program schedule is an impressive 300-title film package. *The Muppets*, *Rat Patrol*, *Sea Hunt*, *Dance World USA*, *Soul Train*, *Blue Jean Network* rock and roll specials, *Nashville Scene*, *Good Vibrations*, *Outer Limits*, and *People Are Talking*, the contemporary issues talk show out of Baltimore, Md. But perhaps the station's most popular show is its 5:30 p.m. weekday Gothic soap opera, *Dark Shadows*. In a conversation overheard at the 7-11 store where station personnel go for coffee, a customer asked the cashier where all the kids were who used to hang out on the street after school. "They're all home watchin' *Dark Shadows* on TV," was the reply.

### Lessons for localism

There are still a lot of markets in the U.S. that consider themselves underserved, even when they may have television service in abundance. Whether the market is relatively small or large, people can be given a sense that a television station is theirs, especially if that station reaches out for their comments and involvement. The growth of cable television won't hurt broadcasters who

**PREAMPS** **TURNTABLES** **AMPS** **TONE ARMS** **MIXERS** **EQUALIZER / COUPLERS**

## MONEY IN THE BANK!

When you increase efficiency, cut down time and improve the quality of your broadcast, you put money in the bank. RUSSCO does it and shines with the quick-starting MARK V Vari-Speed turntables, our audio mixers, phono preamps and power and distribution amplifiers. What's NEW is the RUSSCO all metal Tone Arm...Solid, Smooth & Reliable! The NEW 4 channel TEL-A-MOTE Remote Mixer is the sportscaster's small dream machine that ties up perfectly with the NEW T112 Studio Equalizer / Coupler that greatly improves the sound of remotes & talk shows. The NEW MA220 Stereo Monitor Amp gives you separate level & tone controls for each channel. Call Barbara Gaudin for catalog sheets with great specs and Low prices.

You can Rely on **RUSSCO**

RUSSCO ELECTRONICS INC. • 5690 E. Shields Ave., Fresno, Calif. 93727 • Phone (209) 291-5591

pursue news, public affairs, and programming that truly addresses the wants and desires of their local constituencies. If an outlet happens to be a UHF license, cable might even help by putting the station on VHF channel position. WWAC is on cable channel 5.

With possibly hundreds of LPTV licenses coming up for grabs, more and more communities will expect television to serve them and be more than a conduit for large and impersonal corporations headquartered in some distant big city.

Technically, localism will require good equipment — perhaps not the Cadillacs, but also not the Jeeps. As Dan Merlo put it, "You have to be able to do everything. It doesn't mean getting a lot of some stuff, it means getting a little of everything and designing things to be replaced, moved, added to, and compatible with everything else." Asked if he'd choose different equipment than he did, now that he has had some experience with it, Merlo said "no," though he would like more equipment. "The one-inch equipment is great — it needs very little care compared to the quads."

From a staffing standpoint, Bob Bryan points out that localism requires very flexible people who are willing to wear more than one hat, and often more than two. "This is the youngest staff I've ever seen running a television station," said Bryan, "but it's also the most energetic and enthusiastic."

The WWAC staff now includes six people in sales, six in business and traffic, 15 in programming, 23 in engineering, and three in general and administrative roles. Bryan expects to see more personnel growth, given the station's local mission, especially in engineering and pro-


duction. In a recent week, engineering racked up nearly 155 hours of overtime, mostly by two or three key people in switching, transmitting, and maintenance. In the long run, the growth in workload will make it cheaper to hire three more technical people. As mentioned earlier, WWAC is about to initiate a midnight to 8:00 a.m. production shift, primarily for commercials. Of the 86 advertisers that WWAC went on the air with, nearly half required station-produced spots. This trend is continuing, and it takes people. In addition, plans for two more locally produced programs are being discussed. A game show hosted by Bert Parks, a former Miss America host, is a likely project that may very well have syndication possibilities. A very popular horror movie host of the '60s, Zacherly, is negotiating for a comeback with WWAC.

The next major technical innovation for WWAC will be the installation of an earth station. WWAC is betting that more current syndicated product will become available via the bird and that sports and music events transmitted via satellite will be popular with Atlantic City viewers. National and international news cuts are also likely to become accessible to WWAC news, broadening it without obscuring its local focus.

Clearly, the aim of localism at WWAC and at stations that follow similar courses, is not isolationism, but rather consolidation of discretionary authority within a local management that is in tune with Main Street rather than Avenue of the Americas. Group-owned stations, whether network affiliates or independent, can be just as successful at localism, but the answer to the question: "Will it play in Peoria?" has to come from Peoria and not from the other end of the boardroom conference table. **BM/E**

## THE 6403 ACTIVE EDITOR INTERFACE

# ADDS CONTROLLED EFFECTS TO VIDEO EDITS

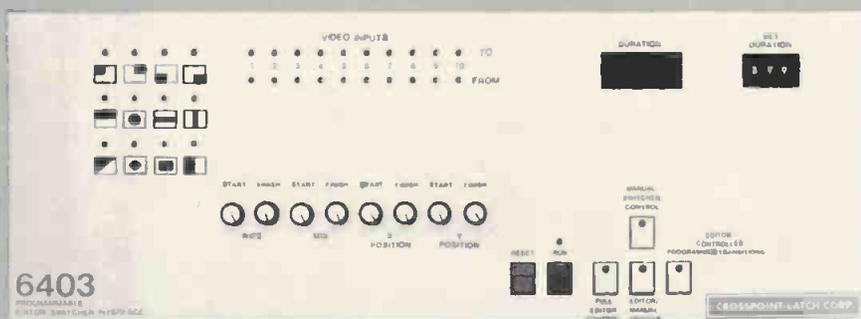

Price \$2750

optional editor module  
\$995

**A horizontal wipe which stops halfway, creating a split-screen:**

**A bordered square insert which opens up from one of the corners and stops at a pre-determined size.**

That is what the 6403 makes possible.

The 6403 is an active editor interface for Crosspoint Latch switchers. It's internal control generators can be triggered from any editor to perform frame accurate effects and mixes (1-1000 frames). It controls the position as well as size of patterns.

The 6403 is flexible. With an optional editor module it can be fully controlled from the editor keyboard, accepting instructions such as pattern size, duration times, etc. Without the module it can still accept trigger pulses from even the simplest editor, and still perform programmed effects.

Ask your dealer for details, or call us directly.


**CROSSPOINT LATCH CORP.**

95 Progress Street, • Union, N.J. 07083 • Tel. (201) 388-1510 • Telex 181160

Circle 133 on Reader Service Card

# THE PROFESSIONAL'S VIDEO TEST SET CHOICE

***MORE STANDARD FEATURES TO BEGIN WITH  
MORE OPTIONS TO GROW WITH***

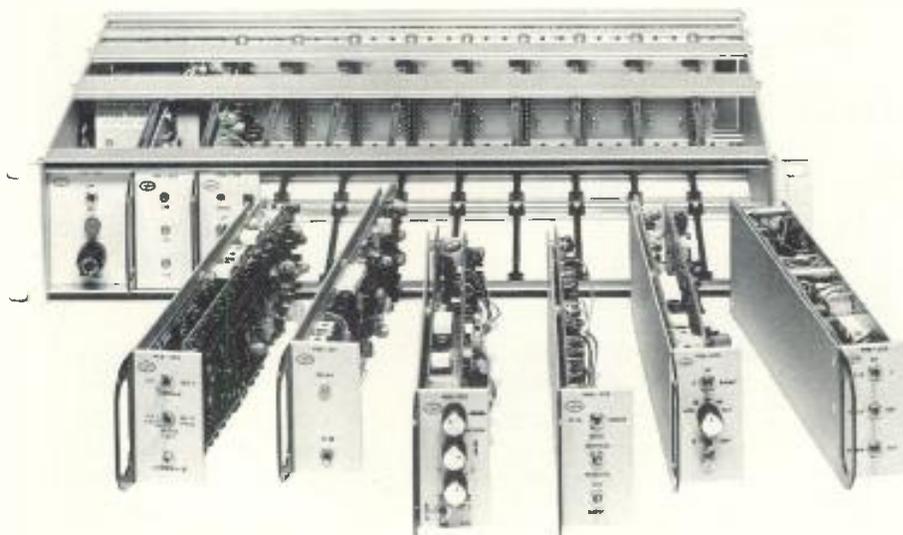

This totally integrated modular video test set is designed for you, the discriminating professional. The Lenco 300 System lets **you** specify video test signals to meet **your** system requirements, rather than the manufacturer's requirements.

For versatility, use the Lenco PSG-310 Digital Color Sync Generator or the PMG-312 RS-170A Generator with any one or a combination of all the test modules. Mix them or match them any way that you can imagine. There are 29 test signals available to answer all of your system test specifications.

**THE AFFORDABLES** — You get a lot more for a lot less with the Lenco 300 System. For example, all of our test signal modules have

composite video delay. This allows you to **individually** time each test signal module to your system. Moreover, we are the first American manufacturer to supply a color bar generator with the SMPTE alignment test signal (reverse bars).

Join the many professionals now using the flexible Lenco 300 test system. We are so sure of your acceptance of Lenco equipment, that we offer a two-year warranty on all parts and labor. This warranty also includes freight to and from our factory.

Call or write for a demonstration today. You will find the Lenco 300 System to be your professional video test set **now** ..... and as you grow.



**LENCO, INC., ELECTRONICS DIVISION**

300 N. Maryland St., Jackson, MO 63755, (314) 243-3147

**The Professional's Choice**

Circle 134 on Reader Service Card

# LOCAL BROADCASTING: LOOKING TO THE FUTURE

**WCVB's Bob Bennett is known for his forward vision and his faith in the future of broadcast television. Here, he airs his views on the impact of localism.**

WITH THE INROADS being made by alternative entertainment and information sources, some think that broadcasting is on its last legs. Others see a new opportunity to expand the role of broadcasting, especially at a local level. What new things can broadcasters do to keep pace with the advances of cable? For one viewpoint, *BM/E* talked to Bob Bennett, president and general manager of WCVB-TV, Boston. While many broadcasters talk about the potential of the medium, Bennett has proved it by his stewardship of WCVB-TV (See *BM/E*, October, 1981, p.35). Here's what Bennett had to say about the future of broadcasting.


**BB:** I look to the future, as a single operator in this market, with more excitement and enthusiasm for the industry than I've ever had in my whole life. A lot of other broadcasters share that with me.

**BM/E:** What's the source of your optimism? So many other people are pessimistic. Is this an entrenchment of, "let's keep that nasty old cable away from our revenue"?

**BB:** One of the advantages of the cable is that it's going to make people view more television rather than less television. I don't know what the hours of viewing are now . . .

**BM/E:** Six-and-a-half hours.

**BB:** Six-and-a-half hours, that's a lot of hours. As of this moment, that includes having a television set in the den someplace. I think as time goes on, that den is going to become a television room, more than it ever was before. Because now you're going to sit there and, depending upon what town you're in, you're going to be able to sit there with a little remote unit and punch up 75 cable stations. It's going to fascinate people. They're going to sit there with more excitement than they did since 1952 when it first started to peak. Those stations that get them-

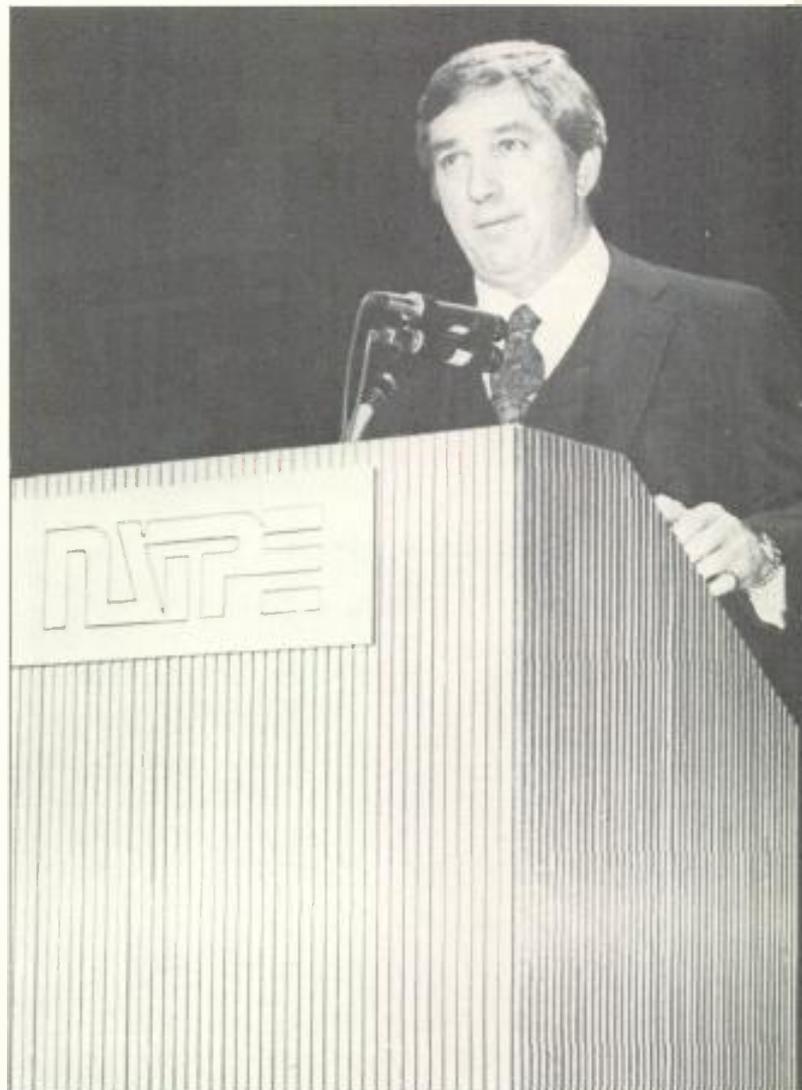

*"What cable does and where the new technology is going should turn people on. That monster is going to have to be fed movies . . . programming"*

## Looking To The Future

*"I see . . . the opportunity to expand news far beyond what it is now. Local stations will be doing two, three hours of news a day"*



selves involved in software are going to be able to feed that monster. They'll have a hell of a lot more going for them than they ever had in the past.

I see in the market an opportunity for us to expand news far beyond what it is now. I think you're going to find the local stations doing two, three hours a day of news rather than a half-hour or an hour. I mean, there are all kinds of opportunities there for anyone who wants to do it. They can be producing programming in their own regional market or they can produce programming in that market for national distribution. There's going to be this crying need for software. And if a station doesn't want to do that, I think all it has to do is to establish further that franchise of a local station in that market.

Those stations that are just running situation comedies and movies in prime time are going to have a difficult time surviving, because that guy sitting there with that button in downtown Boston is going to have at his disposal at 8:00 more than one movie or two movies, as he has now. He may have a choice of seven movies or 10 movies. And in situation comedies, it's going to be stretched with distance signals from 4:00. If a viewer likes *Happy Days*, it will be possible to watch it at 4:00, 4:30, 5:00, 5:30. How is a local guy going to compete in that area? A station will want to establish rather quickly its uniqueness in that market. What can it deliver in that market that can't come in on cable?

And the advantage that the stations have that are doing news and local programming, and public affairs, is that that kind of effort — certainly news — is not going to be done by the cable operator. Cable operators are not geared up to do it.

So I think, if they're going to survive, if they expect to survive and really want to grow, they've got to expand their news and public affairs and local presentations. That doesn't necessarily mean that they have to produce something that's going to be syndicated. They've got to produce it for themselves to make them unique in that market.

I think as you look down the road 10 years, you may find only two or three television stations in this market that are commercial television stations. They could be WNAC, WBZ and ourselves, who could be bigger than we ever dreamt possible. It gets complicated, but I could see those stations being regional stations. Maybe the whole thing changes around, and network relationships

change so that we wind up as a regional network of some kind here. We could be producing for our region, and whatever we produce is also sent out to another region and we take their material back here. I think there's going to be a de-emphasis on entertainment programs. I think you're going to find more *60 Minutes* kind of programming, more *20/20*, more *NBC Magazine* . . . .

**BM/E:** Other people have mentioned that informational programming is what is going to be the salvation of, certainly, local stations and probably the network. That kind of programming can't be duplicated by the cable operator. And if you're going to be doing more and more information in the local station, is that going to be enough to sustain stations? Are you going to be able to bring in enough revenue to keep the stockholders happy?

**BB:** I think you can get more revenue. But you're not going to be able to do that in Portland, Maine. They're not going to have the resources. They're not going to want to spend the kind of money that would be required in the smaller market to do it, so I think they're going to look to the larger markets near them to supply them with that kind of programming. They just couldn't gear up to do a four-hour news operation every day. They may want to, but I don't think it would pay off for them. So I think some of that programming is going to come from Boston. Washington is going to serve sections of Virginia and so on.


**BM/E:** And you become a regional network — the station that serves New England?

**BB:** Yes.

**BM/E:** And all the smaller stations in New England that couldn't afford to do the kind of slick network programming that you do — documentaries, news, dramatic things — could join in that consortium?

**BB:** They could be affiliated in much the same way they're affiliated with networks. They may not be able to compete from say, 4:00 local time to 7:00. What I envision is that those stations in those regions may wind up taking the news operation that we would be feeding out from 4:00 to 8:00, with maybe five minutes or 10 minutes of their own local news included. We would become, not a national source of news, but a regional source of news. And maybe that appeals to me because of the unique region, the way New England is set up. It may not apply to Los Angeles or Detroit or New York — I'd have to think about that for a second. But I know that it would

# EXPECT THE UNEXPECTED

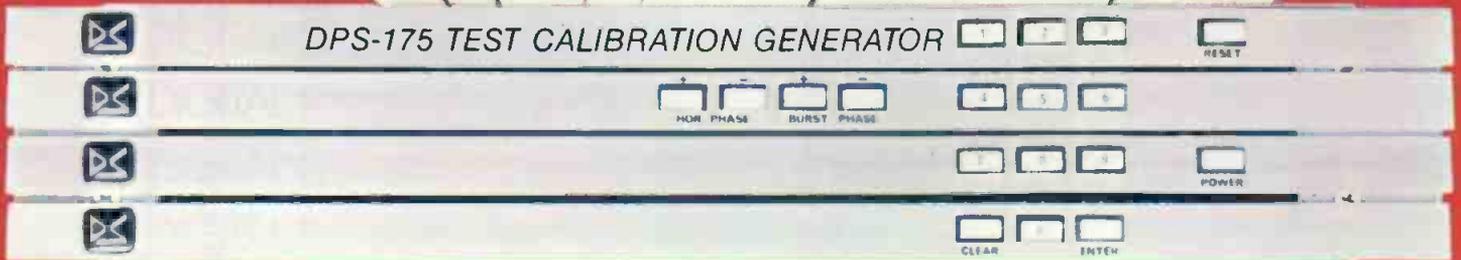

## Digital introduces the DPS-175 Test/Calibration Generator.

Even a first glance at our new DPS-175 tells you it's different. It's part of our digital building block DPS-100 Series and, as such, exemplifies the leading edge of the digital revolution.


But the difference in the DPS-175 is a lot more than skin deep. It delivers the unexpected.

The DPS-175 contains every standardized test signal plus the conventional signals for studio and transmitter systems. It even has the zone plate 3-dimensional Fresnel pattern. The simple 3" x 4" keyboard lets you punch up the specific test signals, by number; allows you to display sequences of test signals; and offers many other control functions. Including the control of novel moving patterns.

And, as if this weren't enough, you can even define your own signals and we will add them as a permanent part of your DPS-175.

Our digital signal generation is in component format. Separate luminance and chrominance signals created by a microprocessor for ultra-precision.

Needless to say, we don't stint on the expected features either. The DPS-175 offers: a digital RS 170A proc amp; digital phasing (to the nearest half degree); automatic genlock when the reference video is present; and much more. From Digital, that's only to be expected.

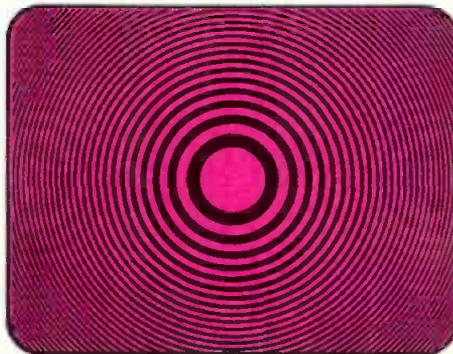

The computer-designed DPS-175 is the new standard against which all test/calibration generators will be judged.

If you would like further information on the new DPS-175, or on any of our DPS-100 Series products, call your dealer. Or get in touch with us directly.



Head Office:  
Digital Video Systems Inc.  
716 Gordon Baker Rd., Toronto, Ont. M2H 3B4  
Tel: 416-499-4826. Telex: 06-966686



Service Center:  
Digital Video Systems Inc.  
869 Delaware Ave., Buffalo, N.Y. 14209  
Tel: 716-885-4234. Telex: 06-966686



# DIGITAL

For additional information call:  
Toll Free (800) 828-7644  
In New York (800) 462-1134


Circle 137 on Reader Service Card

www.americanradiohistory.com

---

## Looking To The Future

---

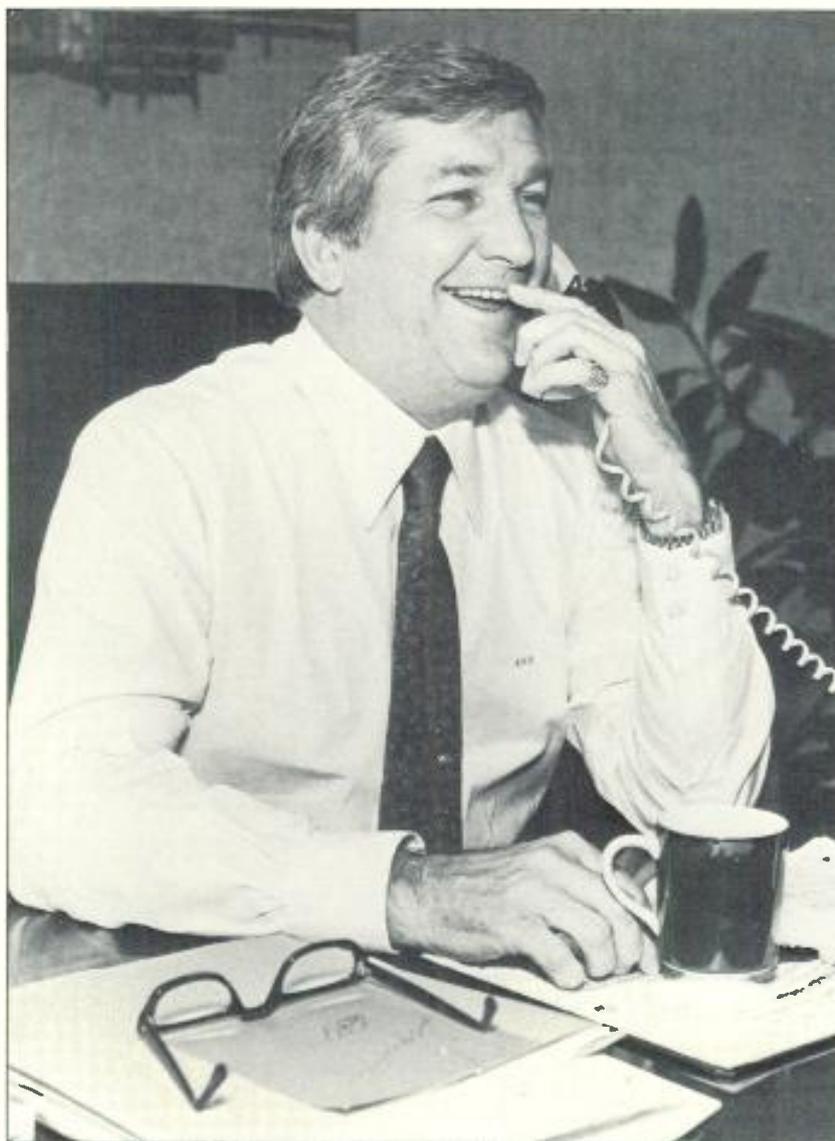

---

*"You try to create an atmosphere for people where . . . there is no fear of failure"*

---

work here and I'm not so sure that it wouldn't work in a lot of other areas. I can see Pittsburgh being a kind of a focal point for that whole section of Pennsylvania. The smaller markets that are currently affiliated with networks could still keep that affiliation, but they might very well be drawn to that regional superstation to be supplied with local news, and maybe local public affairs that may be appealing to a region as opposed to just one market, which is the way they deal with it now.

**BM/E:** Some people thrive in a competitive atmosphere with some diversity. That diversity to some people is a challenge, gives them an opportunity to do some things they've never been able to do and they love the competition. Other people would just as soon not have it. You obviously thrive on that competition. You're not afraid of the other new technologies.

**BB:** No, I'm not afraid at all. And that doesn't mean that I'm right. I could be wrong, but as I told you, I'm enthusiastic as hell about the future. I can bring it down to just this station. I'm not talking about the industry. Here, my feeling was that we could produce situation comedy. Last season we did 20 half-hours of a situation comedy called *Park Street Under*. And while it was not deserving of being on the network, if it was shown to a group of people with 24 other pilots, I guarantee you that very few people, if any, would have ranked it twenty-fifth. What


did we spend on it? About \$15,000 a half-hour. For that same half-hour Hollywood would have spent \$400,000. That excited me. We tried something and proved that we could do it.

We proved to ourselves that a single station can do situation comedy. You might say, well, why didn't we continue on? Well, you're limited. We've got one big studio here and we're doing 62 hours of regular programming. At some point you have to stop and stand back for a minute and see where the hell you are. At the same time we are finishing that, we started to do *Summer Solstice*.

We proved to ourselves again that a station or a company outside Los Angeles could produce a movie. And we did a very good job of it. We were able to attract good people with big names. As it turned out that was the whole reason for it, because we had a writing contest. Our executive producer and producer came out of our plant; they had never made a movie before. When you see it you will find this is a beautiful, sensitive feature. It's going to play on the ABC Network.

You're talking to someone who believes that if you get a group of people together and they're enthusiastic about the project — and *enthusiasm* is the key word — you can do anything. You can lift this building.

They were so excited about what they were doing and

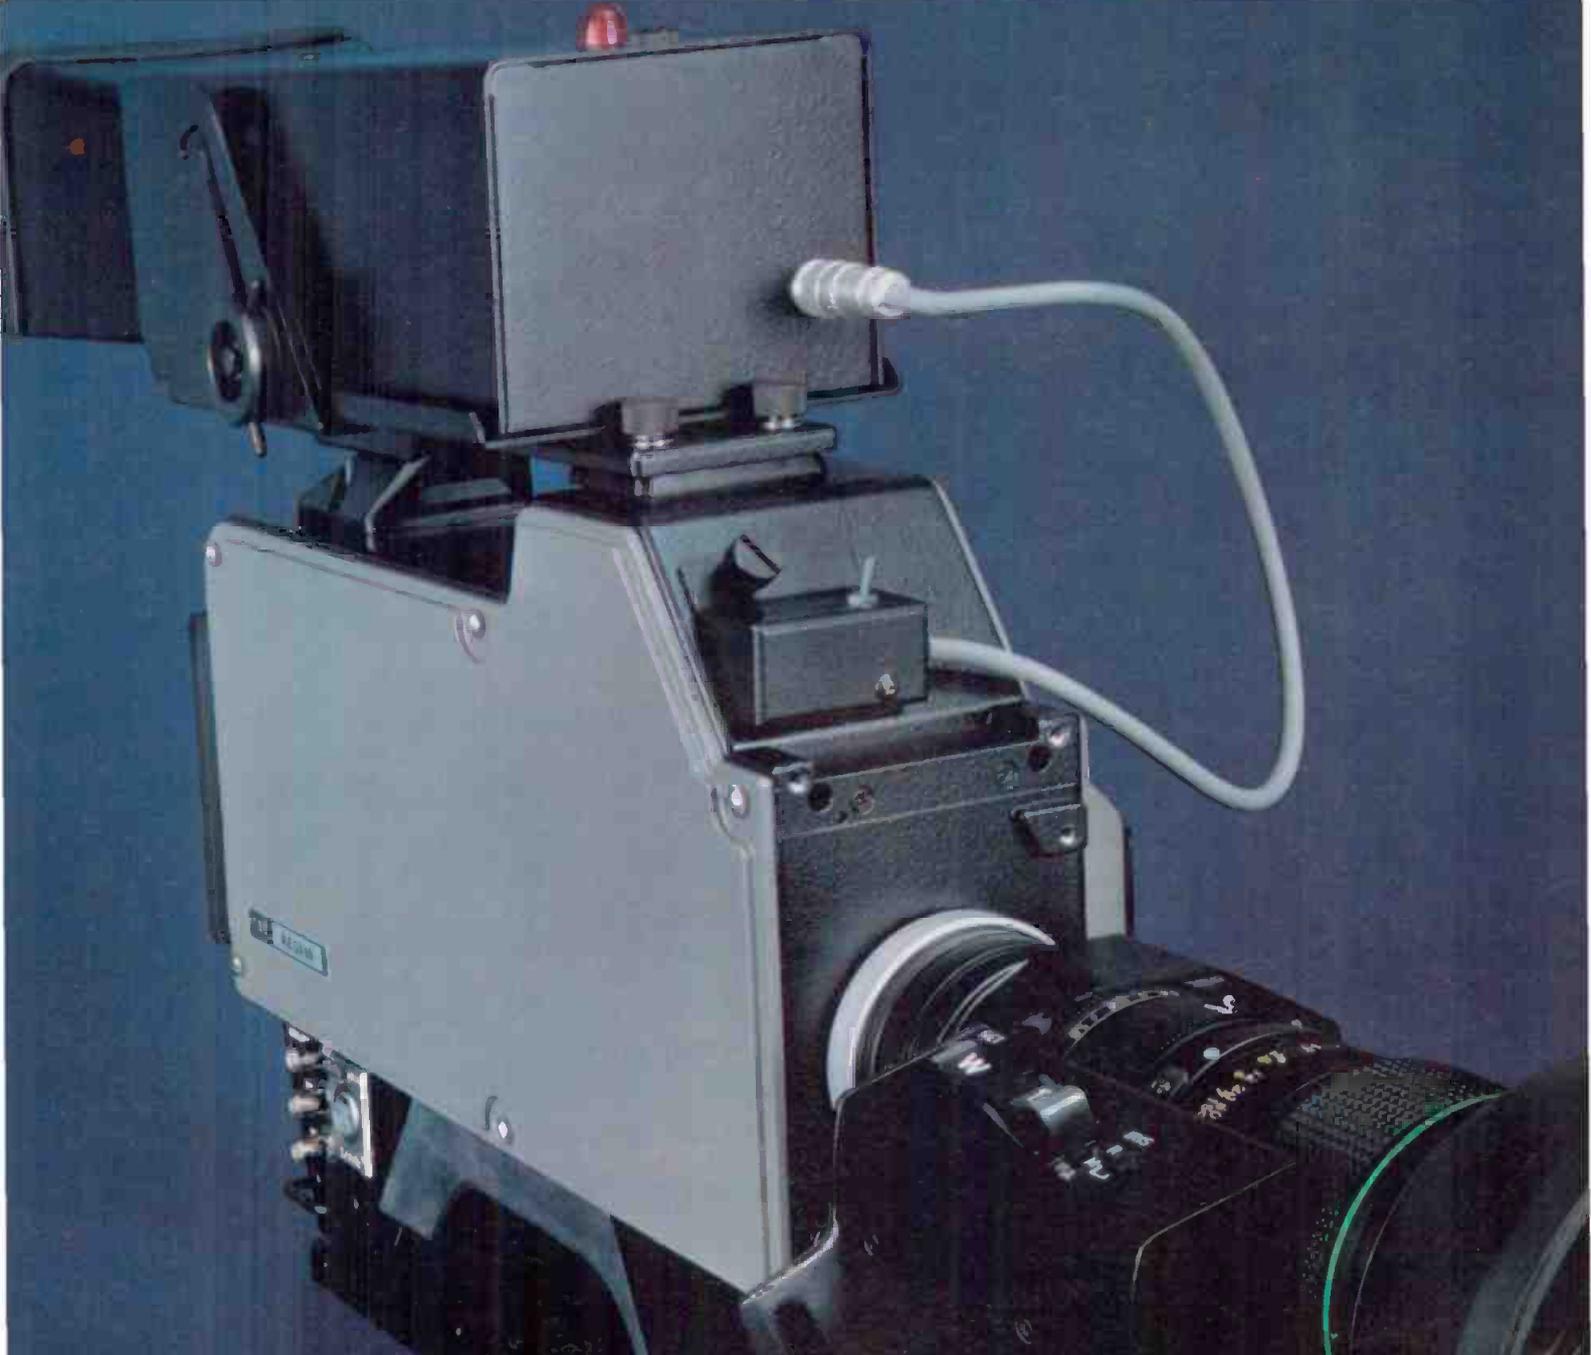

# No excuses

In EFP or ENG, getting the shot is everything.

And, a growing number of networks, major stations and independent producers are consistently getting everything with the Ikegami HL-79. They've become so confident with their HL-79's that the need for a "backup" no longer exists.

The more than 2,000 HL-79's in service today have set new industry standards for low light level performance, well-balanced handling and unprecedented reliability. But Ikegami never rests. Now, the best ENG camera is even better. The improved HL-79D Series features an advanced FET preamp that (depending on your choice of tubes) will deliver a 2 to 3 dB gain in

signal-to-noise ratio. The HL-79D Series is available in four new, application-matched configurations that include high resolution diode-gun or low capacitance diode gun tubes.

In EFP and studio production, the new HL-79D will deliver excellent results. In fact, if you don't have an Ikegami studio camera, chances are that the HL-79D will produce a better picture than whatever camera you've got on the floor.

Contact Ikegami and ask for a side-by-side comparison. Then you'll see why an Ikegami HL-79 crew can leave the excuses—and the backup—at the station.

## Ikegami

Ikegami Electronics (USA) Inc., 37 Brook Avenue, Maywood, NJ 07607: (201) 368-9171  
Northeast: (201) 368-9171  West Coast: (213) 534-0050  Southwest: (713) 445-0100  Southeast: (912) 924-0061  Canada: (201) 368-9179

Circle 138 on Reader Service Card

## Looking To The Future

they wanted it to be so good. And it came through. Henry Fonda, who has been around this business for 50 years, said, "I don't believe what I'm seeing." And what he was seeing was enthusiasm. That's all it was.

So that's where I think it is. There's the WCVB or BBI production capabilities in Boston. And there's two or three units here. And there could be other stations who could be doing it. I see it in New York. I see it in Washington. I see it in Minneapolis. I could see it spreading all over the country.

There are dreamers out there that are going to get it done. I'm just saying that what cable does or where the new technology is going should turn people on — these kind of people who may have been frustrated for years because if you couldn't get it on ABC, CBS, or NBC, you were dead. And if you didn't have the connections or the know-how, you didn't have all the talent and the names that were merchandisable and saleable, you couldn't do it. If you couldn't have big names and a good director, you couldn't get a movie done. That monster is going to have to be fed movies. It's going to have to be fed programming.

**BM/E:** That enthusiasm that you talk about and that I've seen walking around the station the last day and a half is there; it's real. Nobody can make it up. I've heard one phrase over and over since I've been here: "It's fun. I'm having fun." How do you get that translated to other broadcasters?

**BB:** The one thing that does it is what we've done. You

try to create an atmosphere — a working atmosphere for people where they are not afraid, where there is no fear of failure. We did a kid's show, *Jaberwocky*; the first year on the air we did 130 half-hours. It won the award as the best children's show that year, and the international film festival award as the best children's program that year. We put it on at 7:00 in the morning, stripped it. I'll bet you that in the six months that we had it on the air we didn't get as much money in revenue as it cost us to do one half-hour. Now, you might say, hey, that's crazy. Who would do that? But what that established very quickly, and that was just the beginning, was that we really were concerned about serving our constituency.

The payoff comes to the broadcaster who might say, "Why should I do all that, I don't need to do that. I can buy that or the networks will supply it for me, or I don't need to be that involved and I still serve my community." The result of it is that if you do all these things that concern the community, the payoff doesn't necessarily come in those programs from which you make a lot of money, but in the total image. My feeling always is, with the image we have at the advertising agencies in our own community and around the country, if the pricing is the same for our offering as it is with WBZ, WNAC, or anyone else, all things being equal, we'll get a very large share of that sale. Because people know us, they think of us as a class operation, and they want to be associated with that.

Now, many advertisers will not pay a premium for that. But you don't need a premium. All you need to do is let them pay as much for you as they'll pay for anyone else. And in most cases, if that happens, we'll get the lion's share of the order ... that's where the payoff comes. **BM/E**



# The Professionals

**A complete new line of cartridges built to the exacting standards of professional requirements...**

The famous Stanton 881S set a new standard of performance for world professionals and audiophiles alike. Now built to the same careful standards, Stanton introduces three new cartridges—881E, 880S and 880E. The 881E includes the calibrated perfection of the 881S but with an elliptical stylus. The 880S and 880E maintain the same high standards of performance, in applications where calibration is not of prime importance.

The "Professionals" a series of four cartridges featuring all the famous Stanton performance features at different price levels, designed for every budget requirement.

For further information write to Stanton Magnetics Inc., Terminal Drive, Plainview, N.Y. 11803

 **STANTON**  
THE CHOICE OF THE PROFESSIONALS™

## Digital Air Temperature

in Fahrenheit and Celsius



Indoor & Outdoor Sensors  
Walnut Finish Console  
Selector for F° & C°  
Remote to Any Distance  
Slaves Available

Also, a complete line of Weather Instruments, Recorders & Controllers

Department B

Texas Telephone  
Electronics, Inc. (214)  
P. O. Box 7225 631-2490  
Dallas, TX 75209

Circle 136 on Reader Service Card

The world's most widely accepted  
low-power transmitters and translators  
are now available in the U.S.



## Merci, Thomson-CSF.

France has sent many good things to America. Lafayette. The Statue of Liberty. Quiche Lorraine. Now LGT is here too. With a complete range of low-power transmitters and translators. 1 watt to 1 kW. 40 MHz to 900 MHz. With engineering that has taken LGT equipment to 90 countries and more than 9,500 installations. With service on this side of the Atlantic through Thomson-CSF and its Connecticut-based sales and support facility.

LGT. For 25 years, the world's standard in TV technology. Now it's America's too. Merci beaucoup, Thomson-CSF.

For additional information, contact Thomson-CSF Broadcast, Inc., 37 Brownhouse Road, Stamford, CT 06902. (203) 327-7700.

 **THOMSON-CSF BROADCAST, INC.**

Circle 139 on Reader Service Card

If we had set out to give you only  
the features our competition gives you,  
this is where we'd be today.



---

Most VTR units give you only a fraction of the features you might want from a video tape recorder. So we didn't stop where our competition did. We kept on adding features. Until we developed the most versatile 1" machine on the market.

Compare the 3M TT-7000 VTR and NTC-10 Time Base Corrector to the competition. Nobody puts together more of the features you want than 3M. And once you see our unit, we think you'll agree that buying anything else is like getting half a machine.

The 3M TT-7000 Video Tape Recorder gives you:

- Auto track following (ATF) ¼ reverse through 2x forward (optional).
- Video and sync confidence heads.
- Three channel audio confidence heads.
- Video sync channel.
- All DC motor and servo tape transport.
- 19" rack mountable with full dust cover.
- Front panel plug-in modules.
- Frame accurate insert and assemble editing.
- Dual tape timer with zero memory.
- Tape speed override on front panel.
- Stop tone and cue-up (0, 3, 5, 7 sec. preroll).
- Contact closure and TTL external interface.
- Variable speed forward/reverse shuttle.
- Still frame jog.
- Autochroma and color framing.
- Audio 3 record in play mode (built-in speaker).
- Instant stop action from play or slo-mo (with ATF option).
- Instant audio bias level adjust.
- Video level calibrate marker.
- Preset/Manual tracking select on front panel.
- Fixed precision rabbited drum tape guide.
- And low RF, high temperature and low voltage alarms.

Our Time Base Corrector comes complete with its own list of standard features:

- Sixteen line correction window.
- Ten bit quantizing.
- Four times subcarrier sampling.
- 65 dB signal-to-noise ratio.
- Velocity compensation.
- Digital one line drop out compensator.
- Compact size (8¾" high by 17½" deep by 18½" wide).
- 45 pounds total weight.
- Portable cabinet or rack mountable.
- And front panel plug-in modules.

Add it all up, and you've got the most complete VTR/TBC package on the



market. For a free demonstration, call (612) 733-7914 or write 3M/Mincom Division-Video Products, 223-5E 3M Center, St. Paul, MN 55144. In Canada contact 3M Canada, Inc., P.O. Box 5757, London, Ontario, N6A-4T1. In Alaska contact 3M Company, 5331 Minnesota Drive, Anchorage, AK 99502. Get the complete picture.

**3M Hears You ...**

---


Circle 140 on Reader Service Card

# Studio Standards

## Canon 18X Series, Canon 12X Series

Canon broadcast television lenses represent the state-of-the-art, providing an exceptional combination of advanced electronic technology, mechanical durability and optical superiority.

ABC Television has made Canon 12X and 18X Series broadcast lenses standard in practically all of their major studios and production facilities. One reason is outstanding performance: dynamic range, high

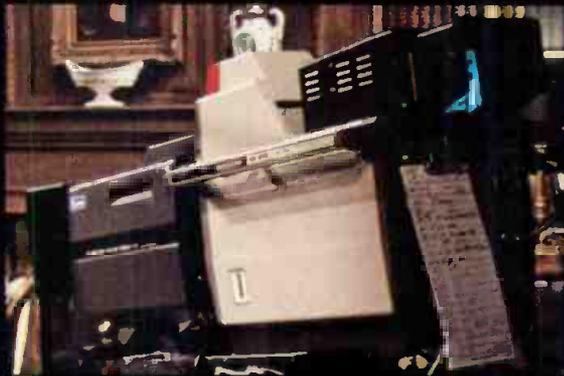

sensitivity and relative aperture, and superior edge-to-edge sharpness. Another is reliability, proven day in and day out on major ABC shows and local and network news.

Tune in any time to see why Canon lenses should be standard in your operation, too. Or call or write for detailed information and full specifications on Canon studio lenses. The standards against which all others should be judged.



# Canon®

Optics Division

Canon U.S.A., Inc., Head Office: One Canon Plaza, Lake Success, N.Y. 11042 (516) 488-6700

Dallas Office: 11311 Stemmens Freeway, Suite 1, Dallas, Texas 75229 (214) 620-2641 Chicago Office: 140 Industrial Drive, Elmhurst, Ill. 60126 (312) 833-3070

West Coast Office: 123 Paularino Avenue East, Costa Mesa, Ca. 92626 (714) 979-6000

Canon Canada, Inc., 3245 American Drive, Mississauga, Ontario L4V1B8, Canada

© 1981 Canon U.S.A., Inc.

Circle 141 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# STARTING A NEWS DEPARTMENT FROM SCRATCH

**Many news directors dream of being able to put together a news operation unencumbered by the “mistakes” of others. KICU, San Jose, Calif., is giving Doug McKnight that chance.**

SAN JOSE, a booming city in the booming Santa Clara, Calif., Valley, is fighting to get out of the shadow of San Francisco. San Jose, now almost the same size as San Francisco, is considered by most outsiders a suburb of its bayside neighbor. The San Francisco stations boom into the market and get a lot of San Jose viewers. Most of the San Francisco stations maintain some sort of presence in San Jose, but the coverage of the city gets short shrift on the newscasts.

KICU, formerly KSGC, decided to change that two years ago. That’s when the station was sold, and the new owners felt that San Jose deserved an identity and a station of its own. Veteran San Francisco broadcaster John Davison was hired to turn the station around. Ch. 36 had the reputation of being a UHF station that showed a lot of old movies and game shows — not the best in the Bay Area. The station did not even have a news department. Davison saw a first-rate news department as an excellent image-builder. Even on the station’s limited budget, Davison found a way to build a respectable-sized news department to serve the needs of the San Jose community.

First, Davison sat down with the technical staff to decide what equipment to buy. There was not enough money to acquire top-of-the-line cameras and recorders, but maintaining quality was still a priority. The staff finally settled on three JVC KY-2000 cameras with Sony BVU-100 recorders. The three editing stations are equipped with Sony BVU-500 recorders and BVE-500 editors.

After the equipment decisions were made, it was time to consider staffing. Davison began an intense nationwide search for a news director. A major stumbling block was the size of the market. San Jose is listed in the San Francisco ADI, which makes it the number five market, but if the two markets were split, San Francisco would drop to about 8 and San Jose, would end up about 25. (The



*News director Doug McKnight (with beard) discusses the 7:30 news with managing editor Ed Casaccia (left) and the on-air team of sportscaster John Shrader, anchors Jan Hutchins and Ysabel Duron, and weathercaster Steve Dini*

## Starting A News Department



Reporter Bill Buckmaster goes over a script with director Alex Case just before the 7:30 newscast

station is suing to do just that.) Because most applicants knew about the real size of the market, the station was concerned that many really good people wouldn't work in that small a market or would demand unrealistic "top 10" salaries.

### Recruiting top-knotch employees

"I was astounded at the caliber of people who were interested in coming here," said Davison. The quality of the applicants gave Davison the leeway to set some parameters on what he wanted in a news director. A major criterion was knowledge of the area — and that's when Doug McKnight came into the picture.

McKnight had spent five years at KGO, the ABC O&O in San Francisco, as executive producer of special projects, and before that was assistant news director at WXYZ in Detroit. He's been both a radio and television reporter,

as well as a producer and executive producer. He also has a masters degree in communications from Michigan State and is finishing up his MBA.

"I heard about the job through the grapevine," explains McKnight, "and I thought it was a news director's dream. I called John Davison and talked to him about the job. The more I talked to him the more impressed I became.

"He knew exactly what he was trying to accomplish and he had no illusions about it," McKnight says. "There was a goal in mind and I felt that it could be accomplished."

Even with a goal in mind, where do you start when putting together a news department from scratch? Lots of questions have to be answered before you can begin. What's the news philosophy? How long a newscast? Single or dual anchor? What kind of set? What kind of reporters? The questions were endless.

"The first thing that I did," explained McKnight, "was to sit down and brainstorm the things that needed to be done. From all my experiences in news departments, what kinds of things did we need to do?


"I made a list of them. Then I went through the list and said, how long do I think it will take to do certain things — like design a set, build a set, hire the various people, order the stationary and office supplies and whatever."

McKnight used a technique that was developed by NASA to make sure that complicated projects are completed on time. It's called a PERT chart, which stands for Program Evaluation Review Technique. With the PERT chart system, you assign completion dates for projects and then construct a chart that tells you when you have to have certain equipment or people in order to complete the project. It then gives you a clear picture of those things that have to be done on time. This information can be put on a calendar so it is easy to see where you are at any point.

"After all this great preparation," explained McKnight with a chuckle, "the calendar went out the window the second week after I made it. But the process allowed me at least to get in my mind all the things that had to be done."

Among the things that made the calendar go out the window were some opportunities that came along before

*The news department shares the ENG microwave unit with the public affairs department, but has three cameras assigned exclusively to news*

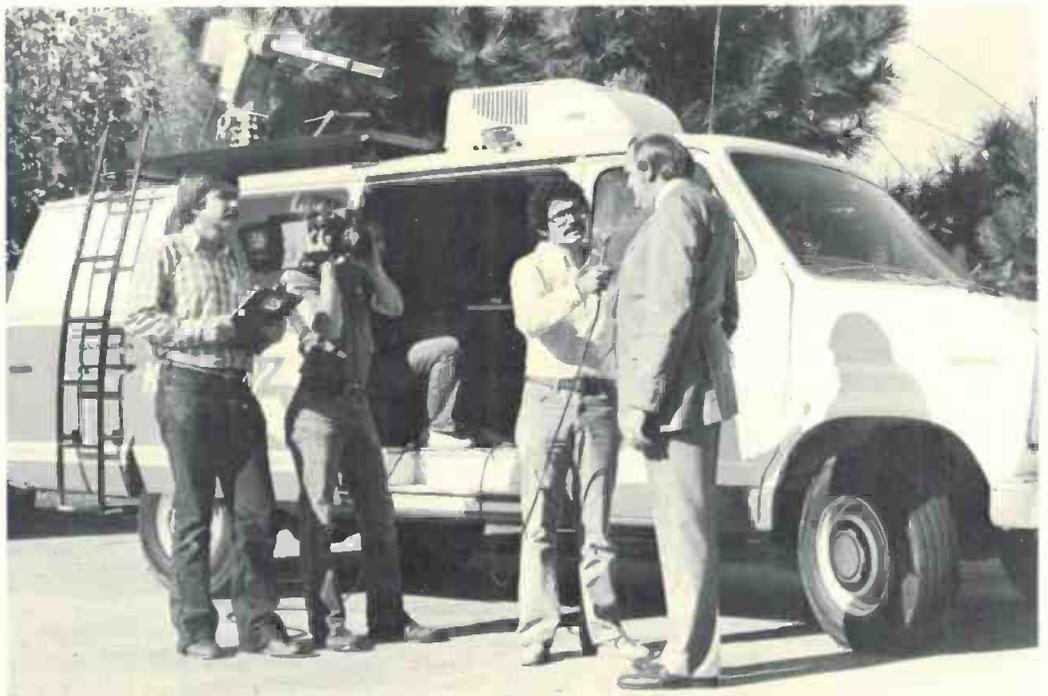

# Vital Industries has instituted a cost-saving manufacturer-financing program - applicable to any Vital equipment purchase.

In accordance with our longterm commitment to more responsive television industry service, equipment purchases are being directly financed by Vital Industries itself at **12% interest**.

Recognizing the barriers raised by prohibitively high interest rates, this financing program is offered well below prime — to permit prompt acquisition, without delay, of the advanced programming and operational systems so essential to productivity and profitability.

This bottom-line economy adds to the special advantage Vital offers TV management: **a complete line of switching, video effects and station automation equipment, available from one single source** — 25 sophisticated system options, totally line compatible. Including production and post-

production mixers and switchers, plus our exclusive digital video manipulation system, the versatile Squeezezoom®. All are state-of-the-art products of Vital's innovative technology; and all are now available with Vital 12% financing.

**This low-interest opportunity** is made possible by Vital Industries' unique financial strengths, solidly established by nearly two decade's stable performance and continuing growth. Now the largest U.S. independently-owned manufacturer of TV switching, effects and distribution systems, Vital can draw on corporate resources available from few other suppliers.

For full program details, contact our Finance Department:

**(800) 874-7875 Toll Free**



## VITAL INDUSTRIES, INC.

3700 N.E. 53rd Street  
Gainesville, Florida 32601, USA

Circle 142 on Reader Service Card

## Starting A News Department



Managing editor Ed Casaccia is considered by McKnight to be the best producer in the Bay Area. McKnight felt it was a coup getting someone of Casaccia's caliber

their scheduled times. The major event was the opportunity to hire an executive producer from KGO named Ed Casaccia. "The chance to hire someone of Ed's caliber is just not something you pass up," says McKnight. Casaccia came on board as managing editor, which in a news department the size of KICU's means he is assistant news director, executive producer, producer of the newscast and "runs the character generator. We all wear a lot of hats around here," says McKnight.

People decisions were the biggest problem facing McKnight. Even without any advertising, he received over 100 tapes from reporters looking to fill the three slots that he had open. McKnight is nothing if not orderly. He made up an evaluation form because, as he put it, "When you deal with that many tapes you tend to forget." As with his PERT chart, his careful planning went mostly by the boards.

The two anchor people were already familiar to McKnight. Ysabel Duron came from San Diego but had spent several years in the San Francisco area. Jan Hutchins had been doing sports at KRON, but had expressed an urge to branch out into a less confining role. Bill Buckmaster was already at the station doing the one-minute news updates. George McManus came from KCBS radio, where he had been a reporter for 12 years. Marti Scholl came from Greensboro, but had spent many years at KGO radio.

An obvious edge in hiring came to those who know the way to San Jose. "It was a two- or three-point plus if you were from the area," McKnight explained. "In every case the people were either from the area or had spent a lengthy time here. They knew Redwood City from Milpitas" (communities on opposite sides of the bay).

The sports director John Shrader, was hired from the other station in the area. The weatherman, Steve Dini, turned out to be a big surprise. He was already at the station, but was the movie host and had never done weather before. Dini, of course, is not a meteorologist, but his weather reporting seems to be effective for the objectives of the newscast. "He's working out very well," says McKnight.

The next problem to be solved was the hour of the newscast. Everyone involved in the decision-making process had a favorite hour. Some wanted to go head-to-head with the San Francisco station at 6:00 p.m. Others held out for 10:00 and some (including McKnight) felt 7:30 was the proper hour. To solve the impasse, the station conducted a telephone survey to gauge the news viewing habits of the community.

"We sampled 432 people, randomly, by telephone," explained McKnight. "We asked a bunch of questions about what they wanted to see in a newscast, but our basic purpose was to pick a time for the newscast.

"We did bracket it a little by eliminating anything before 7:30. We just didn't think at that time that we could compete at 6:00. But we did want to know about 7:30, 8:30, etc. At what time would they start watching a newscast? What was the earliest and what was the latest?"

"We then gave them almost a *TV Guide* kind of choice — 'At 7:30, would you watch reruns of situation comedies, *Evening Magazine*, movies, or a local newscast?' The survey screened for news viewers. We asked people if they had watched a newscast in the last week. If they hadn't, we tossed them out. We were talking strictly about news groups.

"The results were overwhelming. People preferred an early news to a late news in this area. Twenty percent of the people didn't get home in time for the 6:00 news. Given the options at 7:30, people were equally willing to watch a newscast as anything else. At 10:00 we would have been against KTVU in Oakland and we would have gotten killed. Three percent would have watched us against the 30 percent that would have watched them."

On balance, though, it should be pointed out that eliminating non-news viewers skewed the survey and the KTVU comparison was based on a known quantity against a news broadcast that didn't even exist yet. Also, a 7:30 newscast has been successful counter-programming in several other markets.

McKnight now has a news team, a set, equipment, and an airtime, but what goes into the newscast? The main thrust of the newscast is its San Jose perspective. McKnight prefers it to be called a South Bay perspective because the ADI includes more than San Jose.

"We cover stories in San Francisco, but we approach them much the same way that the San Francisco stations approach stories in San Jose. If you watch our newscast you will see that it is heavily South Bay oriented," says McKnight. He adds that another selling point "is that we do a straightforward newscast. It's not a lot of hokum. I think people are getting tired of that stuff."

Doug McKnight is not getting tired. He thinks that San Jose is a good news town, which is the highest compliment a newsman can award a city. He is tired of living in the shadow of San Francisco. He is out to prove that he can put on a newscast and do it better than anyone else. And unlike almost all the news directors in this country, he is getting a chance to prove it without anyone else's imprint on how he does it. Doug McKnight is unique in that when the dust settles, succeed or fail, he can at least say that he did it his way. **BM/E**

---

*Editor's note: When this was written, the KICU news had been on the air for less than a month. We plan to take another look in the future to see how the station is progressing.*

# Look into a JVC 3/4" TapeHandler. Now.



JVC has taken a close look at 3/4" Video Cassette Recording with an eye for what you've been looking for. Stability. Reliability. Gentle tape handling. Economy. The result is a full line of recorder/editors, full-function recorders, cost-efficient players, and microprocessor-based remote control units with utmost versatility, broad interfacing capability.

Take a look inside one of JVC's Tape-Handlers...the CR-8200U Recorder/Editor, the CR-6600U full-function Recorder with assemble-editing capability, or the CP-5500U Player with on-air quality...and you'll be amazed at what you don't see.

No pulleys. No belts. No idlers.

Instead, a 7-motor direct drive system that keeps tape tension constant for smooth and reliable tape transport, reliable tape shuttling. A simplified tape threading mechanism for gentle tape handling. Brushless DC motors that directly drive the capstan, head drum, and reels to give stability and reliability.

To go with them, there's a choice of compact control units: the easy-to-operate RM-88U Editing Controller for precise timing of machine functions, the low-cost RM-82U Editing Controller, and the RM-70U

US JVC Corp. Dept. BME-11/81  
41 Slater Drive, Elmwood Park, NJ 07407

- Please have a representative call.  
 I don't want to talk yet. Just send literature.

Name \_\_\_\_\_  
Title \_\_\_\_\_  
Company \_\_\_\_\_  
City \_\_\_\_\_  
State \_\_\_\_\_ Zip \_\_\_\_\_  
Phone \_\_\_\_\_

full remote control unit with shuttle search function.

Get all the details. Send in the coupon, phone toll-free 800-821-7700, Ext. 7005 (In Missouri: 800-892-7655, Ext. 7005).

**Your choice.  
Now. JVC®**  
US JVC CORP.



© 1980 US JVC Corp.


Circle 143 on Reader Service Card

www.americanradiohistory.com


Our family album is filled  
with beautiful pictures.




*TTV 1525  
Top of the line studio camera.*

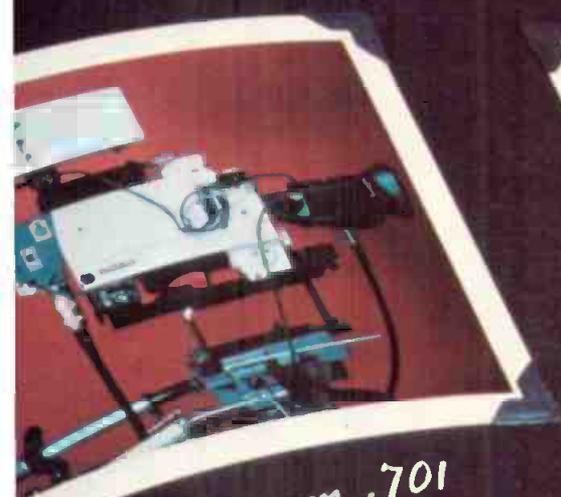


*Microcam 701  
Three cameras in one: EFP,  
ENG and studio operation.*

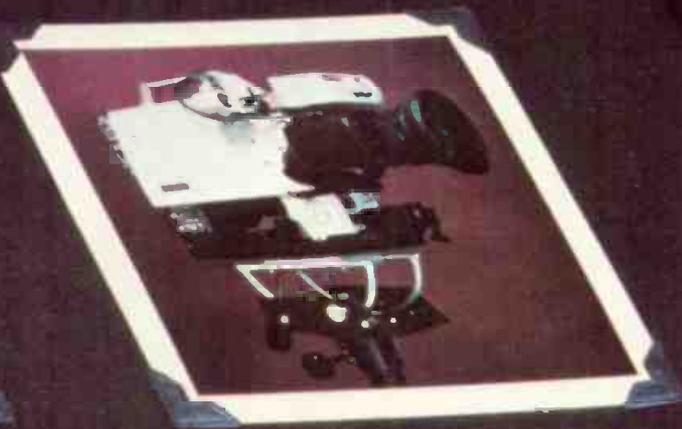

*Microcam 601 A  
The low-noise version of  
the successful MC 601.*

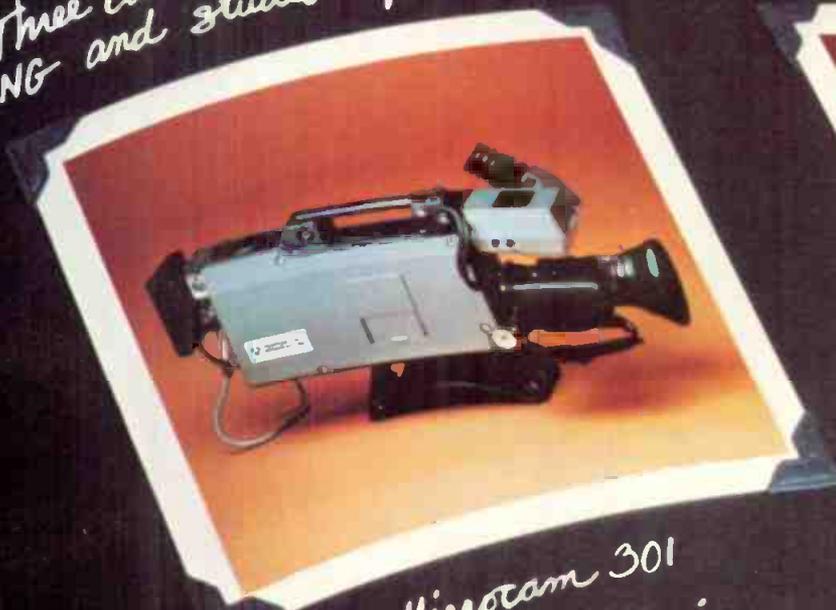

*Microcam 301  
The ultimate in  
ENG economy.*

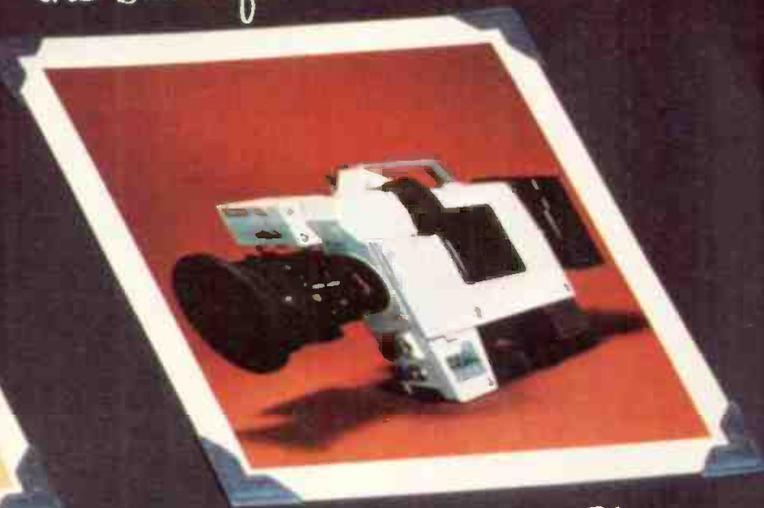

*Microcam 501  
A versatile, affordable  
mid-size ENG camera.*

Thomson-CSF Broadcast, Inc. has always offered a wide range of color cameras. Now, with the addition of the TTV 1525, our line stretches even further. All the way from an eleven-pound ENG to a full-size, high-quality camera for the studio.

Now more than ever, there's a Thomson-CSF camera for every need,

every location, every budget. And Thomson-CSF quality down the line. For more information, contact Thomson-CSF Broadcast, Inc., 37 Brownhouse Road, Stamford, CT 06902. (203) 327-7700. West Coast Sales & Service, 1919 West Magnolia Boulevard, Burbank, CA 91056. (213) 849-2188.

 **THOMSON-CSF BROADCAST, INC.**

Circle 144 on Reader Service Card

# **BROADEN YOUR RADIO PROGRAMMING HORIZONS WITH A NEW SPECTRUM OF SERVICES**

Open your doors to world news, stereo and special events and be a superstation in your own market with the leader in satellite-delivered radio programming.

The California Microwave Small Aperture Terminal (SAT) delivers a new spectrum of program diversity and quality right to local studios, no matter where. And that means delivering audience, economically with impressive flexibility at surprisingly low cost.

- Greater than 70 dB audio dynamic range
- Impeccable stereo delivery nationwide
- Cue, automation, hard copy, and wire service data channels
- Multiple channels per carrier (MCPC) for regional sports
- Excellent reception in fringe areas

Be number one with the SAT that's number one. Available now.



**CALIFORNIA  
MICROWAVE**

**CALIFORNIA MICROWAVE, INC.**  
990 Almaden Ave. Sunnyvale, CA 94086  
(408) 732-4000 TWX 950 338-9231  
Call Jim Smith, SA-1163

For immediate interest circle 145 on Reader Service Card

For information only circle 146 on Reader Service Card

# THE BIGGEST SATELLITE NET BECOMES A SUPPORTER OF RADIO LOCALISM

***The Mutual Broadcasting System now has the largest satellite network in operation, with its own uplink and, soon, about 650 earth terminals to deliver expanded, diversified programming to about 900 affiliates. Despite centrally produced programming, Mutual turns out to be a supporter of local radio.***

ARE THE SATELLITE NETS that are swarming onto the scene going to "nationalize" radio, to spiral to a new era of domination of radio by national networks? Will the ease and low cost of satellite distribution, with its high technical quality, put an end to the reign of the local radio program director?

If there is an inherent incompatibility between the satellite nets and radio localism, it is beginning to come into play right now. New program developers have been cropping up regularly, each one pointing out how easy to get, how inexpensive, how professional in content and style the programming is going to be. In addition to the newcomers, the traditional nets — NBC, CBS, and ABC — are transmuting themselves into "new" nets, adopting satellite distribution and creating new kinds of programming.

A good insight into the meaning of the full-blown satellite net to the future of radio programming can be found at the Mutual Broadcasting System, headquartered just outside Washington, D.C. Mutual is now a full satellite operation on a massive scale, with a company designed and owned uplink and about 650 earth terminals, all supplied to affiliate radio stations. Mutual has some basis for its claim to being the first commercial network to own the entire distribution system. Mutual's bold policy of supplying earth stations at no cost to the users set a pattern that many satellite developers have followed.

The speed at which Mutual's affiliates have been equipped for satellite reception could hardly have been foreseen a few years ago. Before Mutual's plan was announced, conventional wisdom held that downlink capability would come in gradually as the better capitalized radio managements decided to indulge in this "luxury." Similarly, it was thought, the programmers would get

onto the satellites slowly — the broadcast establishment surely would not move for a long time.

Mutual's demonstration of do-it-all-now had a lot to do with the avalanche pace of the satellite revolution. Mutual was aided and abetted by California Microwave's manufacture of 50 to 75 earth terminals a month and installation of them in radio stations in every part of the United States. Software producers planning to distribute by satellite no longer fret about how many potential subscribers have earth terminals; if a radio management wants to sign up for the programs, the earth terminal follows almost incidentally.

## **Total design for feeding the satellite**

The Mutual plant consists of studios in Arlington, Va., and a brand-new uplink facility about 10 miles away in Bren Mar, Va. At the present time Mutual has three program channels in active use, with more to come. The uplink signal with the three channels goes to Westar 1, on which Mutual uses transponder 2 in a single-channel-per-carrier mode.

The studios, (*BM/E* March, 1977), include several "on-air" studios for voice material and a large news editing room with adjoining rooms for producing recorded newscasts and commentary programs. Dedicated telco lines to important news spots in Washington provide for the live coverage of political news and "actuality" interviews with newsmakers that have been Mutual specialties for many years.

A variety of pathways bring in reports from Mutual news personnel across the country and abroad. For sports remotes, another Mutual specialty, there is a large complement of portable input equipment, with a number of advanced techniques developed by Mutual for its play-by-play coverage of sports events. The sports coverage is being expanded with the availability of three channels at all times so that Mutual can, for example, put on regional sports programs.

Complex switching operations get the many programming elements and the commercial blocks onto the right channel at the right time, complicated by the necessity for taking account of time zones in program scheduling. The daily switching is carried out by a two-layer computer operation. The first computer is fed a skeleton schedule for each day, and then gets commercial sales information and a precise program format for that day. This information is merged by the computer into a specific daily pro-

## Biggest Sat Net Supports Localism

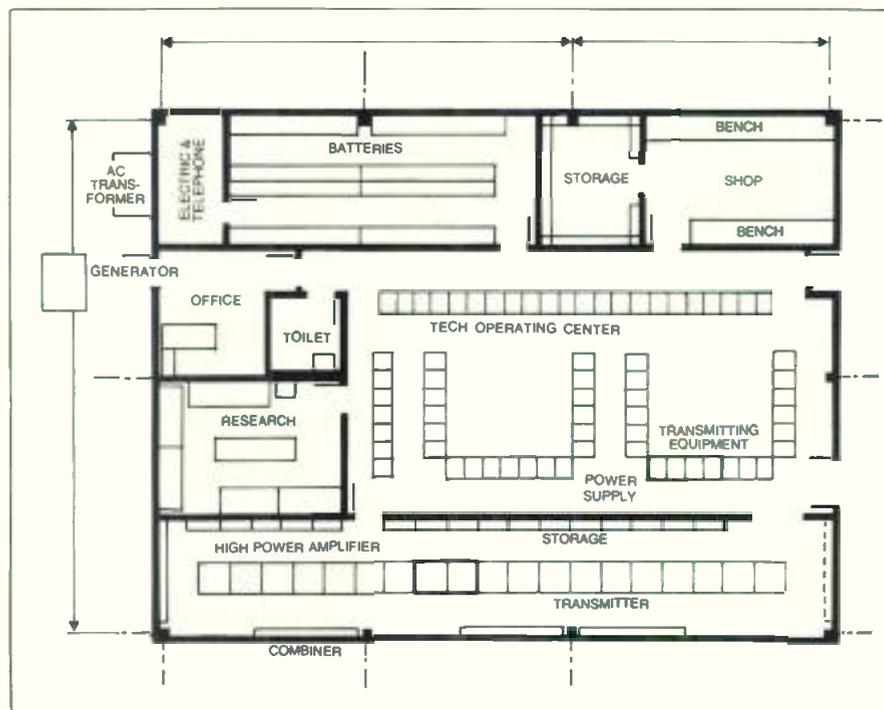


Diagram shows floor plan layout at Mutual's new building designed specifically for uplink capability

gram with all elements, channels, and times stated. A floppy disk holding the whole day's schedule goes into the second computer, which then directs the actual switching.

A complete manual switching console serves as back up for this computer operation.

At the present time, the central switching does not direct particular programs to particular stations. Each affiliate management chooses which programs on the Mutual smorgasbord it will pick up. Technically, the choice is made by tuning the downlink demodulator to the right channel. Presently most stations can stay tuned to the same channel most of the time but Mutual expects that as the channel capacity and program mix expand, centralized switching may become desirable. If that is instituted, the central switching computer would tune each station's demodulator to the needed channel at each hour of the day. (National Public Radio is already using a similar system.)

### Bren Mar's extraordinary uplink

The new uplink, which went on line this last June, is in a new building specifically designed for the job. The programs come in from the studio on three dedicated 15kHz telephone lines; a complete microwave link between studio and uplink is ready at all times to take over if any telco line is not up to snuff.

Redundancy, in fact, is the rule throughout the plant. The six modulators (anticipating expansion in number of channels) are backed up by six more modulators. Any modulator can be switched to any audio input, which gives flexibility in channel assignments as well as a virtual guarantee of continuity in this part of the operation. The modulators put the audio signals onto the subcarriers that will take them through the system.

Each subcarrier has on it not only the 15 kHz audio signal but also a series of cue tones in a 16 kHz to 19 kHz band. The cue tones are on hand for a number of purposes, and are useful for radio station operators who want to automate their own switching to some degree.

The three subcarriers in use at any time go into a combiner and onto a 70 MHz IF frequency. This composite signal, with its frequency-division multiplex carriage of the three program channels, goes to the high power amplifier (HPA) where it is upconverted to 6 GHz and raised in power to the transmission level.


From the HPA, the 6 GHz signal travels in underground waveguide to the 11-meter antenna just outside the building. There are two HPAs, each rated at 3 kW at present; only about 10W is used ordinarily. The large power reserve looks toward future expansion of program carriage by the uplink. One HPA acts as a hot standby for the other.

The 4 GHz signal bringing the programs down from the satellite is received directly at the uplink station on the 36-foot antenna, and also on a six-foot antenna, for monitoring purposes. The six-foot antenna and typical downlink electronics provide a signal much like the one most affiliates will get. This essential signal allows an automatic signal strength adjustment system, a kind of high precision ATS, to keep the output of the HPA at the



Operating center at Bren Mar uplink station. In foreground are controls and readout of computer that tracks all parts of the operation

# PERFORMERS CAN AFFORD TO BE TEMPERAMENTAL.

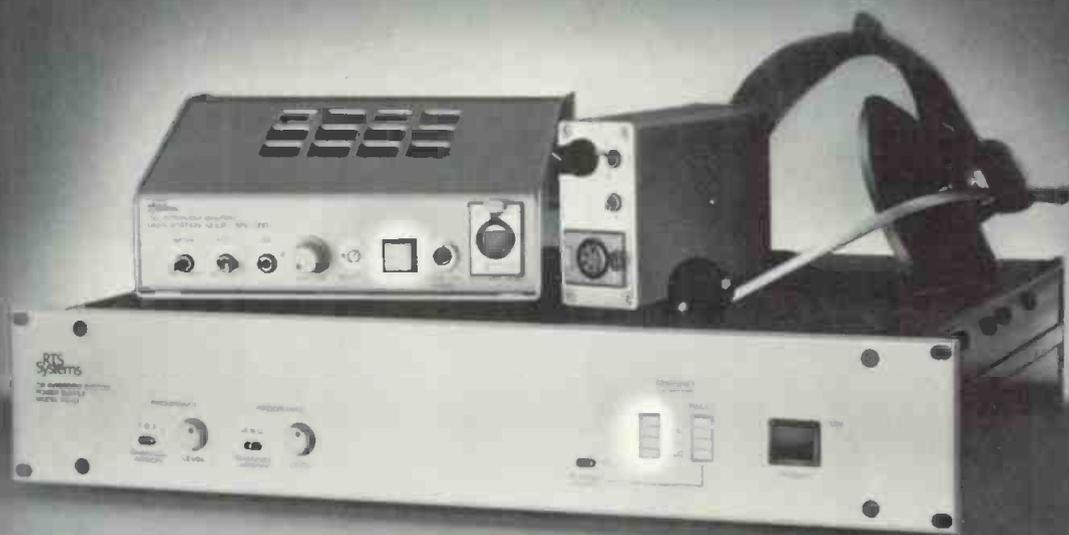

## Your Communications System Can't.

When an entertainer has an off day, that's a problem. When your communications system decides to take the day off, that's a disaster.

The TW Intercom System from RTS is preferred by experts because it meets the constant demand for utmost reliability. Professionals value its performance and versatility. Its unique design provides clean, effective communication with no loading or audio degradation — even with 75 stations on line.

To find out why RTS Intercom Systems are fast becoming the industry standard, call today.

### Additional Product Lines




**SERIES 400 PRO-AUDIO**  
High performance  
amplifiers



**SERIES 1000 MATRIX SYSTEM**  
Dedicated-line matrix  
intercom/squawk system



**MODEL 801 MASTER STATION**  
Multi-channel  
communications center

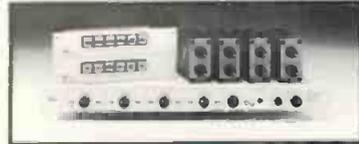

**SERIES 4000 IFB SYSTEM**  
Self-contained  
program interrupt system

**RTS**  
Systems  
INC

1100 WEST CHESTNUT STREET, BURBANK, CALIFORNIA 91506 213/843-7022 TELEX: 194855 TWX: 910-498-4987 A SUBSIDIARY OF COMPACT VIDEO SYSTEMS INC.

Circle 147 on Reader Service Card

## Biggest Sat Net Supports Localism



William Check, director of satellite engineering, demonstrates the modulator assignment control in the uplink electronics. Just below it is the spectrum analyzer that monitors output power

right level for proper operation.

If the power level is too high, it will tend to "take over" in the satellite, cutting down on the power available for other signals being handled. If the HPA output is too low, the signal reaching the radio stations will not be strong enough to operate the downlink electronics properly. Foul weather, especially a severe thunderstorm near the uplink, can reduce the power reaching the satellite substantially.


Another interesting function of the system is to keep the antenna pointed toward the satellite within about a tenth of a degree. If the antenna is misdirected, the signal will miss the satellite and go off into space. The downlink signal gives information on this and the system automatically operates the direction motors on the antenna to correct its position.

The monitoring system uses a Tektronix programmable spectrum analyzer that has the upper and lower tolerance limits for the downlink signal in its memory. An out-of-tolerance signal automatically triggers an adjustment.

### Top audio for all programs

Mutual decided to incorporate top audio quality throughout the plant, in both the studios and the uplink station, even though a majority of programs are voice only. The uplink is equipped with distribution amplifiers from McCurdy, modulators from Leaming Industries,

*Bank of modulators that put audio signals onto subcarriers for carriage through the uplink system. Each modulator is set to a specific subcarrier. Any signal can be assigned to any modulator*

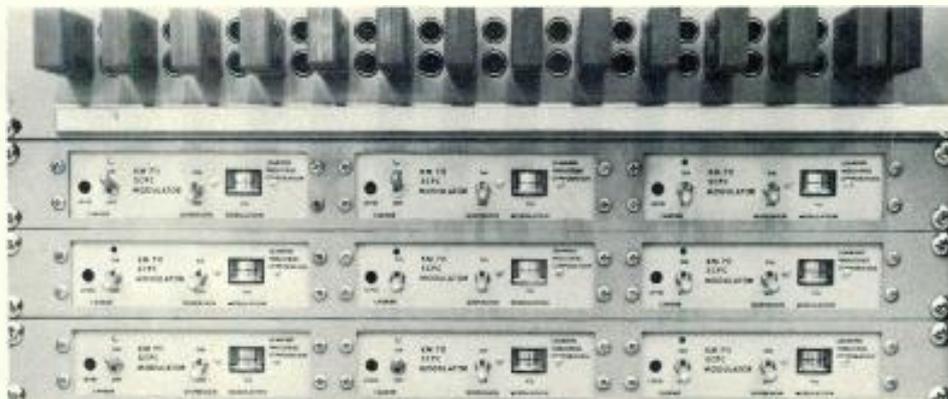

combiners and upconverters from California Microwave, HPAs from Aydin, and an antenna from Scientific-Atlanta. Martin Rubinstein, president, explains: "We decided to use the full 15 kHz bandwidth and very low distortion operation on all programming because we knew that, right away, our signal quality must be up to the best local FM broadcasting to make us competitive. Moreover, as we increase our coverage of music, including live concerts, top audio quality will be even more important."

The uplink-downlink chain includes a compandor system to improve the signal-to-noise ratio. This approach to noise control has become quite general in satellite systems (see story on the Bonneville satellite system on p. 81 in this issue).

### Supply power has double redundancy

The uplink supply power is made virtually failure-proof with a double backup system. A complement of massive storage batteries, totalling 120 kW, floats on the supply power line at all times and is kept charged by the line power. Thus, the batteries instantly take over if commercial power falters and can run the plant unaided for about eight hours. For a longer outage, a diesel generator can be brought on line in seconds and will run the plant for about 100 hours without refueling, including recharging the batteries.

A separate room in the downlink for the batteries is designed in a way that typifies the care that went into the plant. This room is lined with concrete that separates it from the rest of the building, and has a floor several inches below the floor level elsewhere, so that a battery fluid spill cannot seep into other parts of the plant.

The site, in a valley a little below surrounding terrain, gives the essential protection necessary for frequency clearance amid the maze of microwave signals that criss-cross the area. The design has ample physical and technical space for expansion, with room in the backyard for a number of additional uplink antennas and room in the building for much more electronics. Mutual is considering renting space in the uplink facility to other organizations. Mutual's own expansion to additional program capacity will, of course, be easily accommodated. Thus Mutual is well set to move into the satellite era on any scale the management wants. The plant will support — indeed, encourage — any degree of program expansion and diversification that Mutual finds desirable.

### Programming: aimed at localism

Is the growing program diversification and expansion pointed toward the eventual Mutual takeover of the main program space at the local station? Radio operators who imagine that signing on with Mutual will, in time, let them

## FROM BACH TO SWING




### The Compact 22. Priced to strike out the competition.

This versatile 22-foot mobile unit is in a league by itself. With four cameras and three VTRs, it offers big production capability at a price that earns rave reviews.

The Compact 22 breaks the record for minimum turn-around time. It's precision engineered to cut down equipment set-up time so you can go from one location to another quickly.

For more details about how you can score a smash hit on the road... Call us today.

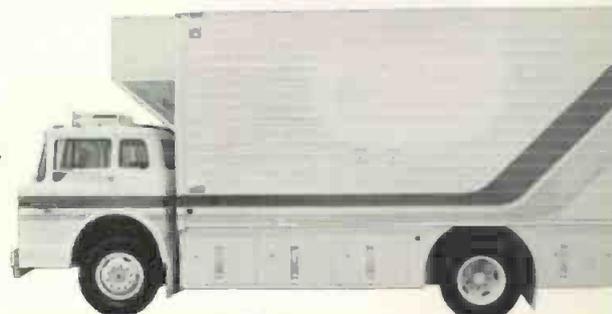

**Compact Video Sales** 

LOS ANGELES: (213) 843-3232 / NEW YORK: (212) 265-6203 / DALLAS: (214) 783-0044 / CHICAGO: (312) 369-0714  
WEST COAST HEADQUARTERS: 1104 WEST CHESTNUT STREET, BURBANK, CALIFORNIA 91506 TELEX: 19-4855 TWX: 910-498-4987

Circle 148 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Biggest Sat Net Supports Localism

go home for most of every week had better listen to Martin Rubinstein. He says: "We must have — and I venture to say all nationally organized program producers in the end must have — subscribers who each have an individual program character and well-planned, enterprising, community-attuned local operation. That is the real prescription for radio health today, and even more in the future. For such vigorous localists we are going to have more and more non-local material, attractive programming they need and could not produce themselves. But we can never run their stations for them."

Mutual's long-standing stocks-in-trade, national and international news and play-by-play sports, are becoming even more substantial in the mix. Multiple channels are allowing Mutual to regionalize the sports coverage on an increasingly large scale.

The mix also includes an increasing number of serious commentary programs, discussions, and interviews with authorities on political and consumer topics. A business

comment program, originated by *Forbes* magazine and produced by Radio Works, the Los Angeles syndicator, is available five times a week. Mutual has moved strongly, with great success, into entertainment programs in the form of music specials.

The program list during one week in August provides a taste of the mix. In addition to the backbone newscasts and sports coverage, there was an interview with Virginia Knauer, director of the U.S. Office of Consumer Affairs, who gave advice to consumers on meeting the problems of inflation. The Mutual Spanish-language football broadcasts, carried by many stations in the Southwest, celebrated their fourth anniversary with coverage of a game between the Cowboys and the Green Bay Packers in the Texas Stadium. *Assignment Hollywood*, a daily series of interviews with film stars hosted by Fred Robbins, featured Kate Nelligan, Christopher Reeve, Nastassia Kinski, Burt Lancaster, Roger Moore, and Pele, among others. Elmer Dapron's daily *Grocery List* told what foods were best buys and how to stretch the grocery money. *On the Homefront* offered daily advice on home maintenance and equipment buying.

Every weekday night the midnight to 5:30 a.m. Larry King show brings a great variety of celebrities and newsmakers into the Mutual studios for interviews and discussions. This immensely popular talk show draws as many as four million listeners in an evening.

On the entertainment front, Mutual produced the weekly three-hour music special, *The Dick Clark National Music Survey*, a rundown of top popular music releases peppered with interviews with singers, songwriters, and instrumentalists. Clark, long-time impresario of popular music with his *American Bandstand*, is also immensely popular with Mutual's affiliates; many sell local time on the Clark program at premium prices.

Rubinstein reveals that Mutual plans to move into music of a wide variety in 1982 including both recorded and live music programs and eventually live concerts in stereo.


### What do the users say?

From a list of several hundred Mutual affiliates that had their earth terminals by June of this year, *BM/E* called six at random, including small, medium, and big markets and several formats. Telephone interviews produced a consistent picture of the experience of a Mutual affiliate with satellite delivery.


KPAG, Pagosa Springs, Colo., is the only station in this small town in mountainous ranch and ski country. The operation has been built successfully around "top pop" and "top country" music coverage, plus a number of farmer-directed programs, Spanish-language broadcasts of several kinds, community discussion programs, and local news.

From its Mutual earth terminal KPAG pulls in the top-of-the-hour news, a large proportion of the discussion, political, and self-help programs (very popular with the audience), the Dick Clark music specials, and the overnight Larry King show, among others. Deborah Steele, acting program director, reports that the local programming establishes the station as the voice of the community, while the Mutual programs give the station a nationalism and sophistication that the affluent ranch and sports audience welcomes.

In Palm Beach, Fla, WPBR is successful with an all-talk, heavy-news format. The station has developed

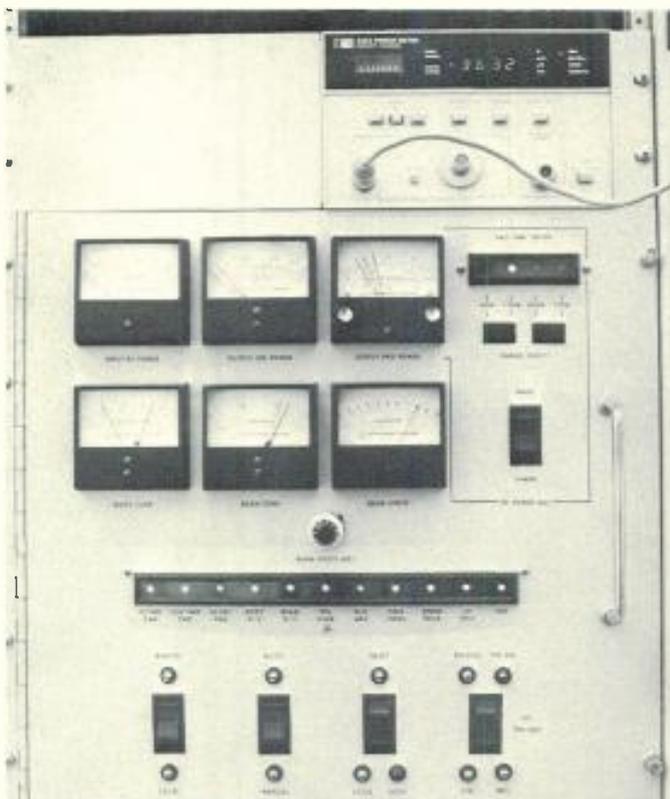

Meters show continuous readings of power, voltage, current in various parts of transmit operation, including the emitted beam itself. LED's below meters signal faults in specific areas — high and low power supply, door interlock, and so on

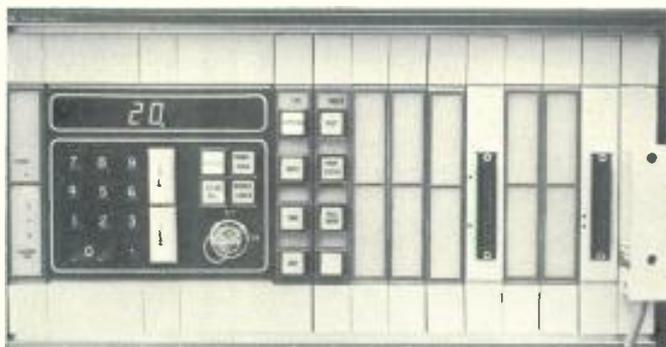

Control unit gives manual command of many parts of operation, each called up by number code using button array at left end



Production Studio, WRBR-FM, South Bend, Indiana.

## Electro-Voice's Greg Silsby talks about the Sentry 100 studio monitor

When I first described to Electro-Voice engineers what I knew the Sentry 100 had to be, I felt like a "kid in a candy store." I told them that size was critical. Because broadcast environment working space is often limited, the Sentry 100 had to fit in a standard 19" rack, and it had to fit *from the front, not the back*. But the mounting hardware had to be optional so that broadcasters who didn't want it wouldn't have to pay for it.

The Sentry 100 also had to be both efficient and accurate. It had to be able to be driven to sound pressure levels a rock 'n roll D.J. could be happy with by the low output available from a console's internal monitor amplifier.

The Sentry 100 also had to have a tweeter that wouldn't go up in smoke the first time someone accidentally shifted

into fast forward with the tape heads engaged and the monitor amp on. This meant high-frequency power handling capability on the order of five times that of conventional high-frequency drivers.

Plus it had to have a 3-dB-down point of 45 Hz, and response that extended to 18,000 Hz with no more than a 3-dB variation.

Since it's just not practical for the engineer to always be directly on-axis of the tweeter, the Sentry 100 must have a uniform polar response. The engineer has to be able to hear exactly the same sound 30° off-axis as he does directly in front of the system.

I wanted the Sentry 100 equipped with a high-frequency control that offered boost as well as cut, and it had to be mounted on the front of the loudspeaker where it not only could be seen but was accessible with the grille on or off.

I also didn't feel broadcasters should have to pay for form at the expense of function. The Sentry 100 had to be attractive, but another furniture-styled cabinet with a fancy polyester or die-cut foam grille wasn't the answer to the broadcast industry's real needs.

And for a close I told E-V's engineers that a studio had to be able to purchase the Sentry 100 for essentially the same money as the current best-selling monitor system.

I'm happy to report that we've achieved *all* our objectives.

Market Development Manager,  
Professional Markets

**EV** Electro-Voice<sup>®</sup>  
a gulton company

600 Cecil Street, Buchanan, Michigan 49107

In Canada:  
Electro-Voice, Div. of Gulton Industries (Canada) Ltd.,  
345 Herbert St., Gananoque, Ontario K7G 2V1.



Circle 149 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# Winsted



MODEL 901A

## EDITING CONSOLE

Holds  
all sizes of

**ENG/  
VTR**

equipment!

This totally modular console has every feature for editing efficiency — shelves that adjust on 1" increments, sliding pullouts for added working space and easy maintenance, total access to VTR's, editors, monitors and equipment. Rolls easily on large casters — even into a van to create a mobile unit! For full-line catalog of video consoles, tape and film trucks, film /videotape storage systems, call or write

THE WINSTED CORPORATION 8127 Pleasant Ave. So., Minneapolis, MN 55420  
(612) 888-1957 Toll Free Number: 800 328-2962

# Winsted

Circle 150 on Reader Service Card



## GRAHAM-PATTEN SYSTEMS

**Introduces a New Series of Video  
Line and Terminal Equipment  
that is Plug-in Compatible with  
The Grass Valley Group  
900 Series Equipment**

- AVAILABLE NOW — Model 9401 Video, Pulse and Subcarrier DA
- COMING SOON — Specialty DAs, Video Keyers, Mixers and DSKs
- DELIVERY — Stock to Four Weeks



**GRAHAM-PATTEN SYSTEMS**  
P.O. BOX 1980, GRASS VALLEY, CA 95845  
(916) 273-8412

Circle 151 on Reader Service Card

## Biggest Sat Net Supports Localism

strong community identification, not only with an extensive local news program but also with many interviews with local celebrities and discussion programs on local worries and opinions.

Valerie Aspinwall, program director, observes that this close connection with local thought is necessary to successful direction of the station. The station management knows how to reach local government on various problems and can advise call-in listeners how to get action.

From Mutual, WPBR takes the national and international news coverage, the Larry King show, the national commentators like Jack Anderson, and many of the other political discussion and the self-help programs. These complement and enhance the station's own programming position, making it more attractive to the large, affluent audience in the Palm Beach area.

An entirely different operation is that of WVHI-FM in Evansville, Ind. This station is devoted primarily to religious programming, both music and talk. But program director Mike Gillan points out that the religion-oriented audience welcomes a reasonable proportion of other kinds of programming, especially the news broadcasts. Also popular are national commentators like Jack Anderson and some of the Mutual sports programs, like the Notre Dame football games. Furthermore, WVHI has used a number of the music specials and sells local time on them to increase station income. Most of the station's programming is, of course, noncommercial, strongly supported by the station's audience.

A religious station with a somewhat different approach is WCPH in Etowah, Tenn. Kathy Wentworth, general manager, maintains that the programming is "100 percent gospel," but for news alone WCPH is glad to have the Mutual earth station. It is clear that any audience, no matter how specialized, wants regular newscasts today.

In Hagerstown, Md., WWCS uses a mix of modern country music, farm programs, and local news and discussion programs devoted to local issues, with a strong call-in operation. Again, the Mutual news is central, but the Dick Clark music programs have also been welcomed by the local audience and local advertisers. The Mutual discussion and self-help programs are also popular.

In Cincinnati, WSAI uses a modern country format on FM and strong news and "service" approach on AM. The two stations simulcast from 5:30 to 9:00 a.m. every day. Then the AM continues with a preponderance of traffic, local news, weather, and other talk and information material. The FM concentrates on the music.

Patricia Breuer says that both operations are successful; the FM is now the only Country "buy" in Cincinnati and the AM is strong with its community identification efforts. The Mutual news airs on both stations, as does the night-time Larry King show. Jack Anderson and other national commentators are added to the AM programming. A large proportion of the Mutual sports programs are fitted into one or another of the stations, with the Notre Dame football games very prominent and the station acting as the "flagship" for broadcasts of local college games, both in Cincinnati and on the road.

It is clear that the increasing variety of Mutual programming allows the local station to enhance a wide spectrum of local radio operations with material from the satellite.

BM/E

A professional Ikegami HK-312 studio camera is shown from a side-rear perspective. The camera is primarily white with a prominent red top cover. A black handle is visible on the side, and a black cable is plugged into a port on the front. The camera is mounted on a dark metal stand. The background is a dark, solid color.

# Self starter

For a fast start, no other studio camera comes close to the HK-312. It comes air ready. Just unpack it and it'll give you superior performance the first time. And, it'll keep working. The HK-312 helped establish Ikegami's reputation for legendary reliability.

The HK-312 is also an extremely stable camera that doesn't require time consuming adjustment. Add the optional computer setup and you can trim your daily checkout time even more—to less than a minute. Computer setup that has already proven itself at many leading stations.

The HK-312 includes all the essentials for

superior picture quality and performance. High resolution. Superb colorimetry. Plus an excellent signal-to-noise ratio. And with Ikegami Triax, you can extend the normal 600 meter cable length to 1500 meters with no compromise in picture quality.

One simple demonstration will show you why so many networks and leading independents are convinced that the HK-312 is the finest studio camera ever built.

To get started, contact Ikegami.

## Ikegami

Ikegami Electronics (USA) Inc., 37 Brook Avenue, Maywood, NJ 07607; (201) 368-9171

Northeast: (201) 368-9171  West Coast: (213) 534-0050  Southwest: (713) 445-0100  Southeast: (912) 924-0061  Canada: (201) 368-9179

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# TV test equipment from the inventors of the Plumbicon® tube.

At long last a new, reliable source of TV test equipment. One that offers fast, predictable delivery. One with a name all the world trusts—Philips. Four quick examples:

## PM5565 Waveform Monitor

Enjoy the luxury of examining one line and one field at a time. On top of this, there's a convenient front probe input so you can use the monitor as a troubleshooting oscilloscope.

## PM5567 Vectorscope

If you want more accurate decoding and the ability to have an external reference from composite video signals, choose our vectorscope.

Both waveform monitor and vectorscope mount side by side, fit all existing hardware and use less power than the competition.

## PM5539 Color Analyzer

Take it on a quick trip through your studio or control room and adjust all monitors to the same color temperature in a matter of minutes.

With four different memories, there's no problem in quickly calibrating four different phosphors.

Variable full-scale, from less than set up to more than reference white, allows measurement of color tracking as a function of APL.

## PM5534 Color Pattern Generator

Our universal pattern contains all the signals needed to verify overall system operation—directly from the picture. No wonder virtually every set manufacturer uses our pattern for their TV set alignment.

Of course our TV test equipment line doesn't end here. Today Philips offers a wide range of equipment including sync and pattern generators, VITS generators and analyzers, and TV modulators and demodulators.

For nationwide sales and service information call 800-631-7172, except in Hawaii, Alaska and New Jersey. In New Jersey call collect (201) 529-3800, or contact Philips Test and Measuring Instruments, Inc., 85 McKee Drive, Mahwah, New Jersey 07430.



# Philips, of course.



Test & Measuring  
Instruments

# PHILIPS

Circle 153 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# A COMPLETE SYSTEM CHECK CONFIRMS THE TOP QUALITY OF SATELLITE AUDIO

By Vladimir Nikanorov

***Is the great improvement in technical signal quality reported by radio managements with satellite earth terminals as good as it's cracked up to be? A series of tests carried out by Bonneville Broadcast Consultants, now distributing their syndicated programs via satellite link, has determined satellite performance in detail. Result: it's true.***

ONE OF THE STRONGEST attractions of satellite distribution of radio programming is the sharp improvement in technical quality of the received signal reported by users of the system. Radio managements with earth terminals are virtually unanimous in unreserved praise of the quality of the satellite signals.

Exactly how good is that quality? A study of the design of the Bonneville Broadcast Consultants studios and uplink facilities shows the organization and characteristics of a typical system in some detail. A testing of a complete ground-to-ground path has given concrete evidence of performance quality.

Bonneville is joining Satellite Music Network and WFMT, the Chicago fine arts station, in using subcarrier space provided by United Video on the satellite signal of WGN-TV, Chicago (see *BM/E*, September, 1981 p. 23). For the operation, United Video has just inaugurated its own new uplink facility built near Chicago. Satellite Music Network and Bonneville have also built studios specifically for putting their syndicated music programs onto the satellite link.

SMN's two stereo signals, the Bonneville and WFMT stereo signals, A Seeburg background music service in mono and, of course, the WGN video and video-audio, are all sent up to RCA's Satcom 1 via the United Video

uplink. The assignment is to transponder 3. When the new bird, Satcom 3-R, is aloft in late 1981, the United Video signal will be switched over, operating again at C band but with an increase of power from 5 W to 8 W.

## **The uplink from antenna to audio input**

The antenna in the uplink is a 10-meter design, Andrews Model ESA10-46B. It has a two-post transmit-receive feed, with low noise amplifier (LNA) and deicing equipment. The receive feed allows the signal from the satellite to be monitored right on the spot.

The antenna is fed by a 3 kW klystron high-power amplifier (HPA), which is fed in turn by an IPA using a traveling wave tube and 12-channel tuner. One channel is tuned to the portion of the 6 GHz band used by transponder 3 on Satcom 1.

The 6 GHz signal carries all the material noted above: four channels from SMN, two each from WFMT and Bonneville, one from Seeburg, and the video and video-audio signal from WGN. This array of signals reaches the final amplifier stages by frequency-division multiplex on the 70 MHz intermediate frequency, which is upconverted to 6 GHz ahead of the IPA. The 70 MHz comes from a combining system that takes in all the signals, each on its subcarrier frequency. Each of the subcarrier signals comes from a separate modulator, which has taken in one of the audio channels and put it on its particular subcarrier.

The modulators consist of a bank of more than a dozen Wegener WCI-1600's, widely regarded as one of the key elements in the transparency of satellite audio transmission. The Wegener modulator-demodulator pair includes a companding system for noise reduction that gains some 18 to 20 dB of subjective noise improvement. This is very important in the quality of performance because a satellite transmission chain, as a whole, has an inherently low signal-noise margin (see figure p. 82)

Bonneville's audio is put onto tape at 15 ips at the organization's Tenafly, N.J., production studio. The production equipment, as described in earlier articles in this magazine, has been set up for very close control of quality and careful audio processing. The tapes are carried to the

**Vladimir Nikanorov** is technical director, Bonneville Broadcast Consultants, Tenafly, N.J.

# Systems Check For Satellite Audio

new Bonneville studio at the uplink, where a commercial automation system puts them on the air.

The studio also includes voice announce facilities, a console, and cart recording equipment, so that the regular newscasts supplied to subscribers by Bonneville can be recorded. They are put onto the satellite by carts under control of the automation system.

The music tapes are played by Ampex ATR-100 machines, also under control of the automation system. Automation is used for efficient and precise adherence to the complex time formula necessary in the operation. Everything in the Bonneville studio is designed for audio performance that will exceed that available in well-organized FM broadcast stations.

## The downlink also aims for quality

The downlink facility is essentially the uplink in reverse, except that it handles only one set of subcarriers.

The major determining factor of the downlink performance is the S/N of the chain. This is critical because each element of the downlink contributes to the noise level. Noise is measured conventionally in degrees Kelvin, harking back to the days when LNAs were cryogenically

cooled parametric amplifiers.

The positive factor of the antenna, in terms of performance, is the gain, which depends generally on the size of the dish. The negative contribution is the noise temperature, which depends on the elevation angle at the particular site. If an antenna angle is less than 25 degrees, it will pick up noise energy from the ground. For Satcom 1 receiving stations in areas like New Hampshire, for example, the noise degradation can be over 20 degrees K. Some of the calculated specifications for receiving antennas are published with 30 degrees K allowance for low angle locations.

Antenna gain in respect to LNA noise temperature is G/T, a parameter that actually determines the quality of the downlink performance. Here is a simple calculation for G/T of the antenna/LNA combination:

$$G/T \text{ (dB)} = G - T$$

Where G is gain of antenna in db and T is noise of LNA in dB.

According to the formula:


$$T = 10 \log_{10} T \text{ degrees K}$$

For example, gain of a 3.7 meter dish is 41.7 dB. Typical noise figure of an LNA used with this antenna is 100 degrees K.


$$T = 10 \log_{10} 100 = 20 \text{ dB}$$

$$G/T = 41.7 - 20 = 21.7 \text{ dB}$$

*Simplified block diagram of downlink electronics used at uplink for monitoring signal quality delivered by satellite*

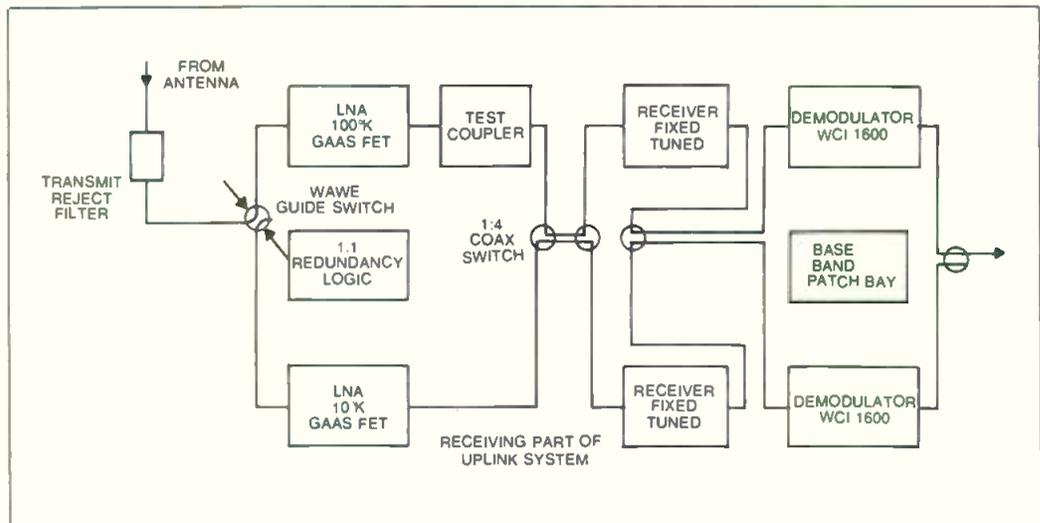

*Main units in test setup at receiving end for determining characteristics of ground-to-ground path*

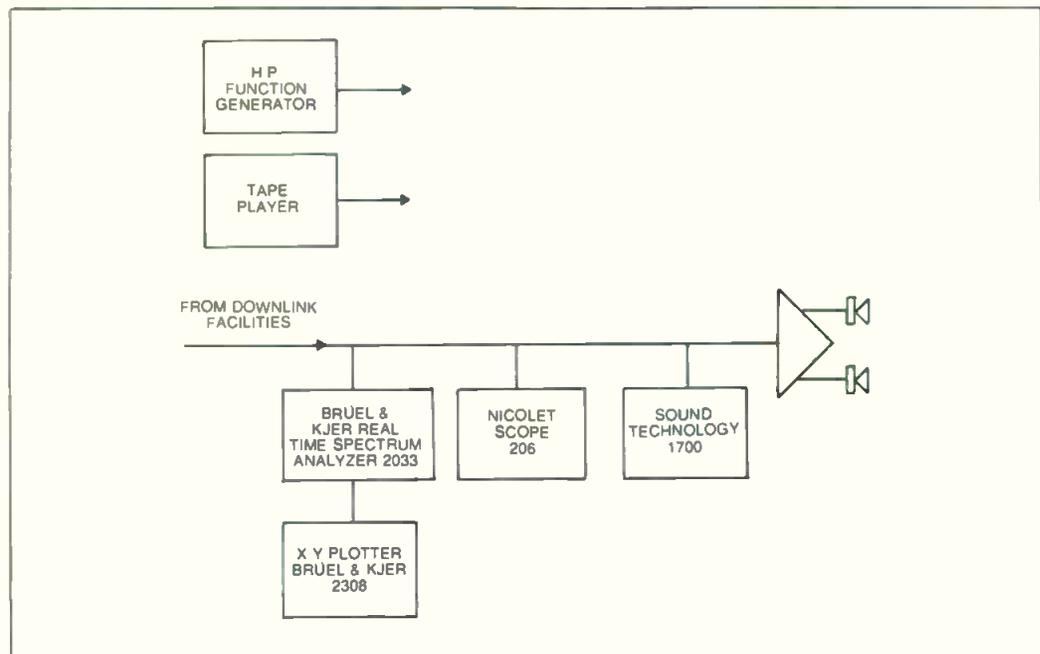


# Where You Need It, When You Need It.

Oki Portable Digital TV  
Standards Converter  
**LT1200**



The need for TV standards conversion doesn't stop at the studio door. That's why Oki developed the port-

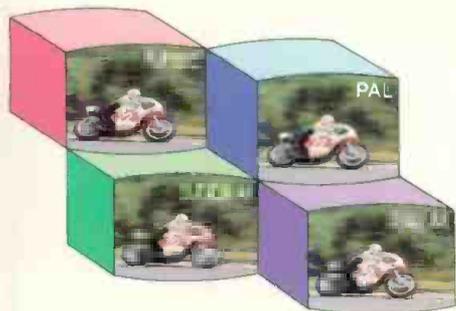

able LT 1200 Digital TV Standards Converter. The cost performance of this system sets the industry standard. And its reliability in the field as well as in rugged use in broadcast stations has earned the LT 1200 a reputation for dependable performance. Operation is totally automatic and totally simple. For converting NTSC, PAL, SECAM, or PAL M, leave it to the LT 1200. Wherever you are.

Oki also produces the high-end LT 1015Σ and LT 1100Σ Digital TV Standards Converters.



*In the U.S.A. and Canada, contact:*

OKI Electric Overseas Corp.  
One University Plaza,  
Hackensack, New Jersey  
07601 U.S.A.  
Tel: 201-646-0011-0015  
TWX: 7109905004 OKI ELEC HAK

*In Europe, contact:*

Technology Resources S.A.  
27-29 Rue Des Poissonniers  
92200 Neuilly-sur-Seine, France  
Tel: 747-4717, 747-7051  
Telex: 42610657 TERES

Head Office:  
Overseas Marketing & Sales  
10-3, Shibaura 4-chome,  
Minato-ku, Tokyo 108, Japan  
Tel: (03) 454-2111  
Telex: J22627  
Cable: OKIDENKI TOKYO

**OKI**  
electric  
industry  
company, Ltd.

Agent or Distributor inquiries invited.

Circle 154 on Reader Service Card

# COASTCOM has the answer for Radio Broadcaster's earth station Demod requirements . . . forever.



If you are a Radio Broadcaster about to purchase an earth station, you owe it to yourself to specify COASTCOM's Frequency Agile\* Demodulators. These units can tune in the network you want now, and the one you may switch to in the future . . . forever.

Compatible with NPR, Mutual, UPI, RKO, Transtar, USN, Muzak and many others. You might also use the agility to backup other fixed frequency demods, or provide the protection you need if/when satellite frequencies are changed.

Over 1500 COASTCOM Demods are now installed worldwide by broadcasters who demanded quality performance.

Get all the facts by contacting COASTCOM, 2312 Stanwell Drive, Concord, California 94520, Telephone (415)825-7500 TWX: 910-481-5781



\*Covers Whole Transponder



Circle 155 on Reader Service Card

## Systems Check For Satellite Audio

The downlink system carrier power-to-noise ratio (C/N) and subsequent S/N ratio are direct functions of G/T, provided the receiver is operating well above threshold. If the carrier power in an FM system is reduced so that instantaneous signal plus noise peaks are near zero, a disruption occurs in the discriminator, which causes clicks in audio. To avoid it, the carrier level should be better than 13 dB.

C/N measurement is relatively simple. First, the carrier power is measured by a power meter connected to a test point on the IF output of the receiver. Then the same measurement is repeated with the carrier down. It is very useful to conduct the measurements while gradually reducing the dish elevation. This measurement will help to find the critical position of the antenna as far the noise of the system is concerned.

Calculations show that a typical signal-to-noise ratio of the 15 kHz stereo demodulated channel is -45 dB as referenced to a 400 Hz level. A full blown formula and a numerical example are shown in the table.

It just happens that the FM demodulated noise power increases with the square of the noise frequency, which describes the power curve as parabolic. This means that the noise at higher frequencies is high, dropping very rapidly with decrease of frequency and becoming zero at dc. Because of its nature, the noise of 400 Hz bandwidth will be better than -65 dB. The combination of modulator and demodulator provides a possibility for noise reduction in the high frequency region. As already noted, the Wegener 1600 supplies about 20 dB of noise reduction, which brings the calculated overall noise down to -65 dB or better. To repeat: the determining factors of the downlink system performance are antenna gain and elevation and LNA noise temperature. The quality of the three is summed up by G/T. C/N of the system greatly depends on G/T. In turn, C/N determines S/N of the audio. S/N is improved by the Wegener compander, which compresses the audio on the modulator side and expands it at the demodulator.

### Signal-Noise Calculation

The calculation is based on the initial formula:

$$S/N = 3b^2 C/N$$

where S/N is signal-to-noise of demodulated audio

b is a modulation index

C/N is carrier power to noise power ratio.

C/N must be better than 13 dB.

Practical formula is as follows:

$$-S/N = C/N + 20 \log \beta_1 + 10 \log \beta_2$$

$$\beta_1 = \omega/2 f_s$$

$\omega$  is deviation of a main carrier by a subcarrier.

$f_s$  is a subcarrier frequency.

$$\beta_2 = 3 \omega_b^2/N^3$$

$\omega_b$  is deviation of subcarrier by the baseband signal.

$\omega$  is noise bandwidth of the baseband filter.

If pre-emphasis and compander are used, then the formula looks different:

$$-S/N = C/N + 20 \log \beta_1 + 10 \log \beta_2 + P + C$$

If C/N = 86.3 dB (worse case)

$$\omega = 6.54 \text{ mHz}$$

$$\omega_b = 50 \text{ kHz}$$

$$P = 12.4$$

$$C = 20 \text{ dB}$$

Then:

$$S/N = -86.3 + 26.3 + 26.5 - 12.4 - 20 = -65.9 \text{ dB}$$

# Introducing Electronic Cinematography

Ikegami takes the film concept, cinematography, and makes it a video reality. And what makes this possible is the Ikegami EC-35 electronic cinematography camera. It looks, handles and performs like a 35mm cine camera. So now you can shoot film-quality television productions on video tape instead of film... faster, easier and at lower cost.

The unique optical system accepts a variety of prime and zoom lenses designed by Canon and Fujinon. And, because the lens ideas come from 35mm cine cameras, you'll find T-stops as well as familiar viewing angles.

To bring out the best in the unique optical system, advanced electronic circuitry is employed. For example, a specially designed FET preamp, used in conjunction with 2/3" low-capacitance diode-gun Plumbicon\* tubes, operated in a high voltage mode, deliver an extra-ordinary S/N of 57 dB. The EC-35's

ability to compress highlights while retaining detail, combined with a full complement of operational auto-matics, make it probably the best video camera available today.

As for handling, the EC-35 is very similar to a 35mm cine camera. On the tripod or off, it lets you use film techniques and lighting. And you'll find familiar features like a matte box, and follow-focus mechanism. What's more, the EC-35 utilizes the Emmy-award winning digital techniques that assist in the adjustment of routine daily functions. So you can spend more time shooting.

For a demonstration of electronic cinematography, contact Ikegami.



## Ikegami EC-35

Ikegami Electronics (USA) Inc., 37 Brook Avenue, Maywood, NJ 07607: (201) 368-9171

Northeast: (201) 368-9171  West Coast: (213) 534-0050  Southwest: (713) 445-0100  Southeast: (912) 924-0061  Canada: (201) 368-9179



Circle 156 on Reader Service Card

\*Registered TM of N.V. Philips

# "ONE INCH" AUDIO FROM NEVE.

There is one audio mixer that complements the new 1" VTRs. Designed for both production and post production needs, the Neve 542 Series is available in 8 models with 6 to 16 inputs, including a truly portable Ni-Cad powered 8 input suitcase mixer. With Neve's superior quality and support at an affordable price, you can be assured that your audio productions will do justice to your new (or existing) TV and video facilities. Please call or write today for Neve's comprehensive TV audio console information package.

Model 5422  
Suitcase Mixer  
Ni-Cad powered

Other 542 Range Mixers  
Model 5422R Rack Mount  
Model 5432  
Table Drop Through  
Model 5452  
12 or 16 Inputs

Model 5442  
Table Top  
Mixer

#### Partial Listing of Recent 542 Range Customers:

ABC-TV • Best Audio • CBS Radio • CBS-TV • CFMT-TV • CFTO-TV  
Cinemix • Complete Post • CPTV • Global • KGTU • KRMA-TV • KTTV  
Matrix • Optimus • Premore • Producers Color • Reeves • Skaggs  
Telemation • Teletronics • TPC • WEAM • Wickreworks • Windsor  
WNEW-TV • WTAE • WXXI

 **Neve**

Rupert Neve Incorporated Berkshire Industrial Park, Bethel, Connecticut 06801 Tel: (203)744-6230 Telex: 969638  
Rupert Neve Incorporated 7533 Sunset Blvd., Hollywood, California 90046 Tel: (213)874-8124 Telex: 194942  
Rupert Neve Incorporated P.O. Box 120907, Nashville, Tennessee 37212 Tel: (615)385-2090  
Rupert Neve of Canada, Ltd. 2721 Rena Road, Malton, Ontario L4T 3K1, Canada Tel: (416)677-6611 Telex: 983502  
Neve Electronics International, Ltd. Cambridge House, Melbourn, Royston, Hertfordshire, SG8 6AU England Tel: (0763)60776  
Rupert Neve GmbH 6100 Darmstadt Bismarckstrasse 114, West Germany Tel: (06151)81764

Circle 157 on Reader Service Card

# Systems Check For Satellite Audio

## Measuring the chain

Anyone who has ever worked in radio broadcasting knows that the reality of practice often contradicts the theory with all its wonderful calculations. Curiously, sometimes the worse or the theoretically forbidden turns out to be the common practice of the industry. A good example is compression of audio for radio broadcasting. It is recognized that compression destroys the original structure of the sound. Yet no radio station dares put out the signal without using some compression.

But compression as now widely practiced does not work at all in the case of audio transmission via satellite. If the peak density of the high-frequency region is high from an excess of compression, then the noise reduction is not taking place and the audio will become literally covered with "hiss."


With this in mind, we conducted measurements to find the capability of Bonneville's system and the parameters that would be critical for audio transmission. The measurement chain was probably one of the longest ever.

The function generator was located in Atlanta at one of the CATV stations similar to the Bonneville uplink. (A 10-meter transmitting dish, 3 kW HPA, and a Wegener 1600 series modulator were the main components of the Atlanta uplink.) The signal was beamed to transponder 3 on Satcom 1 and received at earth station of Bergenfield Cablevision System of New Jersey.<sup>1</sup>

A block diagram of the measurements with equipment description is shown in the accompanying diagrams. Not

<sup>1</sup>Bonneville thanks engineers Louis Livaditis of Wegener Communications in Atlanta and Joe Azzara of Bergenfield Cablevision System of New Jersey for their interest in measurements and cooperation.

*Fundamental at 400 Hz, +18 dBm, is marked "1" above, with second, third, and fourth harmonics at 2, 3, and 4 respectively*

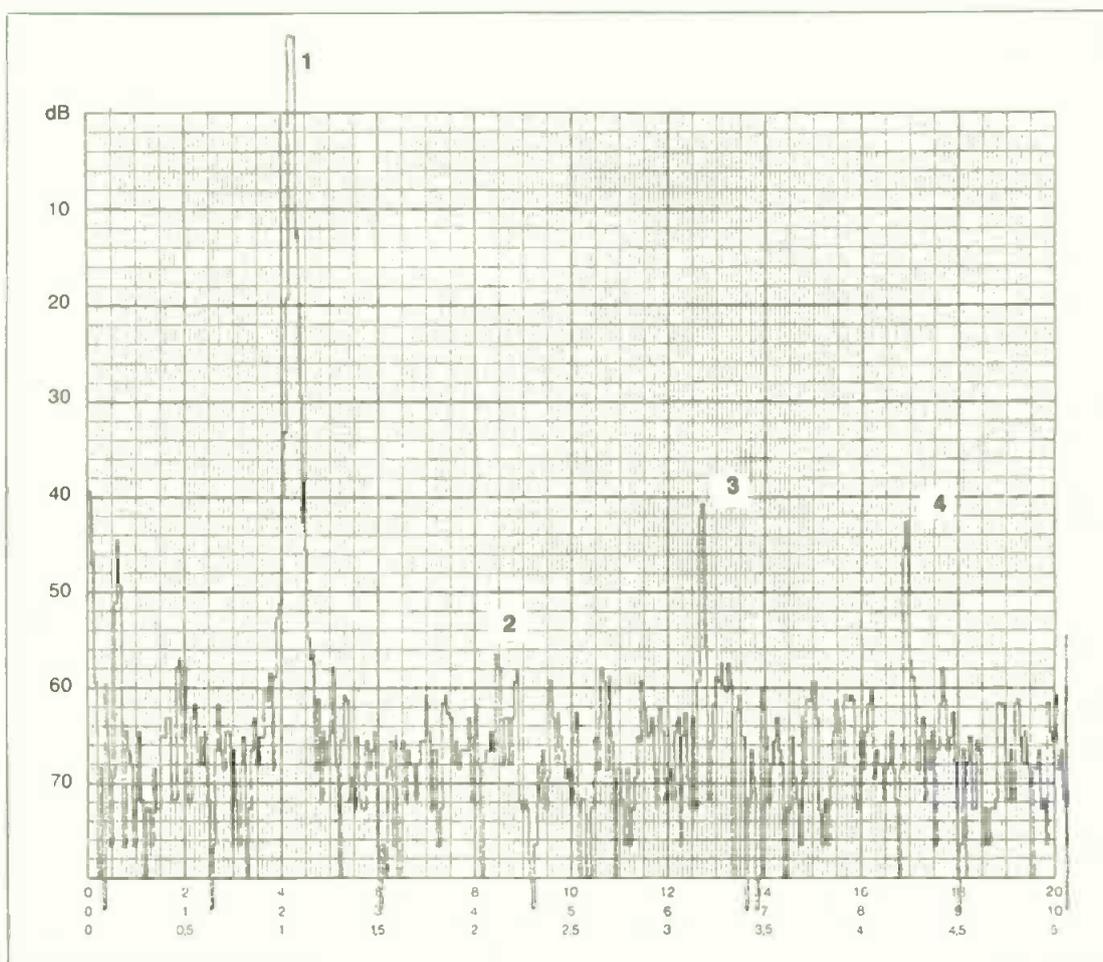

only was the test itself unprecedented, but the procedure was much more fun than might appear from the description. And the results were surprisingly good. The following parameters were measured: signal-to-noise ratio and noise distribution throughout the frequency range; total harmonic distortion; even and odd harmonic values; headroom of the system; even and odd harmonic values under extreme conditions; total intermodulation distortion; and frequency response.

In addition, the word "this" was played through the system. The word was pronounced and recorded by Jim Stagnitto, the production wizard of Bonneville. At the end there was also a piece of Bonneville-produced Beautiful Music, that stirred everyone's emotions.

## S/N, distribution of noise


The system has unity gain, so the +8 dBm at 400 Hz tone, which was fed in by Atlanta, appeared as +8 dBm at 400 Hz on the audio output terminals at Bergenfield. The chart shows an astonishing -69.1 dB of S/N. Actually, the figure is a very conservative averaging. The noise level is dependent on frequency. In a frequency band of 50 Hz to 1 kHz, only a few noise peaks reach the average level. Noise in the 1 kHz to 15 kHz band is -10 dB below the average, so the "hiss" level is -79.1 dB. The only components that are +10 dB higher than the average are the peaks below 50 Hz.

## THD, second and third harmonics

Total harmonic distortion as registered by the Sound Technology 1700 series was 0.1 percent. It was measured in reference to the same +8 dB 400 Hz tone. The chart shows that a good part of the total measurement falls on the second harmonic level, which is -44.2 dB. The third

## Systems Check For Satellite Audio

Frequency check shows flat response to 15 kHz, with 50 Hz at 1, 400 Hz at 2, 1 kHz at 3, 5 kHz at 4, 10 kHz at 5, 12 kHz at 6, and 15 kHz at 7

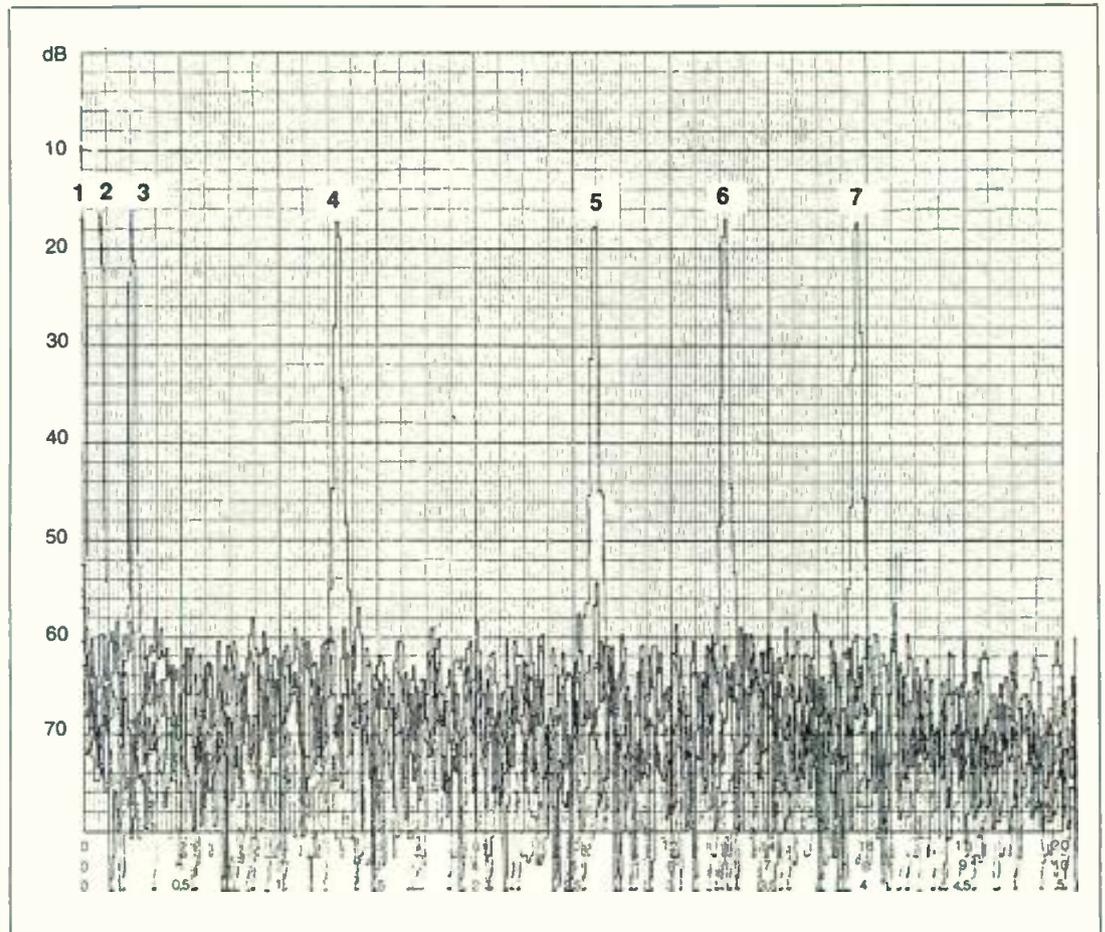

harmonic is at  $-59.1$  dB.

It is known that the even harmonics — second, fourth, and so on — are much more pleasing from a listening standpoint than the odd harmonics. In fact, the so-called aural processing by Aphex, which is widely used in the recording industry, is actually based on artificially created even harmonics added to recorded music. All this means that the effect of THD at this very low percentage will in reality produce an effect even smaller than the figure suggests.

### System head room

Headroom measurements are always controversial because each tester seems to have an individual idea of what value of THD should represent the limit of the “room” in which audio appears to be undistorted. To avoid controversy, the measurement was conducted at  $+18$  dBm. This figure was chosen because peaks on the Bonneville recorded music typically reach  $+10$  dB above the average. Therefore, it made sense to find out what happens in the system when such a peak occurs.

The Sound Tech registered 0.4 percent THD referenced to  $+18$  dBm at 400 Hz. The spectra on the chart show second, third and fourth harmonics of the 400 Hz tone. The second harmonic level did not increase in comparison with the first measurement. The third harmonic was measured at  $-51.6$  dB and the fourth at  $-52.9$  dB. By the measurements, the system performed extremely well. Again, an expected listening result should be even better than the measurement suggests because of the positive contribution of the even harmonics.

The TIM distortion measurement, shown on chart 3, reveals 0.1 percent distortion, which can be regarded as

excellent performance.

### Frequency response

Frequency response was taken with discrete frequencies at  $+8$  dBm. The intention was to find the system's linearity and high order harmonics levels in comparison to noise. The high frequency steady tones of  $+8$  dBm defeated the noise reduction system.

It should be noticed that the normal high frequency content of music material is more than 15 dB below the average level of the mid frequencies. The chart shows fantastic linearity throughout the 50 Hz to 15 kHz band. It is also clear that the high-order harmonics are basically at the same level as the high-end noise and, along with the “hiss,” will be reduced by the noise reduction system.

### Program checks

The peak of the fun came when it was time to record Jim Stagnitto's “this” on the spectrum analyzer. The 5 kHz scan was synchronized with the word, the spectrum of which can be found on the chart. We encountered no sibilance from the “s” in the area of 4 kHz.

Of course, the ultimate and the final test was music. A piece with Anita Kerr and singers, recently recorded in England for Bonneville by Marlin Taylor, was chosen for vocal susceptibility to sibilance and for its good dynamics. The impression was that the transmission chain works as well as a straight wire.

Thus present satellite transmission technology offers an open road to technical excellence. With the coming proliferation of audio transmission via satellite, top-grade signal quality will be widely available for radio operations.

BM/E

# Cost effective!

Can you afford not to consider cost-effectiveness when purchasing a video editing system?



Visit our  
Booths 518-520  
& 534-536 at  
the SMPTE Show.

**FACT: Price/performance.**  
The Datatron Vanguard™ delivers more editing power, for fewer dollars than any other system.

**FACT: Speed of operation.**  
The Vanguard edits faster, with fewer keystrokes, and automates more functions than competitive systems. The Vanguard is simple to operate and easy to understand.

**FACT: Reliability.** The Vanguard works "out of the box" and keeps on working. Datatron has been building reliable editing systems since 1967.

**FACT: The Vanguard has standard features that others charge extra for —** i. e., Memory, List Management, Time Code Readers, and more...

**FACT: The Smart Scan™ allows manipulation of time —** one thing money can't replace. Capable of edit compression, expansion and motion effects.

**FACT: The Vanguard can be purchased for significantly under \$50,000.**

**FACT:** Cost effectiveness may be an extra to others, but it's standard in...

**VANGUARD**  
*The Trendsetter*

**datatron, inc.**

**VIDEO SYSTEMS DIVISION**  
2942 DDW AVENUE • TUSTIN, CA 92680  
714/544-9970 • TWX 910-595-1589

Circle 158 on Reader Service Card

# "OUR CONVERGENCE EDITING SYSTEMS REALLY DELIVER"

Isaac Hersly, ABC

"ABC Network News depends on Convergence editing systems. We need speed and precision to produce top quality programming worldwide within tight deadlines, and our Convergence editing systems really deliver."

Isaac Hersly,

American Broadcasting Company

Isaac Hersly, Equipment Planning Engineer for ABC Broadcast Operations, selected Convergence ECS-100 joystick videotape editing systems for his Network for many reasons – dependability, easy operation, affordability – But most of all, for the standard features that make these microprocessor-based editing systems top performers in the most demanding broadcast environment.

ABC uses Convergence editing equipment for ABC Network News, 20/20, sporting events, and countless other productions such as their outstanding coverage of the 1980 Winter Olympics,

and the 1980 Republican and Democratic National Conventions. Hersly says, "With Convergence editing systems, expanded use of ENG camera crews is possible, and the American public sees better prime time network news."

**CONVERGENCE CORPORATION**

1641 McGaw, Irvine, CA 92714  
Tel: (714) 549-3146, Tlx: (910) 595-2573  
250 W. 57th Street, Fisk Building, Suite 815,  
New York City, NY 10019  
1 Lochaline Street, London W6 9SJ U.K.  
Tel: 01-741 7211, Tlx: 851-27950 MONREF G

Circle 159 on Reader Service Card

# LOCAL RADIO SCORES IN U.K.

**With more and more Independent Local Radio stations being authorized, Britons are tuning away from BBC to get community news and entertainment. Not to be outdone, BBC Local Radio is fighting back with "community action."**

LOCAL RADIO is a resounding success in the U.K., with Independent Local Radio (ILR) stations now garnering more listeners than any of the four BBC national networks. When it comes to local news and information, BBC Local Radio scores well, too. The share of listeners tuning in to local radio is growing. From 1978 to 1979 both ILR stations and BBC Local Radio increased their shares about one percent each. With more local stations being authorized (see box), the share is sure to increase in the future.

A major study in September of 1980 showed station choices for various kinds of listening.

## STATION CHOICE FOR PROGRAMMING REQUIREMENT

Of all those listening to radio for:	Proportion (by percent) who most often choose:					
	ILR	Radio 1	Radio 2	Radio 3	Radio 4	BBC Local Radio
World and national news	32	19	18	1	18	9
Local news and information	73	3	3	—	2	16
Background music	37	27	24	2	2	5
Concentrated music listening	24	22	20	10	9	5
General entertainment	22	7	19	2	31	7
Current affairs, etc.	28	9	11	2	31	7
Sports coverage	35	8	30	4	7	13

(BBC Radio 1 is a popular-taste station. BBC 2 is MOR, BBC 3 is the cultural station, and BBC 4 is news and entertainment.)



Radio Norfolk's news editor, Ian Hyams, broadcasts a live report from the station's OB vehicle

Although these figures show ILR stations to be more popular than BBC Local Radio, the statistics do not provide the whole picture. There are more ILR stations and several in large markets. There are two in London, for example. BBC Local Radio, on the other hand, tends to be in smaller markets. Generally, BBC Local Radio draws about as well as BBC 4. In locations that boast both an ILR station and a BBC Local Radio station, the BBC station may lead.

While both ILR and BBC Local Radio stations concentrate on producing local news, ILR stations tend to rely on popular music. BBC Local Radio, on the other hand, characterizes its outlets as community-action stations.

Last year, Radio Norfolk became the twenty-first BBC Local Radio station to go on the air — and the first BBC

# Cleaner, Brighter, Louder

OPTIMOD-AM permits progressive AM broadcasters with quality plants to broadcast a standout signal with improved coverage.

The signal is processed for common automobile, table and portable radios to achieve outstanding speech intelligibility, musical definition and freedom from distortion.

And the versatile new OPTIMOD-FM Model 8100A is even cleaner, brighter and louder than the industry-standard Model 8000A it replaces.

The new 8100A was computer designed and refined by hundreds of hours of listening to set the new quality standard for FM in the 80's.

AM or FM—OPTIMOD creates sound that dominates the dial. For all the details, call Toll Free (800) 227-4498, In California (415) 957-1067, or write for the name of the Orban Broadcast Dealer nearest you.

**orban**

Orban Associates Inc., 645 Bryant Street, San Francisco, CA 94107 Telex: 17-1480 Cable: ORBANAUDIO



For Information on Optimod-AM Circle 231 on Reader Service Card

For Information on Optimod-FM Circle 232 on Reader Service Card

## Local Radio Scores In U.K.


local station to have stereo facilities (it operates on two channels: 855 kHz AM and 95.1 MHz FM). Radio Norfolk's theme at its opening was "your new neighbor." Manager Mike Chaney explained, "We want our programs to lean over hedges and harbor walls. This can be done because we have reporters and a radio car that can broadcast live anywhere in Norfolk county." As do other local radio stations in the U.K., Radio Norfolk believes that the route to successful, audience-serving programming is partnership with the local community.

Radio Norfolk's staff is similar to those of other BBC Local Radio stations and numbers about 20, plus two secretaries. A manager and deputy manager head the group, which also includes five reporters, a sports manager, a program organizer, and five general-purpose program producers. Three technical persons are on staff. About 70 hours of home-grown material are produced each week. (Hours vary depending on budgets; lately the BBC has cut back in many areas.)

BBC Local Radio stations urge citizens to seek out the station's microphone. Radio Brighton, for example, is experimenting with "do-it-yourself radio," giving groups and organizations a chance to make their own programs under the guidance of a producer.

About two-thirds of local radio programs are talk shows — news, discussions, phone-ins, and documentaries. The rest offer music chosen to serve a range of tastes.

Local radio cares about people. Radio Merseysides and Radio Bristol have been very successful in getting local

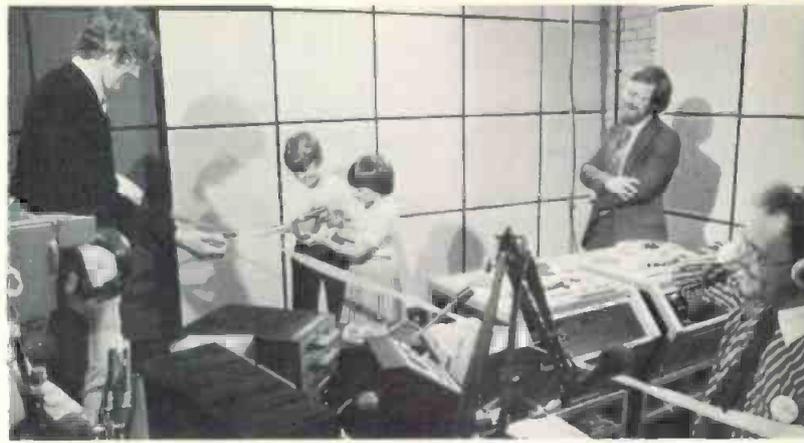

Community involvement from the start: Norfolk children "officially" open the station as TV records ribbon cutting

pubs, clubs, and factories to raise money for toys for the underprivileged; Radio Newcastle helps reunite old friends who have lost contact; Radio Leeds has a program, *Contact*, aimed at helping the handicapped.

Radio Solent covers a wide agricultural area, and its *Advice Line* program has often looked at the problems of rural transport and the closure of village shops. Some Radio Nottingham programs have focused on people who live in remote areas, particularly the house-bound. Radio Carlisle locates foster mothers for orphaned lambs.

Local Radio is also useful to the elderly. Radio Nottingham's *Link Opportunity* is designed to utilize the skills and knowledge accumulated by retired people during their working lives. Putting up a shelf, fixing a gate, knitting, baking a pie, teaching a foreign language, and typing are

# Optimod quality in your production room!


Now Orban brings the natural, transparent Optimod-FM sound to a stereo compressor/limiter designed specifically for production work. Set our 418A once and forget it; from then on it guarantees clean, uniform cuts regardless of operator skill and experience. The 418A's smooth subtle broadband compressor prevents overload distortion; its separate high-frequency limiter guards against preemphasis-induced tape saturation.

You can use the 418A as a safety limiter or you can use it to drive your microwave STL to your Optimod-FM. Either way, its accurate stereo tracking makes it ideal for FM Stereo today—or AM Stereo tomorrow.

The time-saving 418A gets it right the first time—and *that* savings can mean more consistent quality and healthier ratings! See your Orban dealer for all the details or call for the dealer nearest you.

**orban**

Orban Associates Inc. 645 Bryant Street San Francisco, CA 94107 (415) 957-1067

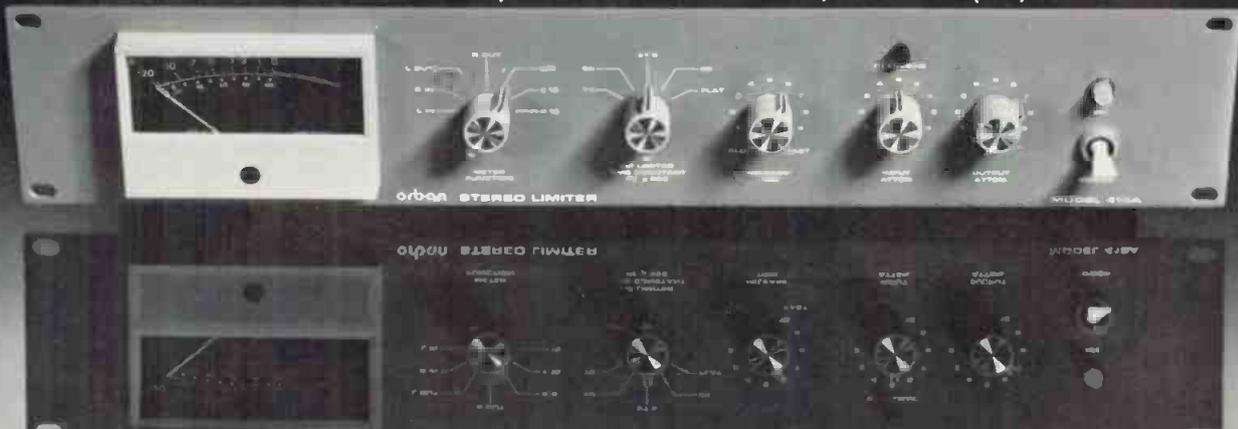

Circle 162 on Reader Service Card

## Local Radio Scores In U.K.



Cardiff Radio's governing body huddle on a problem. Members are elected by the public within the listening area

vivid examples of this self-help swap shop.

Radio Sheffield runs a community program called *Pack Up Your Troubles* that assists people with problems and tells them about the services of voluntary groups like the Samaritans, the Council for Voluntary Service, and Citizens' Advice Bureaus. So far, officials from more than 50 organizations have taken part.

Local phone-ins allow as many people as possible to debate vital topics. Last year, Radio Nottingham put about 5000 callers on the air during its *Open Line* program. Calls often involve offers of help or ideas to make life easier.

The stations also help people with social and personal problems. Manchester's *Give and Take* program has ben-

efitted children, old folk, battered wives, the blind, the homeless, and the unemployed. Items ranging from blankets to baked beans, paperbacks to washing machines, boxing gloves to lawn mowers, have been donated in response to appeals on the program.

Consumer advice programs are also strong on Local Radio. On Radio Merseyside, about 600 people each year have been helped by the *Town and Around* series.

### ILR stations are action-oriented too

BBC Local Radio stations are not alone in serving their communities. ILR stations do so, too, while at the same time earning a profit by selling advertising.

Cardiff Radio has a daily program called *Action Desk*, a cross between a radio newsdesk and an advisory service. With the help of community organizations and individuals formed into *ad hoc* groups, *Action Desk* has focused on such topics as leasehold, conservation, women's aid, therapy services, the Asian community, Gamblers Anonymous, local theatrical projects, and youth unemployment. The program is operated by six paid staff, who are grant-funded plus volunteers. *Action Desk* had funding up to this October, with negotiations underway for a 12-month renewal.

The station is currently planning a show, *Equal Opportunities Worker*, that will concentrate on programs and program inserts for, about, and by women.

Radio Cardiff is a bit unusual for an ILR station in that it is owned by a community group. About \$700,000 in initial capital was raised from local companies, local churches, trade unions, and individuals.

While Radio Cardiff might be expected to be more


# "The Missing Link to Reliable Cart Music Reproduction Has Been the Cart...Not the Cart Machine."

I've been using the Audiopak AA-3 at various stations for over two years, with gratifying results.

The AA-3 is capable of studio master music reproduction with excellent stereo phase stability.

It is durable and reliable in performance throughout its long life.


In my opinion, the AA-3 is the best cart we've tested."

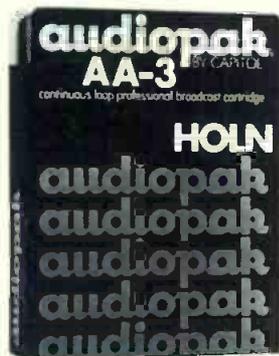

AA-3 - THE MISSING LINK  
For stations who care how they sound

### Elliott Klein


Corporate Director of Engineering,  
Buck Owens Broadcasting Group  
Chief Engineer, KNIX AM & FM,  
Phoenix, AZ  
Consultant to:  
Scripps-Howard Broadcasting Co.  
(Radio Division)  
Sunbelt Communications Ltd.  
The Research Group  
Translar Network

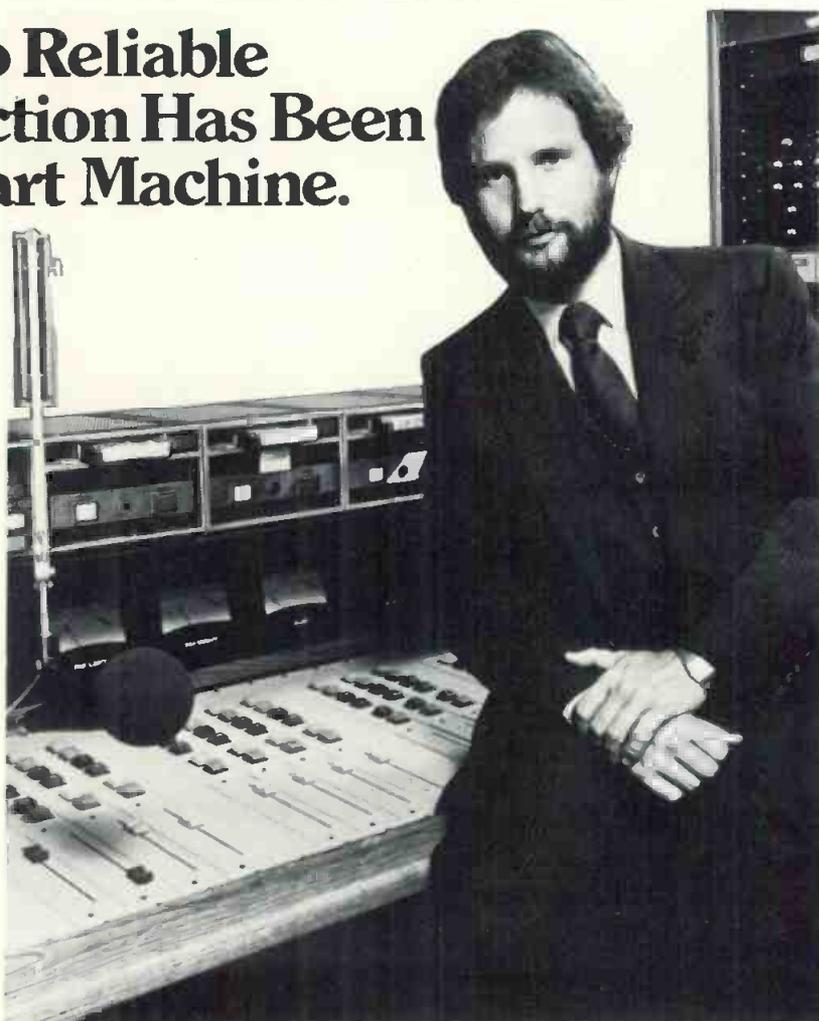

CAPITOL MAGNETIC PRODUCTS  
A Division Of Capitol Records, Inc.  
6902 Sunset Blvd., Hollywood, California 90028 (213)461-2701  
© 1981 Capitol Records, Inc.

Circle 163 on Reader Service Card

# PEIRCE-PHELPS. FOR EVERYTHING FROM MINI-VANS TO MAXI-STUDIOS

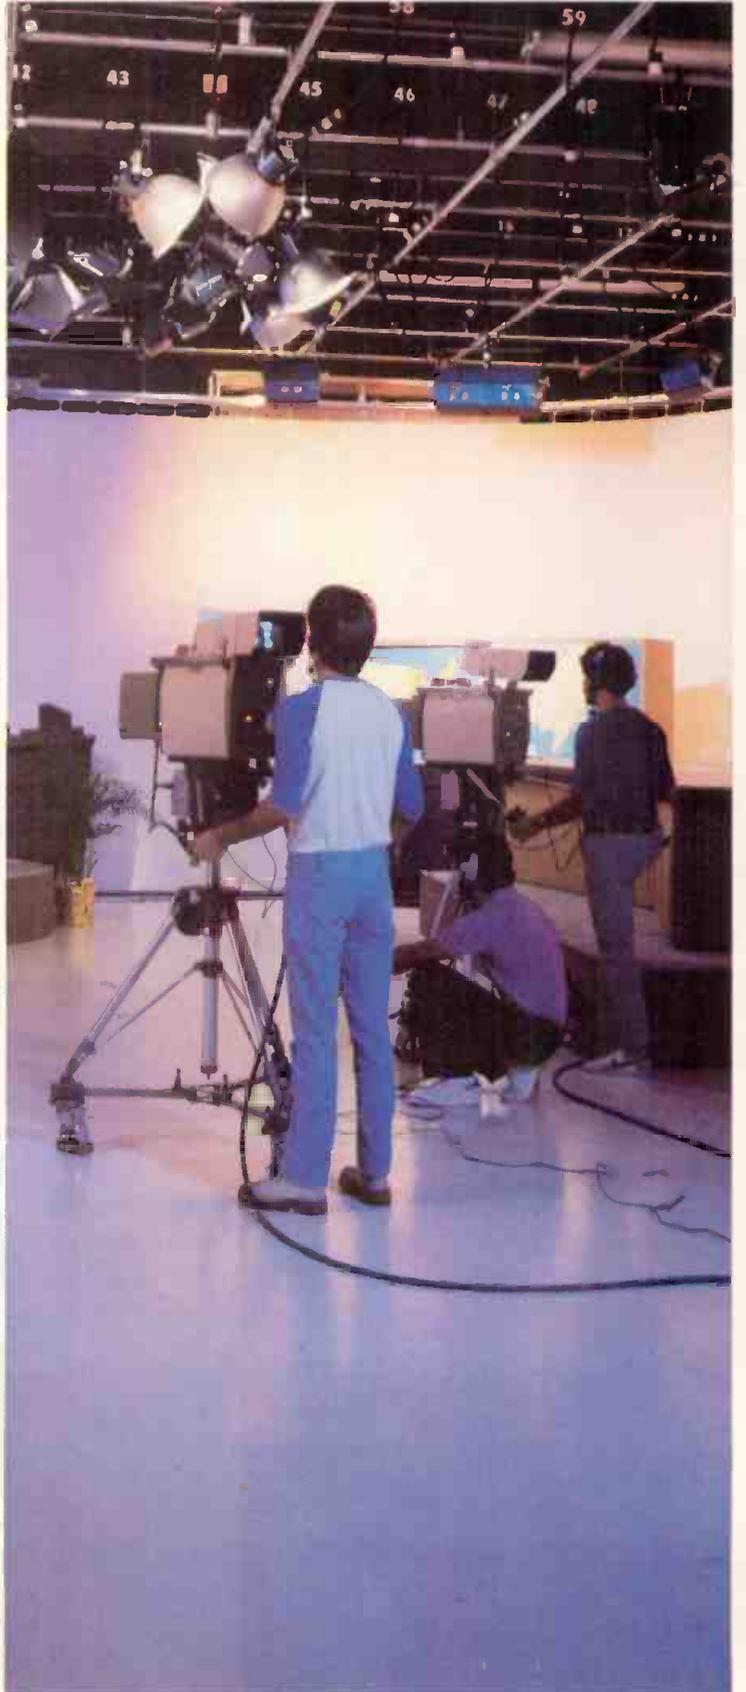

We just supplied a compact news van to Warner Amex in Mesquite, Texas. And an on-air production studio to WWAC-TV in Atlantic City. Now we'd like to do something for you. Call or write and tell us what you need.

## PEIRCE-PHELPS, INC. VIDEO SYSTEMS DIVISION

2000 N. 59th Street, Philadelphia, Pa. 19131, 800-523-4682. In Pennsylvania, call 215-879-7171.

Circle 164 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)



Best Picture:  
**SCOTCH ONE-INCH  
VIDEO TAPE**

Scotch™ is a registered trademark of 3M.

For the second year in a row, Scotch® 479 won the award for the best picture of the year in a test of one-inch video tapes.

We scored well in all of the twelve categories tested, but especially well in the categories that commonly represent picture quality: color dropouts, high frequency dropouts, chroma noise, signal-to-noise ratio and stop motion.

These were scientific, quantitative tests, conducted as you would conduct them yourself, with no room for brand bias. The meters didn't play favorites. The standards were the same for every brand tested. And we tested every brand.

These kinds of test results don't surprise us. We pioneered the invention of video tape. And we've been setting the standard for quality ever since.

Our quality has always been consistent from the first replay to the

last. In fact, our sophisticated binder and oxide coating are more advanced than the binders and oxides on some quad tapes. They had to be advanced to meet the special durability demands of one-inch video production.

So choose Scotch 479 for your one-inch video production. You'll find it looks good from repeated mastering all the way through post production. And we've seen the test results to prove it.



**3M**

## Local Radio Scores In U.K.

community-oriented than others, community service is expected from all ILR stations. For example, Radio Hallam, a privately owned ILR station, got behind Doncaster's mayor to spearhead an anti-litter drive by organizing a song contest that helped draw attention to the campaign.

Radio Hallam, incidentally, has four different types of vehicles to get it into the community. First is a news car for reporters. A second vehicle is a complete radio car that is equipped to transmit live from the countryside using Moseley remote pickup equipment. The radio car also can act as a relay station. Radio Hallam's pride is a fully equipped recording vehicle that includes a 32-input two program channel Tweed audio console. This unit can serve as a complete control room for picking up concerts on location. Other equipment in the van includes Studer tape recorders, JBL monitors, and Audio and Design Recording's audio processing equipment. In addition, Radio Hallam has a caravan (mobile house trailer) to serve as a studio for on-location community events.

ILR stations boast that over 52 percent of the people residing in their areas tune in ILR stations. With the expansion that is planned, over 80 percent of the population of the U.K. will soon be served.

### Local radio councils for BBC stations

One of the reasons BBC Local Radio is successful in meeting community needs is that each station has its own local advisory council. Some, like Nottingham's, have special subcommittees dealing with specific sections of

## Community Stations On The Rise

Local radio did not begin in the U.K. until late 1967, one year after the government authorized the BBC to set up nine local stations. Following a formal assessment toward the end of 1969, 12 more were authorized. Commercial radio began in 1973, again one year after a government White Paper entitled *An Alternative Service for Sound Broadcasting*. With the launching of ILR (Independent Local Radio), the monopoly held by the BBC ended. In a departure from the past, ILR stations were authorized to sell advertising.

At the close of 1981, 22 BBC local radio stations were on the air, with six more under construction. Ten more have been authorized, which will bring the total to 38 when all are completed.

ILR stations on the air at the end of 1976 numbered 19, but an expansion was authorized in 1978 permitting nine more. Then in 1979, 15 more ILR stations were authorized. This number was extended yet again when another 25 got the go-ahead in 1981. This year, franchises were awarded to the 15 authorized in 1979 so that 43 ILR stations will soon be on the air. With 38 BBC Local Radio stations and 68 ILR stations authorized, the U.K. will soon be served by 106 community stations.

the program content, such as educational and religious programs and programs for minorities. Every effort is made to avoid "stodgy" educational programs. On the political front, Local Radio tries to get local officials on the air to present their views.


Councils are a constant reminder that Local Radio is a cooperative activity between professional broadcasters and the community — not a mere provider of programs for listeners.

BM/E

## Reading this ad may solve your next audio problem

Solving audio problems is a daily requirement for the professional. Often, the solution requires the use of accurate test instruments, with a high degree of reliability.

The Spectra Sonics Model 510 Bandpass Filter and the Model 802 Signal Generator are the answer to your service requirements, permanent or portable. The battery powered units are accurate, reliable, compact, affordable, and easy to use.

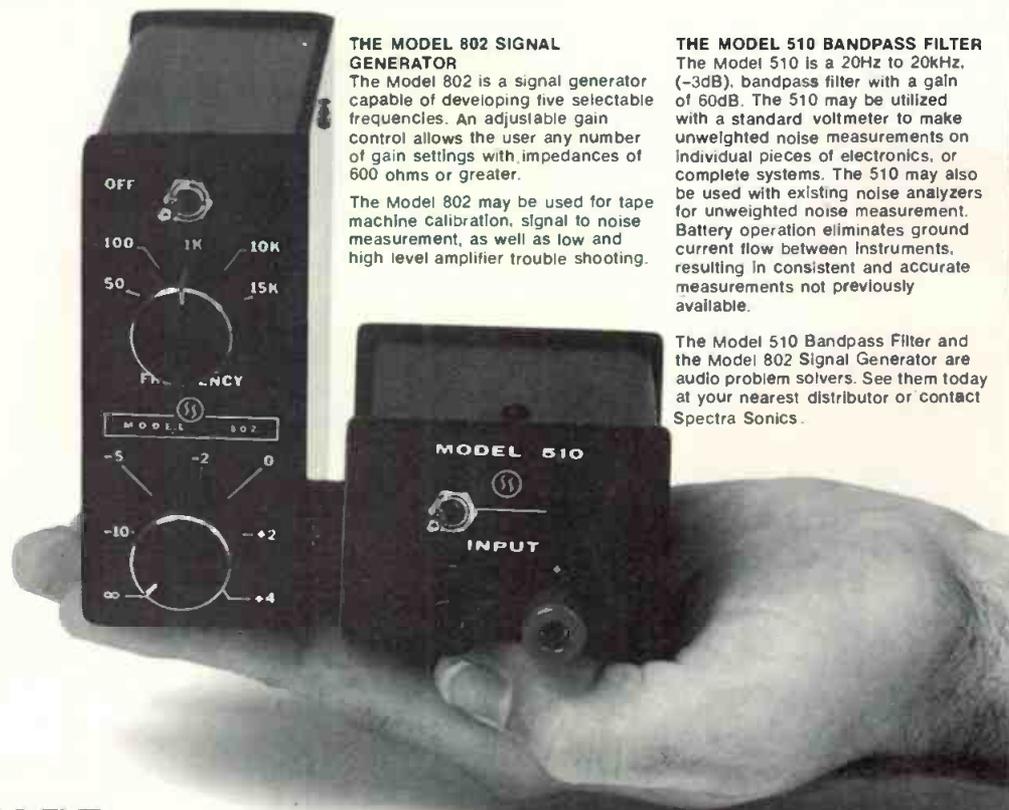

### THE MODEL 802 SIGNAL GENERATOR

The Model 802 is a signal generator capable of developing five selectable frequencies. An adjustable gain control allows the user any number of gain settings with impedances of 600 ohms or greater.

The Model 802 may be used for tape machine calibration, signal to noise measurement, as well as low and high level amplifier trouble shooting.

### THE MODEL 510 BANDPASS FILTER

The Model 510 is a 20Hz to 20kHz, (-3dB), bandpass filter with a gain of 60dB. The 510 may be utilized with a standard voltmeter to make unweighted noise measurements on individual pieces of electronics, or complete systems. The 510 may also be used with existing noise analyzers for unweighted noise measurement. Battery operation eliminates ground current flow between instruments, resulting in consistent and accurate measurements not previously available.

The Model 510 Bandpass Filter and the Model 802 Signal Generator are audio problem solvers. See them today at your nearest distributor or contact Spectra Sonics.

# SPECTRA SONICS

LEADER IN ADVANCED TECHNOLOGY

3750 AIRPORT ROAD OGDEN, UTAH 84403 801-392-7531



Circle 166 on Reader Service Card

BM/E NOVEMBER, 1981 97

# We have on hand what you have in mind.

We had you in mind when we designed our PM-2000 mixer. That's why this is the mixer that more than meets your performance expectations. And feels the way you want it to feel.

The layout is simple and uncluttered. Yet the PM-2000 is sophisticated, versatile, and rugged. It's been proven equally adept in broadcast and recording, both at fixed installations and on the road.

With 5-position, 4-band eq, and six independent sends on all 32 inputs (24 channels also available), plus a full-function 14 x 8 matrix, the PM-2000 has earned a reputation as the consummate console. Distortion and noise specs are as low as much more expensive studio consoles.

Write to P.O. Box 6600, Buena Park, CA 90622 for complete information. We're confident that the more you know about the PM-2000, the more you'll realize it's the mixer you have in mind. And the PM-2000 is available at select Yamaha dealers now. So you can have it in hand, right away.



Circle 167 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

# HOW RADIO OPERATORS GET A REAL LIFT FROM REVERB

---

***Artificial reverberation is helping a substantial number of radio operators to produce sound that will attract listeners and mark the station off from the competition. What some of those operators are doing with reverb, as related in this article, may suggest ways for others to improve sound quality.***

---

MONO VOICES that have a feeling of "space," for a better match with stereo music and automated music with close continuity that "covers" switching gaps, are just two of the gains from reverb that turned up in a survey of radio operations around the country.

The uses fall mostly into two classes: improving an on-air sound (recorded or direct) that is noticeably low in acoustic quality compared with adjoining material; and supplying a wide range of special effects in production, especially in production of commercials. Some applications do not fit either category exactly. But the classification is useful because it is likely to suggest additional uses for reverberation that may be important to radio operators, but not covered in this sampling.

Looking first at improving the quality of on-air signals, we note one typical situation. The announcer for a stereo music broadcast operates in mono, in a small separate booth or other acoustically dead space. The contrast between the voice and the music can be painful — the voice is small, dead, and unattractive.

Several of the reverb systems on the market will not only give the voice acoustic power, but also provide a kind

of "acoustic stereo" that seems to spread the space surrounding the voice. The quality will be much more attractive and will come reasonably close to the spread-out character of good stereo.

This applies not only to live concert pickups, but also to broadcasts from stereo recordings. The better stereo recordings carry their own acoustics, their recorded reverb, which gives power to the music. Against these recorded acoustics, a mono voice in a dry space can be ugly indeed.


A carefully adjusted amount of reverb on voice strengthens the radio sound in other situations. Some stations use reverb on all DJ mic inputs, setting the amount at the right level for each voice. This can be systematized to the extent of having a small plug-in device that sets the reverb and equalization to the best values for each voice. Each DJ carries a plug-in with him and puts it into the console before going on the air.

Of course, reverb is not just for voice. Stations airing a lot of music from mono carts are likely to be up against competition from FM stereo stations in the market. Even on mono receivers, the cart sound may be poor in comparison with that produced by FM stereo. On stereo receivers the difference can be sharp.


Again, reverb can help, with or without the "reverb stereo" effect (better with it, as a rule). Reverb on a recorded music channel adds a good simulation of acoustic power, but also makes the channel more "forgiving" of frequency weaknesses or bumps, noise, unevenness in levels. These and other technical faults are less obtrusive with well-adjusted reverb in the channel.

On WABC in New York, one of the most successful pop music stations in the country, a plate reverb system has for years functioned in a way that should suggest


## Artificial Reverb

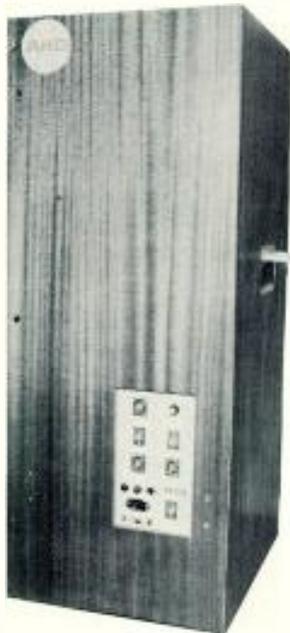

A modern spring reverb system, the AKG BX20E, has a multi-spring design and flexible controls to adjust frequency response, decay rate, and other parameters

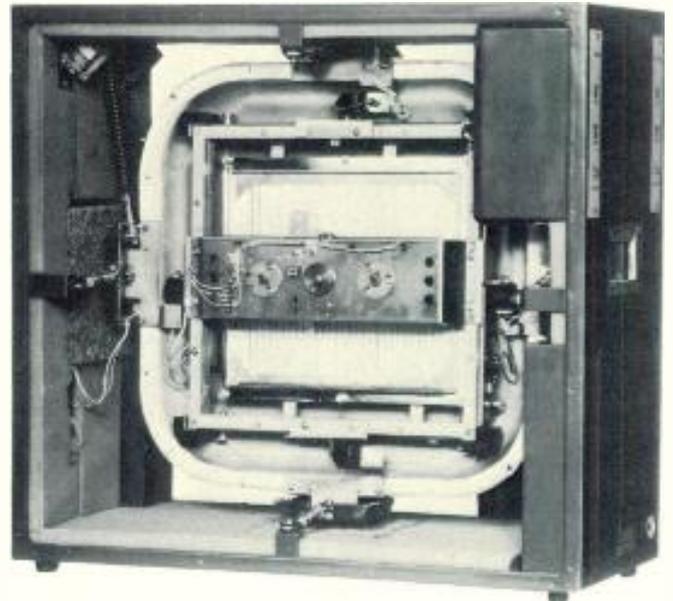

The "gold foil" plate reverberation unit, EMT Model 240, with back removed to show drive unit (left center) and elaborate suspension system to isolate plate from outside vibration

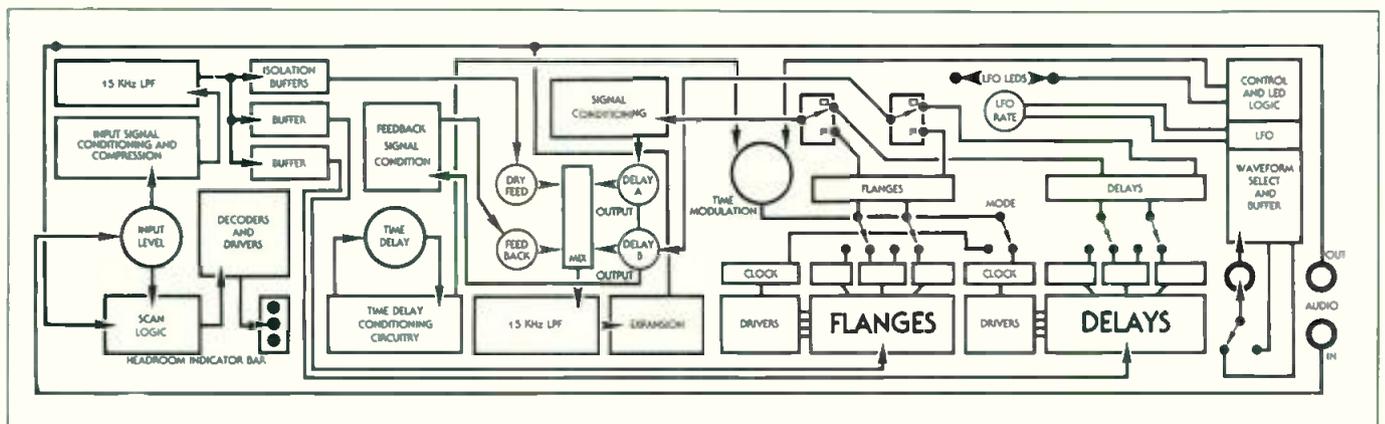

Simplified block diagram of one of newest delay-line systems, Marshall Model 5402, which supplies artificial reverberation as well as many special effects

another whole range of uses. To make the music sequences and announcements fit more tightly, reverb on all programs "spreads" the sound a little whenever it is abruptly cut off. Thus the sound tends to fill the switching "spaces." Even though these are short, WABC wants the more continuous effect of the reverberated sound. The plate system is well adapted to this, with its highly diffused "decay period" reverb that can be set to hang on for a wide range of periods.

The same approach to continuity could be useful in automation systems of various kinds, but more especially when manual switching involves a human reaction time. Near-total sound continuity is not paramount in every radio operation; but when it is, reverb can help substantially.

Mentioned in the first article of this series and worth repeating here is an important gain that many operators can draw from on-air reverb. It can make the sound seem louder without a corresponding increase in the power level. A station can take a step ahead in the loudness competition without increasing the actual modulation.

The strong revival of interest in music of the 30s, 40s, and 50s (see the Program Marketplace in this issue, p. 28, for a story on this) has opened up another area of usefulness for reverb systems. Recordings made before

1958 are, of course, all in mono. The stereo "space" that some of the current reverb systems supply can help tremendously, giving these old recordings a resonance that makes them sound fairly close to real stereo. Actual stereo instrument spread cannot be created if it is not on the recording, but the stereo sense of space can be pleasingly simulated. Reverb in this application seems to be another valuable tool in the radio competition of the present and future.

Remote pickup of voice and music from acoustically poor spaces is another large area in which artificial reverb can help strongly. On voice the gain can be much more than just additional resonance and power. Noise, poor frequency balance, and other well-known ills of long-line pickups can be made somewhat less offensive with judicious reverb at the receiving end.

Music at remote pickups will have a very wide range of acoustic settings, from classical concert halls to outdoor bandstands to tiny night clubs. Broadcasters usually try to get the concert hall character itself onto the line along with the music. This is a function of microphone technology, and those broadcasting classical music usually will not add artificial reverb.

The outdoor concert is at the opposite extreme; it has *no* reverb of its own, and the broadcaster may well want to

# INTRODUCING

## THE HAWKEYE'S EYE.

RCA's revolutionary new handheld HAWKEYE ENG camera was built around a revolutionary new RCA tube—the ½ inch SATICON\*. Its superior performance is the direct result of enlightened design techniques and the inherent characteristics of the Selenium-Arsenic-Tellurium photoconductor.

The SATICON tube offers outstanding resolution, and handles high-contrast scenes without unpleasant distortion or discoloration. Color pictures come through spot-free, without flare. For these and many other reasons, SATICON tubes are now used in over 50% of the new color cameras sold in North America and Japan.

On the basis of performance, reliability and general user acceptance, they

will soon predominate in color television cameras worldwide.

SATICON tubes are now available as new or replacement equipment for most ENG, studio and remote cameras. For more information, please write RCA Camera Tube Marketing, New Holland Avenue, Lancaster, PA 17604. Telephone: (717) 397-7661. Or RCA Brussels, Belgium. Sao Paulo, Brazil. Sunbury - on - Thames, Middlesex, England. Paris, France. Munich, W. Germany. Hong Kong. Mexico 16 D.F., Mexico.

Circle 168 on Reader Service Card

# RCA

\*Used by permission of trademark owner.

# The picture is worth a thousand words



## The Marconi Mark IXB Colour Camera

You don't have to look very far to appreciate why TV cameramen are behind the Marconi Mark IXB Colour Camera.

With an amazingly sensitive optical assembly giving pictures down to 50 lux, a new electronic package including head amplifiers and talk-back circuit coupled with a lightweight multi-core camera cable, small CCU and low power consumption, the Mark IXB is the star performer in every studio and outside broadcast role.

To put yourself in the picture, contact: John White or Simon Frazer

## Marconi Electronics Inc.

100 Stonehurst Court, Northvale, New Jersey 07647, U.S.A. Tel: 767 7250 Telex: 710-991-9752

Circle 169 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

## Artificial Reverb

add some. The reverb can make the music far more impressive and emotionally powerful.

In the average small night club, the first problem is often to get voices onto the line with a good margin above the noise. After that has been tied down, reverb may be useful. Every space has its own peculiarities. The pickup engineer needs ingenuity, perseverance, and a good ear, as well as excellent microphone technique and a feeling for what the station's artificial reverb system can do.

Science fiction programs can use extreme amounts of reverb, as well as the whole panorama of "special effects," which we are not considering in this article. Very long reverb of the right kind produces the "vast space" effect, now so familiar to moviegoers as well as radio listeners. Serious drama, slowly building on radio, is a most fertile area for creative use of reverb. A sense of distance, or of the difference between inside a room and outside, can be sharpened with the help of reverb; in dozens of dramatic situations, reverb can help create the scene.

### Commercials: reverb sells

A heavy majority of the radio stations *BM/E* found using reverb used it mostly to add excitement to the ads they produced. At KPLZ in Seattle, chief engineer Lauchy MacMillan reported that the station's MicMix reverb system had become a basic tool in ad production, making ads more impressive to clients and to listeners. The system picks up voices, puts in large space when it is appropriate, and gives the right character to music pas-


sages.

Steve Brown, chief engineer at WHBY in Appleton, Wisc. was similarly busy in ad production with the help of his Eventide Harmonizer. He noted that many ad clients want a "big" sound; others want a futuristic sound. The reverb system allows the production crew to satisfy all such demands and many others. A third, similar operation is that of WVJS-WSRO in Owensboro, Ken. Chief engineer Michael Fleming said his Ursa Major Space Station supplies a large array of different special effects for commercials. The Space Station setup of reverb simulating rooms of different sizes often proves useful.

Chief engineer Fred Moore at WYNY, New York, told *BM/E* that his new production studio, to open in mid-November, will include an AKG spring reverb system as basic equipment. This emphasizes a final important point. Although the electronic delay line systems have great flexibility, with the added virtue of supplying scores of special effects, if reverb only is needed the plate and spring systems should still be considered "alive." The better plate systems, as this series of articles has noted, supply an excellent decay-period reverb, with many random, well diffused reflections. The best spring systems come very close to this at a fraction to the cost of a top-grade plate.

The electronic delay systems are just moving into real competence in producing the randomness and diffuseness needed for smooth, convincing reverb. This takes very smart technology, and it is beginning to arrive. So the long future belongs here, in a price bracket well above that of the other kinds of reverb system. For smaller budgets the mechanical systems seem to have staying power. *BM/E*

**4 Models—8 and 10 mixer dual stereo with rotary or linear faders • Transformer Balanced Inputs and Outputs • 3 Inputs Per Mixer—internal pads allows mic/line selection on the same mixer • Two 4-Input Auxiliary Input Selectors—may be assigned to any mixer • Pre-fader Pushbutton Cue—in addition to normal CCW fader cue position • LED Status Indicators—color coded to aid in instant identification of function selectors • Momentary or Continuous Remote Control Contacts—internally selectable, also controls optional digital timer reset/start • Full Metering Capability—two meters standard, up to four meters and/or digital clocks and timers optionally available, all meters provided with LED peak indicators • Gain Selectable Microphone Preamps—provided with center tap access for phantom condenser microphone power, processor input/output port with buffer amplifier for outboard compressors, limiters, etc. • Programmable Muting Logic—internal pin-programmed matrix allows any selection of monitor and cue muting for the first five mixer positions • Pushbutton Aural Phase Test • Announcer's Microphone Intercom-Air Selector • Full Dual Channel Operation— independent program and audition assignment push-buttons • Five Monitor Driver Outputs—four muted, one non-muted • All Mixers Switch-Selectable to Mono or Stereo • Ground-Plane Techniques Used Throughout for Increased RF Immunity • Selectable Internal or External Master Level Controls • Accessories and Options—mono mixdown, high impedance (cassette) line input plug-ins, reference oscillator/line input plug-in, additional microphone input plug-ins, digital clock, digital timer, linear faders.**

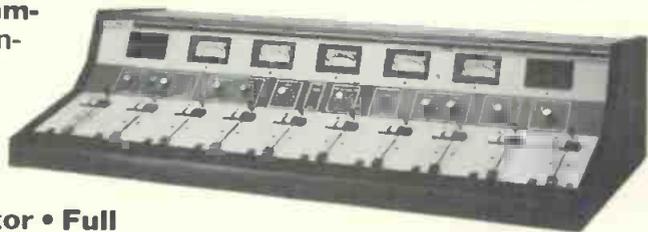

**LPB**<sup>®</sup>


**citation series** Everything you want in an audio console

LPB Inc. • 28 Bacton Hill Road • Frazer, PA 19355 • (215) 644-1123

Manufacturers and Distributors of Broadcast Equipment since 1960

© 1981 LPB Inc.

# The Quantel 1750 and 1550.

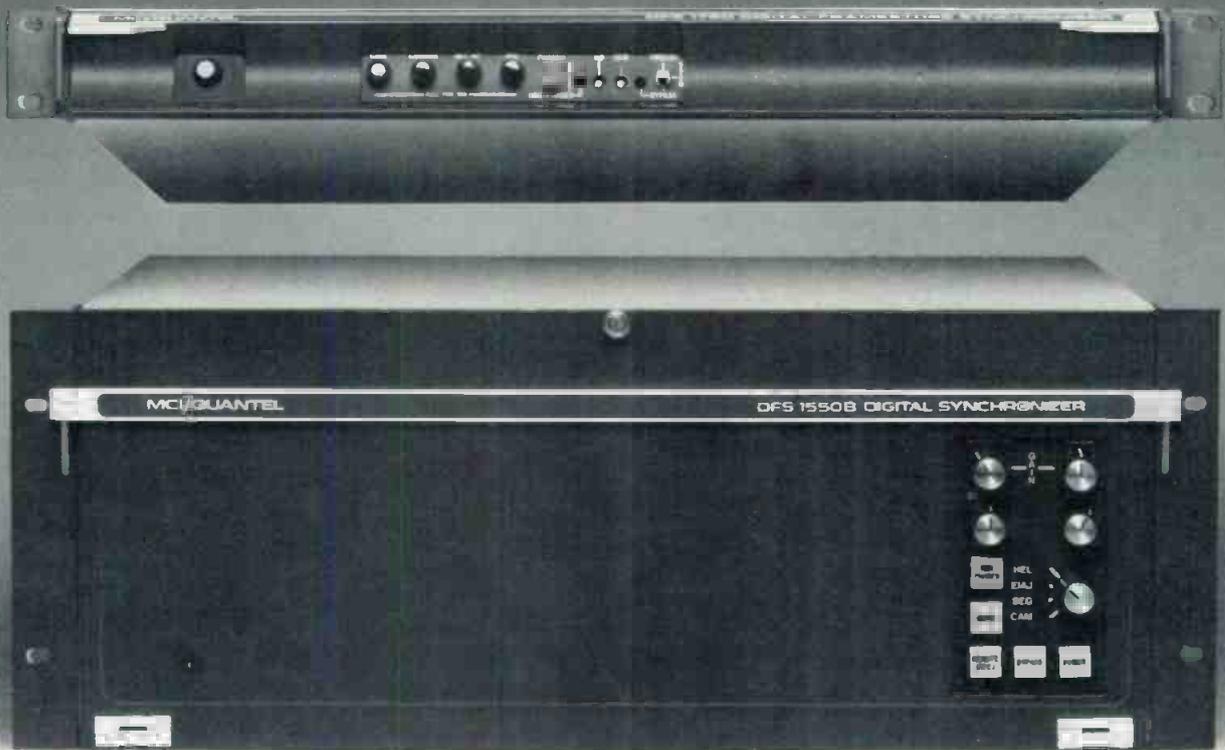

## Super Synchronizer. Super TBC. Have it your way

At 1 $\frac{3}{4}$  inches high, the new Quantel DFS 1750 is the world's smallest digital framestore synchronizer.

Obviously it occupies less rack space than any other unit. And weighs less. And consumes less power. But it does much more.

It has an infinite window heterodyne TBC, freeze, fast hot cuts, built-in reference signals and test circuitry, full proc amp controls, and a digital I/O interface.

Plus unique auto non-phased operation. If the DFS 1750 senses a non-phased input signal, it automatically activates its heterodyne system to ensure continuity of output. Without any operator intervention.

You can use the DFS 1750 not only to lock external video feeds, but on virtually every input to a switcher, effectively eliminating phasing problems.

If the DFS 1750 is the super synchronizer, the DFS 1550 is the super TBC.

It's a heterodyne TBC, a direct color TBC, and a synchronizer—all in one cost-effective package.

SuperTBC gives you most of the features of super synchronizer. Plus a few of its own. Such as unexcelled

hot-cut capability between virtually any source—sync or non-sync, phased or non-phased.

It also includes auto non-phased operation, drop-out compensator, and velocity compensator.

So whether you choose the super synchronizer or the super TBC or both, it's a super choice.

A call to your nearest MCI/Quantel dealer will get you all the details. If you don't have the number, get in touch with us directly at 415/856-6226. Micro Consultants, Inc., P.O. Box 50810, Palo Alto, CA 94303.



**MCI/QUANTEL**  
The digital video people.

## Satellites And Computers Star At RTNDA

AS WITH PAST RTNDA Conventions, this year's gathering in New Orleans (September 10 through 12), featured the same chicken-and egg debate over which controls the industry — technology or journalism. But unlike last year where all the discussion of technology was confined to the exhibit floor, this year's convention seemed to embrace technology like a long-lost relative. Two evening sessions on news computers were packed, and an overflow session on satellites caused so much comment that RTNDA attempted to put together a second session.

In addition, the reporting of weather, with its increasingly sophisticated graphics and computer simulations drew attention in a session and on the exhibit floor.


In fact on the exhibit floor, the booths that dealt with weather graphics and newsroom computers got heavy traffic. Several new companies have swelled the number of vendors hawking weather systems and newsroom computer functions. A few of the newcomers were offering scaled-down versions for less money.

### Camera ware

RCA was the only camera manufacturer showing a one-piece camera/recorder. Unfortunately, many news directors were under the mistaken impression that the Hawkeye system is not compatible with the U-Matic and one-inch formats and with other manufacturers' edit controllers. RCA demonstrated the playback and record unit with a Sony BVE-500A controller. RCA, in fact, had the interface for the Sony controller ready before the Hawkeye introduction at Las Vegas in April. Shortly after NAB, CMX/Orox, Datatron, and Convergence made commitments to build interfaces for their controllers and the Hawkeye playback unit.

RCA also has an interface for its own AE 800 editor, along with a composite video converter that allows existing ENG cameras to record with the Hawkeye portable recorder.

With all this versatility, some news directors were unaware of Hawkeye's compatibility. For instance at a meeting of the CBS affiliates there were loud

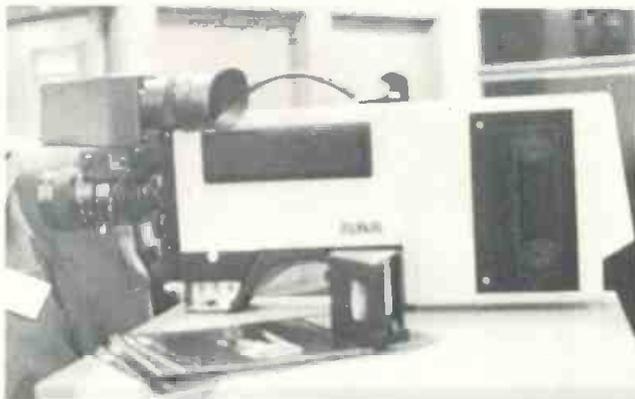

*The RCA Hawkeye camera/VTR sparked a lot of interest on and off the exhibit floor*

*Newsroom computers and weather graphics systems continue to be popular among news directors.*

*McInnis-Skinner & Associates markets both a news computer and a weather system*



### The Professional's Choice in Wireless Microphones

- Wide frequency response
- Low noise and distortion
- Latest companded technology
- Built-in level indicator
- VHF high band for less interference
- Attractive, non reflective finish

 **Cetec Vega**

Division of Cetec Corporation

P.O. Box 5348 • El Monte, CA 91731  
(213) 442-0782 • TWX: 910-587-3539

Circle 171 on Reader Service Card

## NEWS FEATURE

complaints about the apparent push to change ENG formats. Moreover, during an RTNDA business session, a resolution reached the floor asking the organization to oppose formally the introduction of a new format. The resolution was soundly defeated, but as one industry observer noted, "it's not an engineering problem with the one-piece cameras — it's a communication problem."

*BMIE Senior Editor Stephen Miller explained the history and probable future of news computers to RTNDA members at the first of the computer workshops*



### Speakers address variety of topics

Another interesting change from last year's convention was the tack taken by the luncheon speakers. There was little

of the technology-is-getting-away-from-us rhetoric. Richard Wald of ABC went so far as to say that the networks have stolen ideas from local stations on the look and feel of newscasts, while at the same time disdaining the contribution of local news. Wald's main thrust was for more, not less, competition in news. He complained, however, about what he termed "terminal perky-ness" from some local newscasters. He thinks that the content sometimes gets lost.

Lem Tucker of CBS news gave this year's "mea culpa" speech, offering the assembled broadcasters something to feel guilty about. Tucker came as a substitute for his colleague Ed Bradley. "Being a halfway smart reporter . . . I think I know what they want me to talk about," Tucker admitted. He pointed out that while strides had been made in putting minorities in front of the camera, few minority persons were in decision-making positions such as news director.

The star of the speakers was Walter Cronkite, who was receiving his second Paul White Award. Cronkite expressed concern about some of the sloppiness that he saw running through the journalistic community with the too-frequent use of unnamed sources. He told the news directors that they should be more diligent in keeping comments on the record and with attribution.

### Satellites an "up" topic

The two technical sessions that got the most interest from the RTNDA members were those on satellites and newsroom computers.

The satellite session was filled to overflowing, indicating the intense interest in the application of satellite technology in news gathering. All the panelists agreed that satellites were enormously useful, but most of the users felt that it was difficult for a news department alone to justify the cost of an earth station.


Jack Gallivan of KUTV-TV, Salt Lake City, said, however, that his station's dish gets a daily workout. A daily feed comes in from the station's Washington, D.C., bureau, opened early this year. The dish also takes in frequent feeds from around the world as the station covers the activities of the head of the Mormon Church. Those feeds have come from as far away as Israel. The programming department also brings in

## ALEXANDER BATTERY PACKS. THEY'LL TURN YOU ON.

If you've ever been on location with portable cameras or VTRs, you probably know the frustration of a dead or defective battery pack. You know what it can cost in wasted dollars and man hours and missed stories and deadlines. Now Alexander Manufacturing can end all that with their line of quality nickel

cadmium rechargeable battery packs.

Alexander's line includes recorder and on-camera units, all unconditionally guaranteed for six months. Plus we have developed the most reliable 10-hour chargers available anywhere. Ask for our catalog, "Batteries for Television".

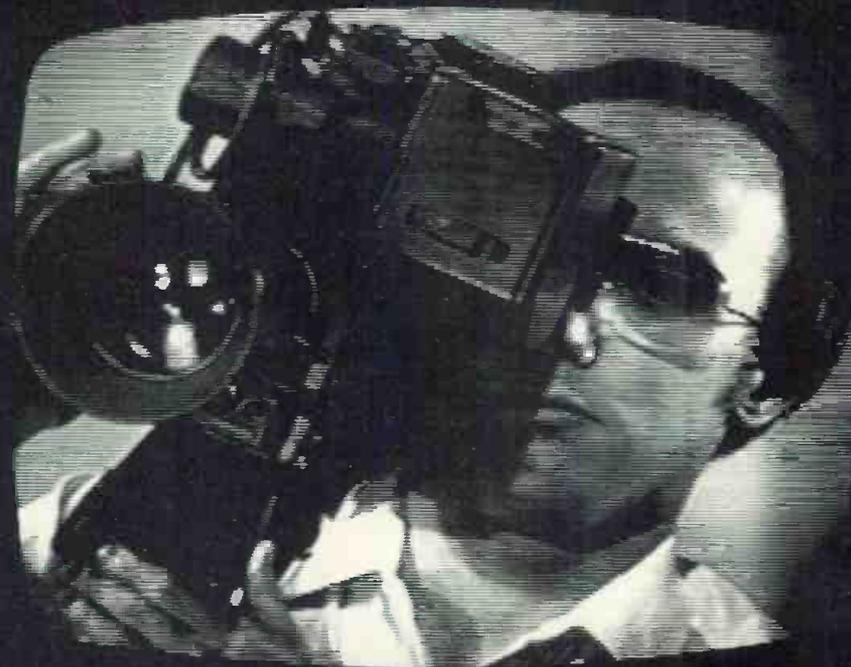

 **ALEXANDER**  
Alexander Manufacturing Co.  
1511 So. Garfield Pl.  
Mason City, Iowa 50401  
515-423-8955

Circle 172 on Reader Service Card

# World's first field Production system with automatic camera phase control from ASACA

The ASW-100 and ASW-100N is completely self-contained portable field production system requiring only connection of cameras for full operation. System components connect together quickly and easily.

The system provides full monitoring, switching, camera control, tally, and intercom facilities up until now available only in production Van or Studio Operation.

- Vertical interval switching with mix-fader and 12 special effects.
- Fully automatic sub-carrier phasing accurate to  $\pm 2$  degree within 360 degree range. Sync timing is also automatic. (patent pending)
- Camera controls including iris, master pedestal, R. B. gains, R. B. pedestals, and tally. Control modules are available for most popular ENG/EFP cameras widely used.
- Video monitoring for sources and line out put, and line wave form monitoring.
- Built-in audio mixer with compressor circuit. (ASW-100N only)
- Built-in sync generator with gen-lock to black burst.
- Cable compensation up to 1000 ft. (300 m)
- VTR control start, stop, record.
- Downstreamkeyer for use with titler. (ASW-100 only)
- DC 12V or any AC outlet.



AMB-100N

ASW-100N



ASW-100

AMB-100

The ASACA logo, consisting of the letters 'ASACA' in a bold, stylized, blocky font.

**ASACA CORPORATION OF AMERICA**

**Head Office 1277 Rand Road, Des Plaines, Illinois 60016, Tel. (312) 298-4380**

**155-B San Lazaro Ave., Sunnyvale, California 94086, Tel. (408) 735-7350**

Circle 173 on Reader Service Card

## NEWS FEATURE

some syndicated material on the dish. When the dish is not being used by other departments, the news department monitors Cable News Network.

Gallivan says the dish is in such demand that KUTV is "about ready to go to a second dish."

Dick Mallary of WSB-TV, Atlanta, expressed concern that satellite technology may be "ahead of our ability to use it well."

Because of the popularity of the satellite session, RTNDA officials unsuccessfully attempted to schedule a second session before the convention ended.

### Newsroom computers a big draw

They didn't have that problem with the session on computerized newsrooms. The group planned from the beginning for two evening sessions of two hours each. Both sessions drew full houses, even though the first night's session had to compete with the ABC affiliates meeting.



Larry Cooper, CBS Radio, explained to the overflow crowd his experience with a news computer at KCBS

## COMSEARCH WILL CLEAR THE WAY...

for Satellite Earth Station and Terrestrial Microwave Systems with our wide spectrum of communications engineering services:

- Satellite earth station Interference studies and site selection
- RFI measurements
- Terrestrial frequency planning (for common carrier, private, CARS and STL microwave)
- Path survey
- Coverage patterns for MDS
- Consulting services
- Low power broadcast TV
- Radiation hazard testing
- RF MIL-standard testing
- Computer time-sharing

# COMSEARCH

INCORPORATED

7633 Leesburg Pike/Falls Church, Virginia 22043  
Contact: Harry Stemples, President  
703/356-9470

The general tenor was that the computer will be a news room fixture. Howard Kelley of Harte-Hanks Communication opened the first session by telling the group, "it's not a question of if you will computerize but *when*. If it's not cost-effective now, it will be. It may not be a competitive advantage now, but it will be — and sooner than you think."

Stephen Miller, *BM/E* senior editor, predicted, "The quality of reporting and production that will be available to those who use computers properly will be lightyears ahead of the competition."

Bill Ballard of Jefferson Data Systems explained that computers will drastically alter the way broadcasters do business. Those that understand this will survive, he said, "but broadcasters who see computerization as just another gadget will not."

Ron Hudson of McInnis-Skinner Associates pointed out that a background in computers is not necessary for the wise choice of a system. "How a system does what it does," said Hudson, "is not nearly as important as the fact that it does what you need it to do."

At the second session, Larry Cooper of KCBS Radio, San Francisco, gave a compelling argument for a computer in the newsroom when he related the story of how his station was able to get on the air a full five minutes before the network with news of the attempt on President Reagan's life. Cooper said his anchor was able to read the bulletin off the terminal as soon as it came off the wire because he didn't have to wait for someone to write hard copy.

One function of the second panel was to answer many of the questions raised at the first session. George Pupala of Station Business Systems was able to prepare a detailed list of arguments to support the value of a newscomputer. The list was made available to any news director who visited the SBS booth — printed out of course, the firm's newscomputer.

### Jazzing up the weather

Interest is still intense in ways to jazz up weather reports. To fill that appetite

Circle 174 on Reader Service Card




# DIGITAL

## VIDEO SYSTEMS

### DPS-1 TIME BASE CORRECTOR

# \$16,430

Trade in your old TBC. Allowance up to \$4,000.

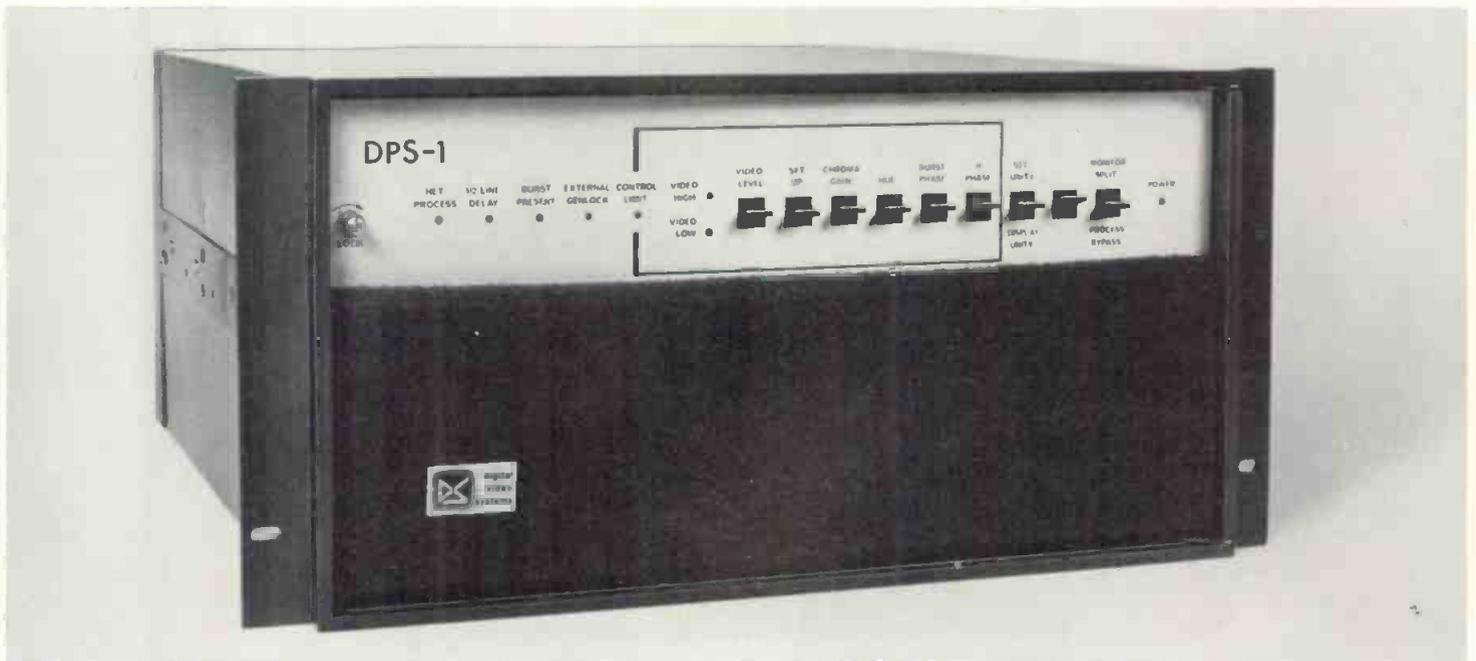

**Fixed 32 line window for precise vertical blanking.**

A fixed window is used instead of a floating window which results in faster lockup without vertical hunting.

**Digital burst processing.**

Used to provide line by line clock phase correction accuracy to 0.5 nanoseconds.

**Digital servo.**

Eliminates horizontal cycle hopping.

**Digital velocity compensator.**

Corrects velocity errors on a line by line look ahead basis to provide highest quality color pictures.

**Adjacent line drop out compensator.**

Full bandwidth correct color signal from the previous line is inserted to replace the dropout portion of the active line.

**Internal test/calibration generator.**

System throughput is checked and tested by comparing one of eight selectable Digital Test Signals switched from output to throughput every 32 lines providing an A/B picture comparison.

**Digital RS 170A PROC AMP.**

Converts all normal incoming NTSC Signals to RS 170A Standard, facilitating color frame editing.

**Passes VITS and VIRS.**

Full bandwidth capability and precise digital blanking ensures that VITS and VIRS are passed without degradation.

**Modular interchange facilities servicing.**

Price includes delivery, set-up and instructions and manufacturer's warranty.

This offer is subject to withdrawal without notice.

Call  
(215) 223-8200

**LERRO**  
ELECTRICAL CORPORATION  
COMMUNICATIONS SYSTEMS DIVISION  
3125 North Broad Street, Philadelphia, PA 19132

Ask for  
Jim Holly

Leading the way in the DIGITAL Decade

Circle 175 on Reader Service Card



The Original

# We'll Repair,



# Rebuild,



# & Restore



## Your Battery Belt or Pak ... In as Fast as 24 Hours

Original Parts,  
Original Equipment  
... Since 1960

# CINE 60

630 Ninth Ave.  
New York, N.Y. 10036  
(212) 586-8782

6430 Sunset Blvd.  
Hollywood, Ca. 90028  
(213) 461-3046

TWX: 710-581; TELEX: 645-647

Circle 177 on Reader Service Card

## NEWS FEATURE



The number of companies marketing weather graphics systems increased by 60 percent

an increasing number of companies are getting involved in the marketing of weather systems. At last year's convention, five companies displayed their systems. This year, there were eight.

Arvin/Diamond made its first appearance at RTNDA to show off its new Sat-Weather 3 system. The system accepts digitized weather information from NOAA and processes it into a color video weather display. Arvin/Diamond announced that it has begun shipment of the Sat-Weather 3 system to a number of stations.

Synsat Communications, familiar from previous RTNDA shows, this year introduced a low-cost weather system. This system takes the NOAA information directly from the satellite via a two-meter dish. The system can only furnish a black and white picture with cassette storage, but John Uldrich stressed that the system is for those stations in the smaller markets that can't afford the more expensive colorized systems. The Synsat system costs about \$7000.

A newcomer to RTNDA was Weathercaster, which previously made its first appearance at this year's NAB. The company's system actually forecasts weather based on past history of the region and remote sensors placed at various points in the coverage area. The dual processor system has one computer to handle the incoming information while the other processes the information for on-air display.

Other weather services on exhibit were Colorgraphics, IPS, TSC, WeatherGraphics™, and Weathermation.

### Newsroom computer services

Added to the current news computer systems were several companies that offered some aspect of computer services for newsrooms, but fell short of full-blown systems. The most intriguing new vendor was McHugh and Hoffman, of news consultancy fame. McHugh and Hoffman did not exhibit

on the floor, but showed their new Master news computer system in a suite.

The system is designed for first entry into the news computer field and handles simple housekeeping chores, such as cataloging stories, videotape, slides, artwork, and lists of area schools for use during snow emergencies.

The Master system uses an Apple II Plus microcomputer and, with the McHugh and Hoffman software and one day's on-site training, costs \$5000. Following the show, McHugh and Hoffman announced that they will make the software available for those stations that already have Apple II Plus microcomputers for \$2000.

Integrated Technology did not exhibit either, but several of its customers were in New Orleans so the company used its suite to show its new terminal, which will be installed at WRC Radio by the time this is published. One of the plusses of ITI has been its speed of retrieval. The new terminal has been redesigned to cut down on keystrokes, reducing even further the time it takes to perform some functions.

Basys announced that it has been awarded the contract to computerize CNN's second network. The company also said it had made its first international sale and will be furnishing a system for ITN in London.

A surprising exhibitor was News-game, a promotional device for news departments. Newsgame is a board game in which the players pretend that they are reporters in the field charged with the responsibility of covering four news stories, with all the pitfalls, and getting back to the station first.

The game is customized with the station's talent and logo and is promoted for sale in local stores with the profits going to charity. WKBW-TV, Buffalo, N.Y., used the game last year and sold 8000 in two weeks. The proceeds, over \$30,000, went to a local children's hospital. **BM/E**



## Maxell gives you the professional advantage.

If your professional or business requirements call for the regular use of blank audio or video recording tape, you can't afford to lose production time because of inferior products. As a matter of fact, you need the kind of tape that consistently provides you with *all the advantages* of performance and durability you depend on for professional results. We call it *The Professional Advantage*, and at Maxell we are dedicated to giving you *just that*, with every audio and video tape we make.

Our magnetic tape products employ highly sophisticated formulations that reproduce original source material with exceptional accuracy, whatever the application. Our binder system and processing techniques assure that what you record, you keep—without dropouts, shedding, print-through or distortion.

Our superior cassette shell technology provides the precision necessary for smooth and quiet tape transport without slipping or jamming.

We make it our business to manufacture high quality products that give you every advantage. You'll get the professional results you demand, the first time and every time you use a Maxell audio or video tape. To discover more about Maxell's professional advantages, call one of our Regional Sales Offices: Eastern Office, Moonachie, NJ (201) 440-8020 ■ Midwestern Office, Glenelg, IL (312) 469-3615 ■ Western Office, Los Gatos, CA (408) 395-1998

**maxell.**  
PROFESSIONAL  
INDUSTRIAL  
PRODUCTS

**The Professional Advantage**

Maxell Corporation of America  
60 Oxford Drive, Moonachie, NJ 07074

Circle 178 on Reader Service Card



# Broadcast on a budget

The Ikegami ITC-350 keeps harsh economic realities from interfering with high quality program origination. It has the inherent advantage of three tube prism optics and Ikegami's high standard of quality, all for a surprisingly low price. A manufacturer's list of only \$11,400, completely ready to go with  $\frac{2}{3}$ " Saticons\* and accessories (less lens and microphone). And it's the only camera in this price range to offer Plumbicons\*\*, for just slightly more.

The ITC-350 consistently delivers quiet, high resolution pictures with excellent colorimetry. And, with its f/1.4 lens and up to 12 dB of added video gain, it can produce low light level pictures superior to any camera in its class. What's more, all of the basic operational features and automatics you'd expect from Ikegami are built in.

And, the ITC-350 is versatile. It could be the only camera you need to cover fast-breaking news, manage field production, and handle studio origination. Its light weight (13 lbs. with battery and viewfinder) and low power consumption (15W) make ENG applications a natural. Add an optional CCU and 5" viewfinder (both powered from the camera battery) and you're ready for EFP Studio use in minutes.

Best of all, the ITC-350 is establishing a very solid record for reliability. That could be why it's making beautiful pictures for a rapidly growing number of budget-minded broadcasters. See how well the ITC-350 fits into your station and your budget.

## Ikegami

Ikegami Electronics (USA) Inc., 37 Brook Avenue, Maywood, NJ 07607; (201) 368-9171  
 Northeast: (201) 368-9171 | West Coast: (213) 534-0050 | Southwest: (713) 445-0100 | Southeast: (912) 924-0061 | Canada: (201) 368-9179

Registered Trademark of Hitachi | Registered Trademark of NV Philips | Shown with Fujinon 10X lens

Circle 176 on Reader Service Card

## NRBA: Network Star Wars

MUCH OF WHAT went on outside the formal sessions at this year's NRBA in Miami Beach could be summed up in one word — satellite. Every program syndicator worth his weight in transponders was hawking a radio format distributed by satellite, and because of the distribution system, each was portraying itself as a network.

The other topic of hallway conferences, which did come out at one of the sessions, was how to take advantage of cable. Unlike most television broadcasters, the radio broadcasters saw an opportunity to use cable as a way of expanding the marketplace.

During a session entitled, "How Radio Will be Changed by New Technology and Services," the panelists agreed that cable was not going away and that those broadcasters who took advantage of it could prosper. Kent Burkhart of Satellite Music Network said that cable has the potential to bring in distant signals and increase

competition in the market. The main thrust of the panel seemed to be that cable and satellites can alter the face of radio while at the same time offering new opportunities for those broadcasters who prepare for it.

The satellites are bringing radio stations greater access to program sources than ever before. At this year's convention there were, according to one source, 16 companies offering 29 network services, and those that weren't on satellite soon would be. At last year's NRBA the number of networks available on satellite could be counted on one hand.

Even though satellite networks are booming, transponder space is still a problem. The new launchings this year and in 1982 should ease the situation.

### Sessions cover familiar ground

Digital audio, audio processing, and satellite technology were the main topics of the engineering sessions, which



*The number of exhibitors was down slightly this year, but many said that traffic on the floor was up*



*Processing Plus made its first appearance at NRBA with a low-cost audio processor*



**SONY**  
*Wireless Microphone*



*Eastern Acoustic Works, Inc.*



MAIN DEALER IN THESE  
AND MANY OTHER  
FINE LINES  
COMPLETE SYSTEM DESIGN  
AND INSTALLATION.

**HARRIS AUDIO  
SYSTEMS, Inc.**

1962 N.E. 149 St., N. Miami, Florida 33181

(305) 944-4448 **SOUND EAST**

Michael Harris

## NEWS FEATURE

for the most part covered familiar territory.

In the panel on digital audio, the discussion continued to center around the various approaches for proposed standards. Despite lengthy explanations concerning the work of the various SMPTE and AES committees, there was no agreement on when a standard would be reached.

The audio processing panel did come up with one interesting consensus on

what would give a station better sound: cleaning up the signal path of the station from top to bottom. According to Bob Orban, "Cleaning up the system is as important as any kind of processing."

Ed Buterbaugh, director of engineering for CKLW, did come up with a reason to go for a better quality of sound, other than the program director's wish for more "thumps." Buterbaugh said that cleaner sound was causing his station's listeners to stay with the station longer, boosting their rating from a 2.5 to a 4. He said the rating rise could be directly traced to better engineering. It seemed to be the



Bill Clark, president and general manager of KABL, San Francisco, was elected NRBA board chairman. Clark replaced Bob Herpe who retired after holding the post for seven years

## Case History #437

Electronic News Gathering is one of the toughest environments a microphone will ever encounter. Every mike we've seen has com-

promised the demand for low handling noise, fine audio quality and virtual indestructibility.

Credit the NBC Electronic Journalism Department/Operations and Engineering in New York for putting the Electro-Voice DO56 shock-mounted omni in the field. Although originally designed as an on-camera entertainment and MC's microphone, NBC found the DO56 to be the microphone that provides an audio signal commensurate with video in real-life crisis situations. In these situations audio often takes a back seat to video,

### Electro-Voice DO56 Shock-Mounted Omnidirectional Microphone

pushes, the shoves, the rubs and finger taps in stride. And when handling *really* gets rough, the DO56's unique internal shock mount virtually eliminates the bell-like clang transmitted by other shock-mounted mikes.

Congratulations to the NBC Electronic Journalism Department in New York. You found the solution – the DO56.

For an in-depth description of this and other case histories, get on the Electro-Voice "Mike Facts" mailing list. Write on your letterhead to Mike Facts, c/o Electro-Voice, 600 Cecil Street, Buchanan, MI 49107.

resulting in a final product that doesn't accurately reflect the broadcaster's professional standards. NBC discovered that the DO56 takes the

 **Electro-Voice**  
a gulton company



Circle 180 on Reader Service Card

first time that someone other than programmers could take credit for higher ratings.

The satellite session also covered familiar ground, but in the face of the huge number of programmers offering satellite-delivered formats, it had a greater interest. One recommendation that came out of the panel was the possibility of the stations in a market pooling resources for an earth station to cut down on individual costs.

### Programmers up, exhibitors down

With the NAB programming conference preceding NRBA by less than a month, the number of exhibitors at this year's conference was slightly less than last year.

Processing Plus, a new exhibitor at NRBA, unveiled a new tri-band audio processor called the IMP-3. The voltage-controlled amplifier (VCA) design seems to offer, if the specs are as good as the company claims, a good buy at \$2250.

arris Corp.'s Broadcast Products Division introduced a powerful text editor and word processing option to its Autotron™ Star business system. The advantage to current users of the system is the new option makes full use of the existing database to upgrade without going to separate word processors.

McMartin Industries introduced a new IF demodulator for microwave and satellite reception. The SPR-3 claims to track transponder frequency error of up to ±40 kHz with a frequency range of 52–88 MHz.

Broadcast Audio Corp. showed a new compact amplifier with excellent specs that takes up one rack space. It comes in dual and quad 35 W models.

# The new, advanced Philips LDK14S

**new performance...new features**

Automatics... more than any other EFP camera.

The best EFP camera design for studio and triax conversions.

The LDK14S will outperform any EFP camera on the market today with features and performance that have evolved from the world famous LDK5, ABC's Olympics camera.

Compare it with any EFP camera you are using or considering.

See why it excels in...

- picture quality,
- operating features,
- flexibility, and value.

Call or write today.

Philips Broadcast Group  
Central Dynamics Corporation  
900 Corporate Drive  
Mahwah, NJ 07430  
201-529-1550  
Central Dynamics Ltd.,  
Montreal, 514-697-0810.



LDK14S in studio and field mode. Digital techniques in the camera and base station (RCU) require *only* an adapter for triax conversion... another LDK14S cost advantage from the originator of triax... Philips.



**CENTRAL DYNAMICS CORPORATION**

The U.S. Broadcast Company for  
**COL ■ PHILIPS ■ American Data**

Circle 181 on Reader Service Card

Audio Technologies, Inc. (ATI), showed its Emph'a Sizer, introduced at NAB, but had production models at NRBA and was geared up to make normal deliveries.

Delta Electronics Inc. featured its RCS-1V remote control system. The company said that it was in the process of delivering nearly 20 of the systems and was beginning its second production run.

*Most of the panels drew large and attentive audiences. This year's convention attracted 4000 persons*



The GVG 3240 processor  
**Restores original composite video**  
 everywhere it's used!



The new 3240 Video Processor system provides full sync and blanking regeneration with SC/H phased outputs that comply with RS170A standards.

Eight video controls, including video gain, chroma gain, burst phase, burst level, and soft and hard clips, provide complete control of your video signal.

To suit the individual user's needs, nine options are available, such as VIR and video AGC, linearity corrector, external reference, and remote controls.

The GVG 3240 gives absolute control needed for the cleanest pulse and video output. . .continuously recreated to highest broadcast standards.

## THE GRASS VALLEY GROUP, INC.®

P.O. BOX 1114 GRASS VALLEY CALIFORNIA 95945 USA

No entirely new products graced LPB's booth, but the company is offering its Citation series audio consoles with optional slide attenuators.

The syndicators who were offering satellite networks as a means of distributing their products seemed to please many broadcasters with the abundance of available options.

Satellite Music Network (see *BM/E*, September, 1981 p. 23) seemed to mount the biggest offensive for the attention of the attendees. A dish in the parking lot brought in a live broadcast of SMN's Country format from Chicago, as well as continuous messages on the hotel's closed circuit television channel.

CBS's new contemporary network, RadioRadio, is geared for the 17 to 34 year old market. The service, which goes on satellite in 1982, will feature a two-minute hourly newscast. The news will be aimed at the younger listener but will be backed by the expertise and prestige of CBS News.

RKO was pleased that it could offer the conventioners samplings of RKO Two, which had gone on the air two weeks earlier. RKO Two offers news, sports, and features geared to the 25-54 year old audience. It also offers the all-night talk show, *America Overnight*.

United Stations Country Music Network (US) was introducing itself with the help of one of its partners, Dick Clark, who spent much of the convention posing for pictures with anyone who came by the suite. US is a partnership of Clark, Nick Verbitsky, Frank Murphy, and Ed Salamon. Verbitsky and Murphy joined the company after successfully programming WHN, New York City's first Country music station. US plans to satellite a 24-hour, seven-day, stereo Country format.

ABC Radio Enterprises featured its two new satellite services, Talkradio and Superadio. The first is self-explanatory; the second is a 24-hour contemporary music format. Both will be distributed live.

Continental Radio (*BM/E*, September, 1981, p. 23) featured its Adult Contemporary format, which is available via satellite. **BM/E**

Circle 182 on Reader Service Card

Before there was  
LPTV, there was  
low-power television.

# There was EMCEE, too.

In 1960, before there was LPTV, there was low-power television translator service. And EMCEE® Broadcast Products television translators.

Today, LPTV joins translator service as a significant force in broadcasting. And EMCEE remains a leading supplier of equipment for both these services.

In translators to improve coverage and revenues.

In transmitters for new LPTV installations.

And in complete turnkey systems for either service. Supported by the design proposals, documentation and hands-on control provided by the EMCEE Applications Engineering Department. And implemented by the EMCEE Field Engineering Department.

Broadcasting has changed over the past twenty-one years. The EMCEE commitment to low-power television technology has not. This commitment is your assurance of reliable performance for your station. Whatever your requirements.


**It's not just how it works.  
It's how long it works.**



## BROADCAST PRODUCTS

a division of  
**ELECTRONICS, MISSILES & COMMUNICATIONS, INC.**  
P.O. Box 68  
White Haven, PA 18661  
Call toll-free: 800-233-6193  
(In PA: 717-443-9575)  
TWX: 510-655-7088  
Ans: EMCEE WHHV

® EMCEE Broadcast Products  
© 1981 EMCEE Broadcast Products

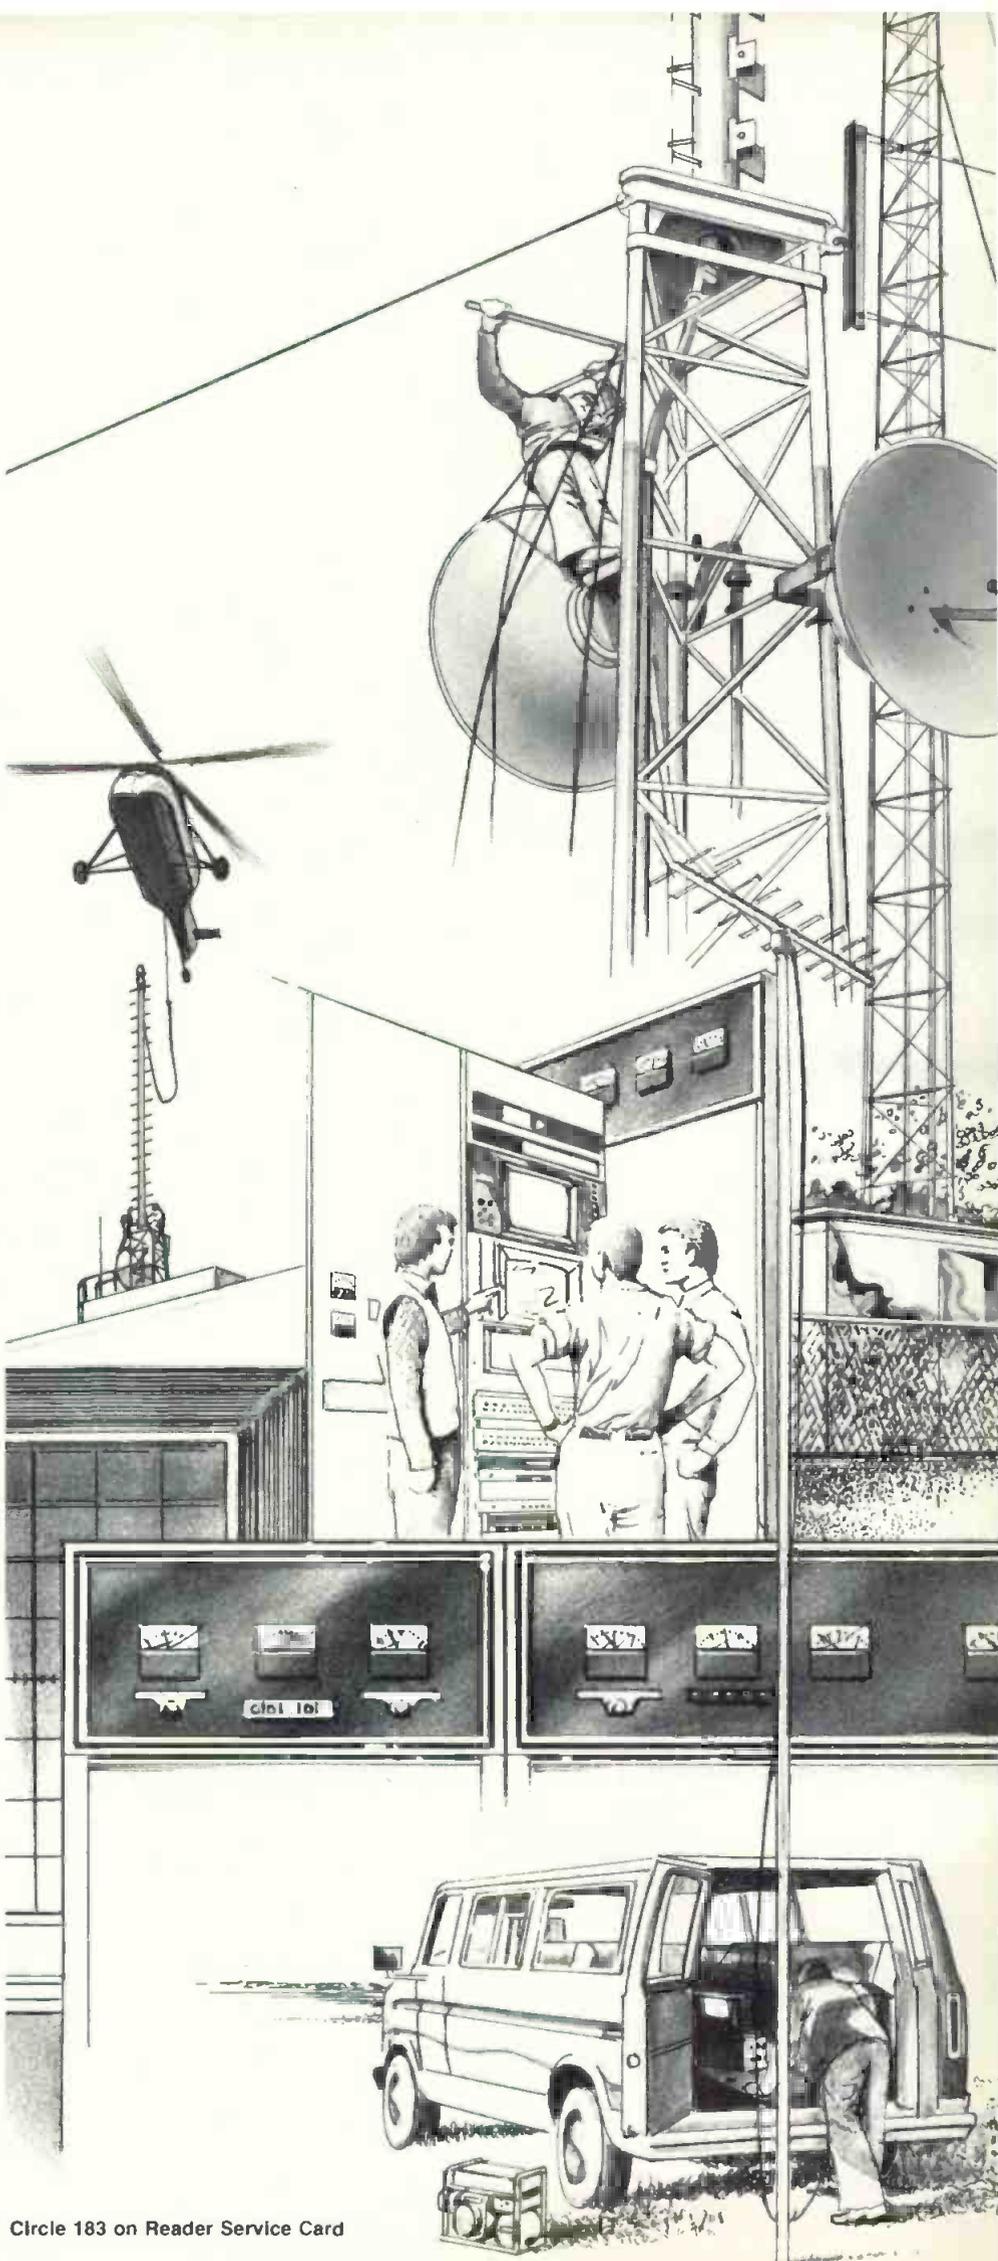


Circle 183 on Reader Service Card

# RELIABLE VIDEO AIDS from

**VAC**

A  
Standing  
Ovation  
for  
Great  
Performance

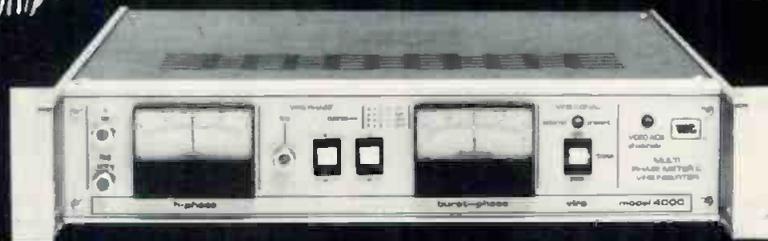

## THE MODEL 4000 MULTI-Ø & VIRS Ø METERS

This unit is both a production tool and engineer's instrument. It can be substituted in place of a vectorscope when measuring VIRS-phase and Burst-phase errors. The Model 4000 is an ideal replacement for most oscilloscopes where H-phase errors need to be observed and measured. In addition to displaying H, Burst, and VIRS phase on lighted meters, VAC's Model 4000 can generate and add VIRS to line 19 of each television field.

Call for the number  
of your local dealer:  
(303) 443-4950

**VIDEO AIDS OF COLORADO**  
1930 Central Avenue · Boulder, Colorado 80301

# GREAT IDEA CONTEST

Just one month remains in the 1981 Great Idea Contest. ENTER NOW. You may have the idea that every broadcaster has been waiting for – and if you do, you could win your own programmable calculator.

Editor's Note: Before attempting to implement any Great Idea involving the modification of equipment, station personnel should check with the equipment manufacturer to insure that no violation of warranty will occur.

If the Great Idea involves any technical standards governed by the FCC, stations should make sure that the idea will in no way cause a violation of FCC rules.

## 25. Editing Tape Directly To Cart

Marshall P. Brown, Chief Engineer  
KCEE-AM, Tucson, Ariz.

**Problem:** The KCEE news department needed a fast way to edit tape directly to cart, without splicing. It was important that any modifications not interfere with normal operation of the ITC PD-11 recorders.

**Solution:** The simplest way to edit on cart is to have a method of starting and stopping the cart, in the record mode, without recording undesired cues. This is easily accomplished with the PD-11, and should generalize to other models and makes. All that is required is shorting the slider contact of R-317 on the oscillator PC board to ground. This reduces the cue oscillator output to zero and allows the recorder to be started without placing a detectable cue on the tape.


The physical modification is simple and quick. Remove

the plate at the rear of the machine that covers the transformer and PC board. Remove the oscillator board and note that R-317 is the top component on the right when viewed from the foil side with the connector to your left. The trace that leads up and to the right from the leftmost pin of R-317 is ground, and the center terminal is the second point of interest. Route the cable from these two points along the foil side of the board, under the top support bar, along the side of the pinch roller solenoid to the front of the machine.

Although the placement of the switch is not critical, I mounted ours just in front of the "cart inserted" micro-switch with a couple of drops of epoxy cement. One note

**VOTE NOW!**  
**Ballot On Reader Service Card**

Brown's idea for editing on cart

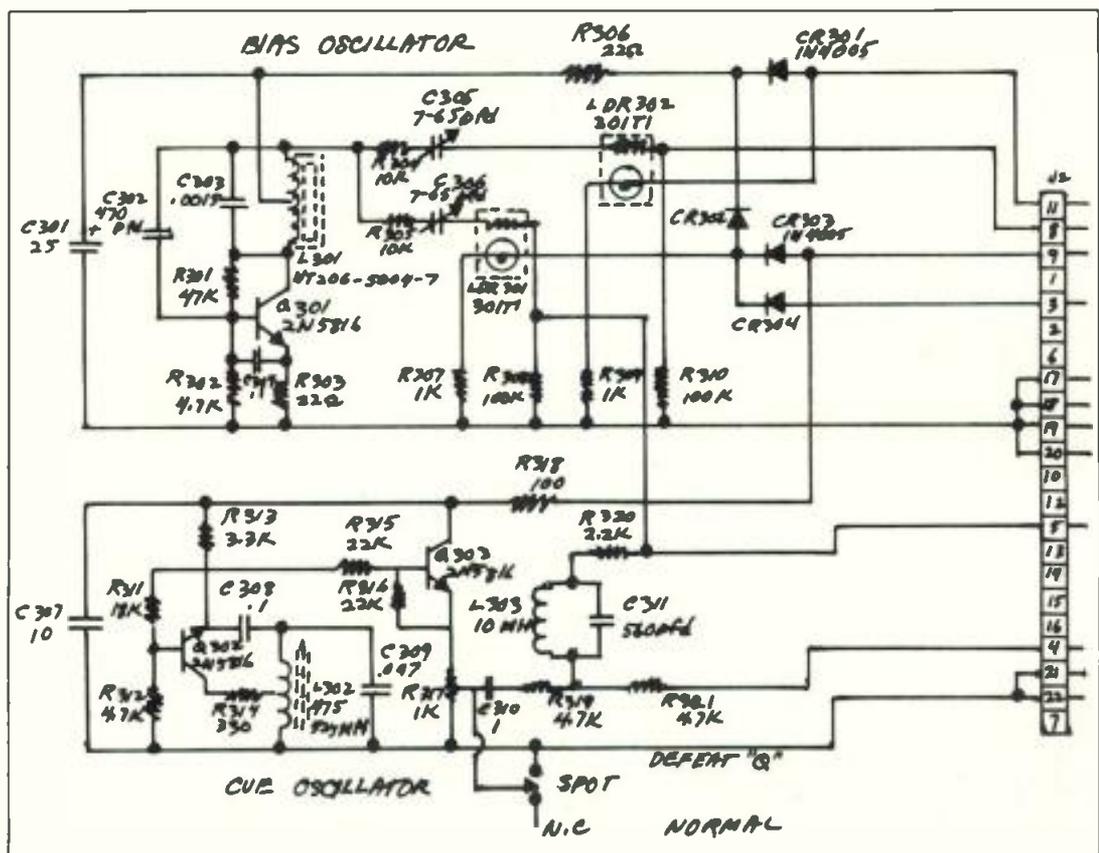



# Easy does it.



Available in 2", 1", 3/4" and 1/2" Beta and VHS.

Circle 187 on Reader Service Card



© 1981 Fuji Photo Film U.S.A., Inc., Magnetic Tape Division, 350 Fifth Avenue, NY, NY 10118





## HOW TO ADD SPICE TO YOUR VIDEO PICTURE

"It adds spice to our commercial production."

That's what Bob Donahue said about his station's NEC Digital Mix Effects System. Bob is Vice President and Director of Engineering at WMAR-TV, Baltimore, where producing commercials is a big part of the business.

"DME makes our commercial production salable," Bob said. "Before we installed it, we could not flip, tumble or electronically shrink our picture and move it where we wanted in the frame. It makes our entire picture more interesting, because it gives us a lot more flexibility."

Sophisticated video effects are only one of the advantages that NEC's complete DME family of products offers the TV station. It provides full frame synchronization, plus intelligent digital control—all in a simplified, cost-efficient package. It's a highly flexible modular component system, designed to meet today's need for advanced production techniques. And you can expand its functions as your broadcast needs expand.

It's doing something like that for WMAR today. "We can now manipulate the information we have stored," Bob said, describing how DME's exceptional versatility

promises to keep pace with the station's continuing growth.

"We also use our DME for our news programs and for smooth transitions between segments of shows," Bob continued. "The fact is, we've still not exhausted its potential, and we're looking forward to exploring new ways to use it."

Find out how NEC can help you add spice to your programming with maximum cost-efficiency. Call today for a hands-on demonstration of DME.

WMAR-TV, Baltimore, Vice President and Director of Engineering, Bob Donahue.

# NEC

NEC America, Inc.  
Broadcast Equipment Division  
130 Martin Lane  
Elk Grove Village, Illinois 60007

Call Toll Free 800-323-6656  
In Illinois, call 312-640-3792

Circle 190 on Reader Service Card

[www.americanradiohistory.com](http://www.americanradiohistory.com)

**Coming next year...**

# The New Great Ideas Contest!

Here's a chance to share your own personal solutions to some of broadcasting's most vexing engineering needs: end-of-tape sensing . . . cart deck synchronization . . . on/off-air indication on the mixing board . . . distributing timing pulses . . . and the like.

Each month we will present a specific engineering problem and you are invited to submit ideas on how to solve it. You can send in descriptions and diagrams of equipment you have already built or else ideas on how you think the problem ought to be solved. *BM/E's* editors will read the entries

and select some for publication — giving readers an opportunity to vote for the idea they consider best.

To attract the most original solutions possible, we will pay \$10 for each entry we print. In addition, the winner of each month's competition — the one voted for most often on our Reader Service Card — will receive an engineering slide rule calculator as a prize.

So put on your thinking cap — and get ready for the first contest problem, which will be presented *here* in the December issue.

## YOU ONLY NEED ONE OF OURS.

No reliability problems from microphone or cable with the subminiature Sennheiser MKE-10 electret. Not only better-sounding, it's better looking—because you *don't* see it.

**SENNHEISER**  
ELECTRONIC CORPORATION  
10 West 37th Street, New York, NY 10018  
(212) 239-0190



Manufacturing Plant: Bissendorf/Hannover, West Germany  
© 1980, Sennheiser Electronic Corporation (N.Y.)

Circle 191 on Reader Service Card

## Tektronix Television

### Sales Engineer

You know the Tek TV Sales Engineers. They are the people respected throughout the industry for their sales professionalism and technical expertise. They are the highly motivated self-starters who work in a true consultative selling environment solving technical problems and communicating with both engineering and management. They have BSEE's or equivalent and are "committed to excellence."

A recent expansion in our sales force has created openings in Syracuse, Philadelphia, New Orleans, Denver, and Los Angeles. If you have the professional as well as technical qualifications and are interested in a career growth opportunity with an industry leader, we would like to talk to you.

Please call or write:  
Mark C. Gray, Western Regional  
Sales Manager, Tektronix, Inc.,  
3003 Bunker Hill Lane, Santa Clara,  
CA 95050, (408) 496-0800.

We are an equal opportunity  
employer m/f/h.

**Tektronix®**  
COMMITTED TO EXCELLENCE

# THE ULTIMATE TAPE CARTRIDGE

NEW **Master Cart II**™



Over 20 years of cartridge experience brings you the new Fidelipac Master Cart II - the ultimate tape cartridge.

- Superior performance in any tape machine.
- Extremely low friction tape path for minimum wow and flutter and longest tape life.
- New front corner post for precise tape alignment and excellent stereo phase stability.
- Factory loaded with Fidelipac's exclusive HOTTAPE®, for up to 8dB more output than standard tapes.

## GET YOUR HANDS ON MASTER CART II!

*Just send us \$1.00 to cover postage and handling, along with your business card or letterhead and we'll rush you a Master Cart II for your evaluation. This offer expires December 31, 1981 and is limited to one cartridge per station.*




**Fidelipac Corporation**

P.O. Box 808, Moorestown, NJ 08057  
609 235-3511 Telex II 710-897-0254

Circle 193 on Reader Service Card

# THE ELECTROHOME DIFFERENCE.

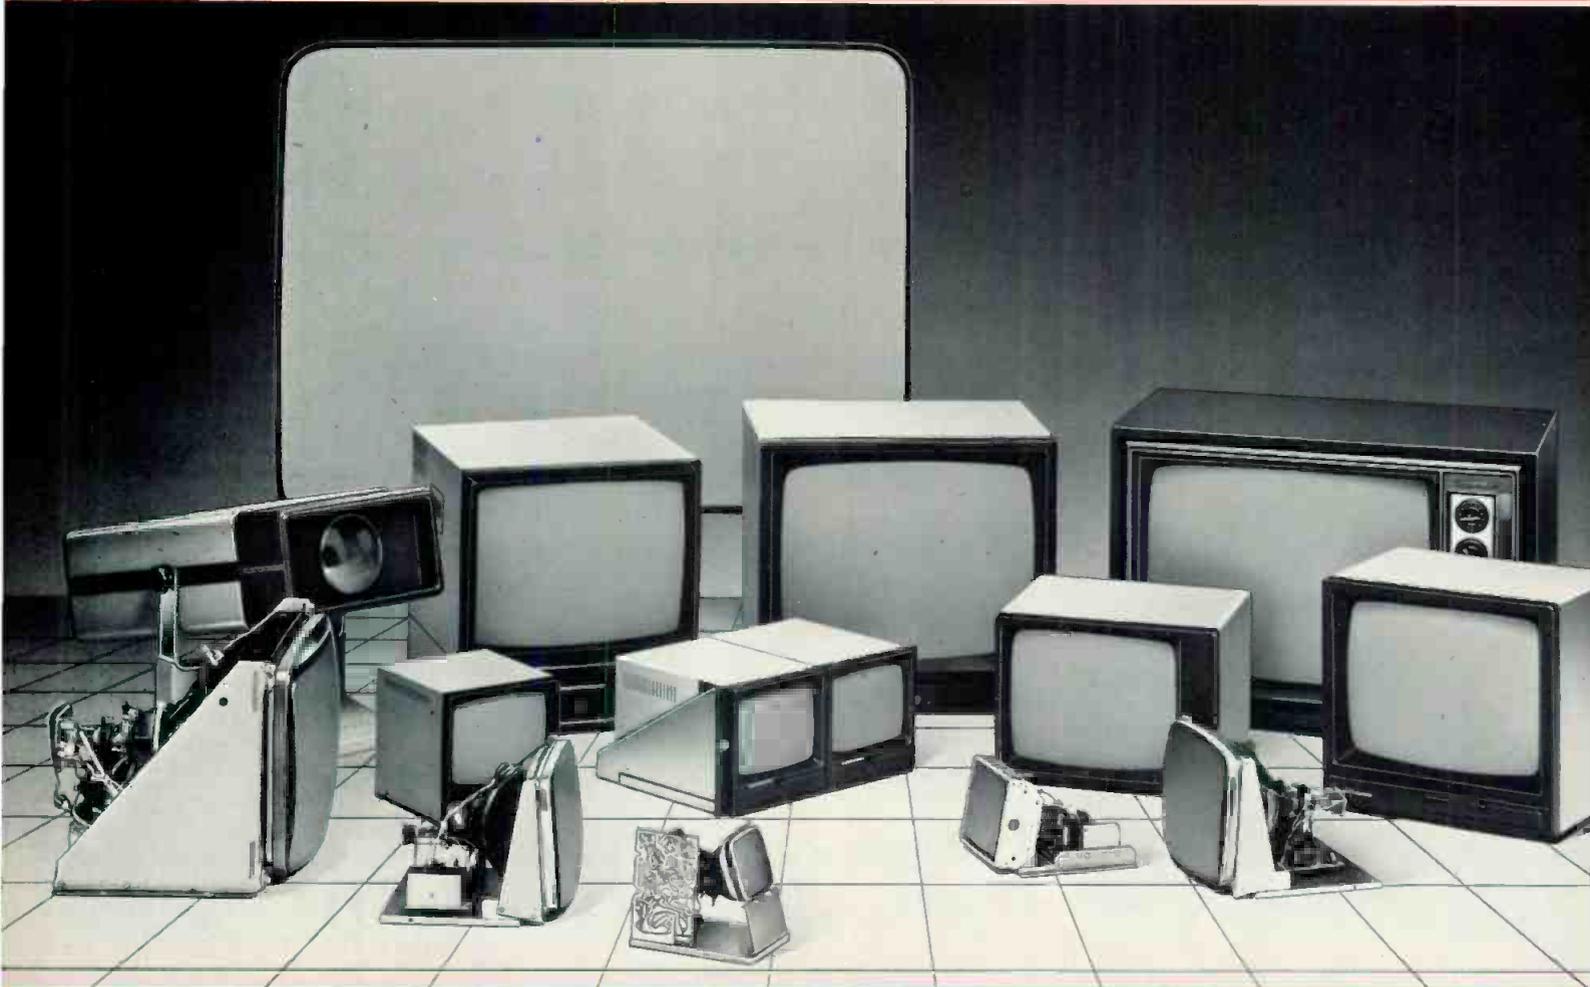

## GET IT WITH THE FULL LINE OF ELECTROHOME VIDEO DISPLAYS.

When you choose Electrohome video displays, you're in good company. All over the world, experts in many fields including data, graphics, broadcast, medical education and industry, demand the proven dependability of Electrohome. They count on the Electrohome difference.

Electrohome offers a broad selection of competitively-priced video displays. Attractive, durable, color and monochrome products are available in screen sizes

from 5 inches to 6 feet. Breadth of line...it's an important part of the Electrohome difference.

At Electrohome, we realize that everyone's needs aren't standard, so we will build video display units to meet your special requirements. Custom flexibility...that's part of the Electrohome difference.

Don't settle for second best—get the Electrohome difference. For complete information on video displays with the difference, contact us.

## ELECTROHOME ELECTRONICS

809 Wellington St. N., Kitchener, Ontario, Canada N2G 4J6. Telephone (519) 744-7111. Telex 069-  
Circle 194 on Reader Service Card

# INTERPRETING THE **FCC** RULES & REGULATIONS

## Section 315: The Equal Opportunity Doctrine

By Frederick W. Ford and Lee G. Lovett; Lovett, Ford, Hennessey,  
Stambler & Siebert, P.C., Washington, D.C.

THE NEW CHAIRMAN of the Federal Communications Commission, Mark Fowler, has made it a mission to have Congress repeal Section 315 of the Communications Act, as amended. If not repealed outright, he would seek to have it changed substantially. The two, key components of Section 315 are the so-called "equal time" provisions and the "fairness doctrine." Chairman Fowler and his new majority on the Commission, along with many broadcasters, believe that these two provisions conflict with the First Amendment rights of broadcasters. However, since the passage of the Radio Act in 1927, the Congress has disagreed.

At this time, the outcome of the likely battle in Congress over these two issues is very much in doubt. In the meantime, it is important to recognize each broadcaster and cable operator's responsibility under Section 315. In the next two issues, this column will review the very important responsibilities outlined in Section 315. In this issue, we will review the requirements for equal opportunities for legally qualified candidates to use broadcasting and cable casting facilities. We will discuss the background of the legislation in Congress as well as the court interpretations of that statutory mandate. Next month, this column will examine the fairness doctrine in similar detail.

### The statute

Section 315 of the Communications Act, as amended, requires that licensees give all legally qualified candidates equal opportunities to use these facilities once an opposing candidate has been allowed to "use" the facilities.<sup>1</sup> Under Section 315(a), four types of appearances by candidates are exempted from this requirement: (1) newscasts; (2) news interviews; (3) news documentary programs (see below); and (4) on-the-spot news coverage.

Section 315(b) sets forth the requirement that you have come to know as the "lowest unit rate." In brief, stations must charge candidates the lowest prevailing rate for a segment of comparable air-time around elections. Section 315(c) specifically includes cable television operators

within this section.

The statute (§315) reads as follows:

- (a) "If any licensee shall permit any person who is a legally qualified candidate for any public office to use a broadcasting station, he shall afford equal opportunities to all other such candidates for that office in the use of such broadcasting station: provided, that such licensee shall have no power of censorship over the material broadcast under the provisions of this section. No obligation is imposed under this subsection upon any licensee to allow the use of its station by any such candidate. Appearance by a legally qualified candidate on any (1) bona fide newscast; (2) bona fide news interview; (3) bona fide news documentary (if the appearance of the candidate is incidental to the presentation of the subject or subjects covered by the news documentary); or (4) on-the-spot coverage of bona fide news events (including but not limited to political conventions and activities incidental thereto), shall not be deemed to be use of a broadcasting station within the meaning of this subsection. Nothing in the foregoing sentence shall be construed as relieving broadcasters, in connection with the presentation of newscasts, news interviews, news documentaries, and on-the-spot coverage of news events, from the obligation imposed upon them under this Act to operate in the public interest and to afford reasonable opportunity for the discussion of conflicting views on issues of public importance.
- (b) The charges made for the use of any broadcasting station by any person who is a legally qualified candidate for any public office in connection with his campaign for nomination for election, or election, to such office shall not exceed (1) during the forty-five days preceding the date of a primary or primary runoff election and during the sixty days preceding the date of a general or special election in which such person is a candidate, the lowest unit charge of the station for the same class and amount of time for the same period; and (2) at any other time, the charges made for comparable use of such station by other users thereof.
- (c) For the purposes of this section: (1) the term "broadcasting station" includes a community antenna television system; and (2) the terms "licensee" and "sta-

<sup>1</sup>47 U.S.C. §315.

## FCC Rules & Regulations

tion licensee" when used with respect to a community antenna television system, mean the operator of such system.

- (d) The Commission shall prescribe appropriate rules and regulations to carry out the provisions of this section.

### Historical interpretation of Section 315

Congress adopted an equal opportunity provision for broadcasters as early as 1927 when it included Section 18 in the Radio Act.<sup>2</sup> The authors of the statute wished to avoid abuse of the radio by candidates for public office, which even then was recognized as a very powerful communications medium.

In the Radio Act of 1927 and the Communications Act of 1934, Congress essentially took steps which resulted in some limitation of the absolute freedom of broadcasters because Congress had determined to regulate the distribution of frequencies on the airwaves, themselves a public resource. Congress has also determined to regulate railroads, air traffic, and use of public waterways. Although not common carriers, broadcasters still have a duty to serve the public interest, convenience, and necessity. Furthermore, broadcast facilities are limited by the technical fact that only one broadcaster may use a particular facility in a particular location at one time. Thus, a broadcast license signifies a public trust requiring that broadcasters serve the general public interest.

Some argued then (and many people, including chairman Fowler continue to do so) that Section 315 conflicts

with the freedom of the press protected by the First Amendment of the United States Constitution. In the *NBC* case, the U.S. Supreme Court drew a distinction that the court applied to the licensing process as a whole:

"Freedom of utterance is abridged to many who wish to use the limited facilities of radio. Unlike other media of expression, radio inherently is not available to all. That is its unique characteristic; and that is why, unlike other modes of expression, it is subject to governmental regulation. Because it cannot be used by all, some who wish to use it must be denied . . . . The standard provided for the licensing of stations by the Communications Act of 1934 was the 'public interest, convenience, or necessity.' Denial of a station licensed on that ground, if valid under the Act, is not a denial of free speech."<sup>3</sup>

That distinction applies to a broadcaster's responsibilities under Section 315. In 1969, the Supreme Court held specifically that Section 315 did not violate the First Amendment rights of broadcasters. Specifically addressing the Fairness Doctrine, the Court stated that primary right protected by the First Amendment was the *public's right to be informed*. According to Justice White, "it is the right of the public to receive suitable access to social, political, esthetic, moral, and other ideas and expressions which is crucial here."<sup>4</sup>

### Licensee discretion

Congress has historically not considered this legal re-

*Continued on page 130*

<sup>2</sup>44 Stat. 1162, 47 U.S.C. §99 (1927). Repealed and superseded by the Communications Act of 1934.

<sup>3</sup>*National Broadcasting Co. v. U.S.*, 319 U.S. 190, 63 S. Ct. 997, 1014, 87, L.Ed. 1344 (1943).

<sup>4</sup>*Red Lion Broadcasting Co. v. FCC.* 395 U.S. 367, 388, 89 S. Ct. 1794, 1806-07, 23 L.Ed2d 371, 388 (1969).

# Broadcast Production Consoles

GREAT AUDIO STARTS HERE

### FEATURES:

Stereo Outputs  8 or 12 Channels

Up to 24 Inputs  All Inputs &

Outputs Balanced  QM-8P, 4 Stereo Channels standard, 0,


2 or 6 optional  QM-12P, 4 Stereo Channels standard, 0, 2,

6, 8 or 10 optional.  
**Input Channels:** 3 Knob EQ with In/Out Switch  Echo, headphone and Cue Send  Channel On and Remote Start  High Quality Conductive Plastic Faders.

**Output Channels:** 4 Balanced  Low Noise, Low Distortion  May be Stereo or Mono.

**Monitoring:** 4 Independent Monitors  Flexible Control Room Selection  Talkback to Studio Muting

QUANTUM offers the following options for the QM-8P and QM-12 P: Phantom Power Supply  104 Point Patchbay  8 or 12 Channel Input Expander.

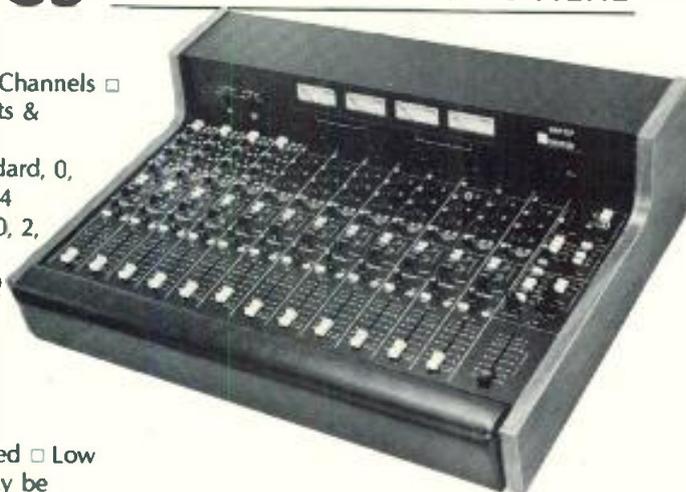


**QUANTUM**  
AUDIO LABS, INC.

1909 Riverside Dr., Glendale CA 91201  
Telephone (213) 841-0970

*Quantum Audio Labs is an independent manufacturer and is not affiliated with any retail store.*

## NOW! CONTINENTAL'S 40 KW FM

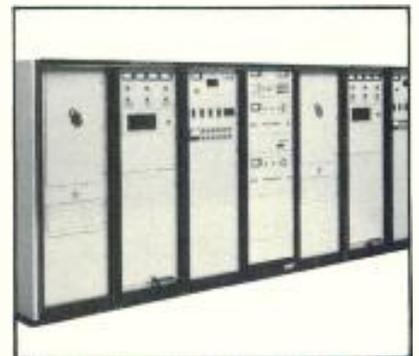

**High performance.** Offers you high fidelity, dynamic balance, good stereo separation, extremely low noise and distortion; excellent frequency stability. Easy installation. Low power consumption. Proven exciter. Available with fully automatic exciter and combiner control.


Write for brochure on 817R-2  
Continental Electronics Mfg. Co.  
Box 270879  
Dallas, Texas 75227

Continental  
Electronics 

Circle 195 on Reader Service Card

Circle 196 on Reader Service Card

# LISTEN TO THE DIFFERENCE.

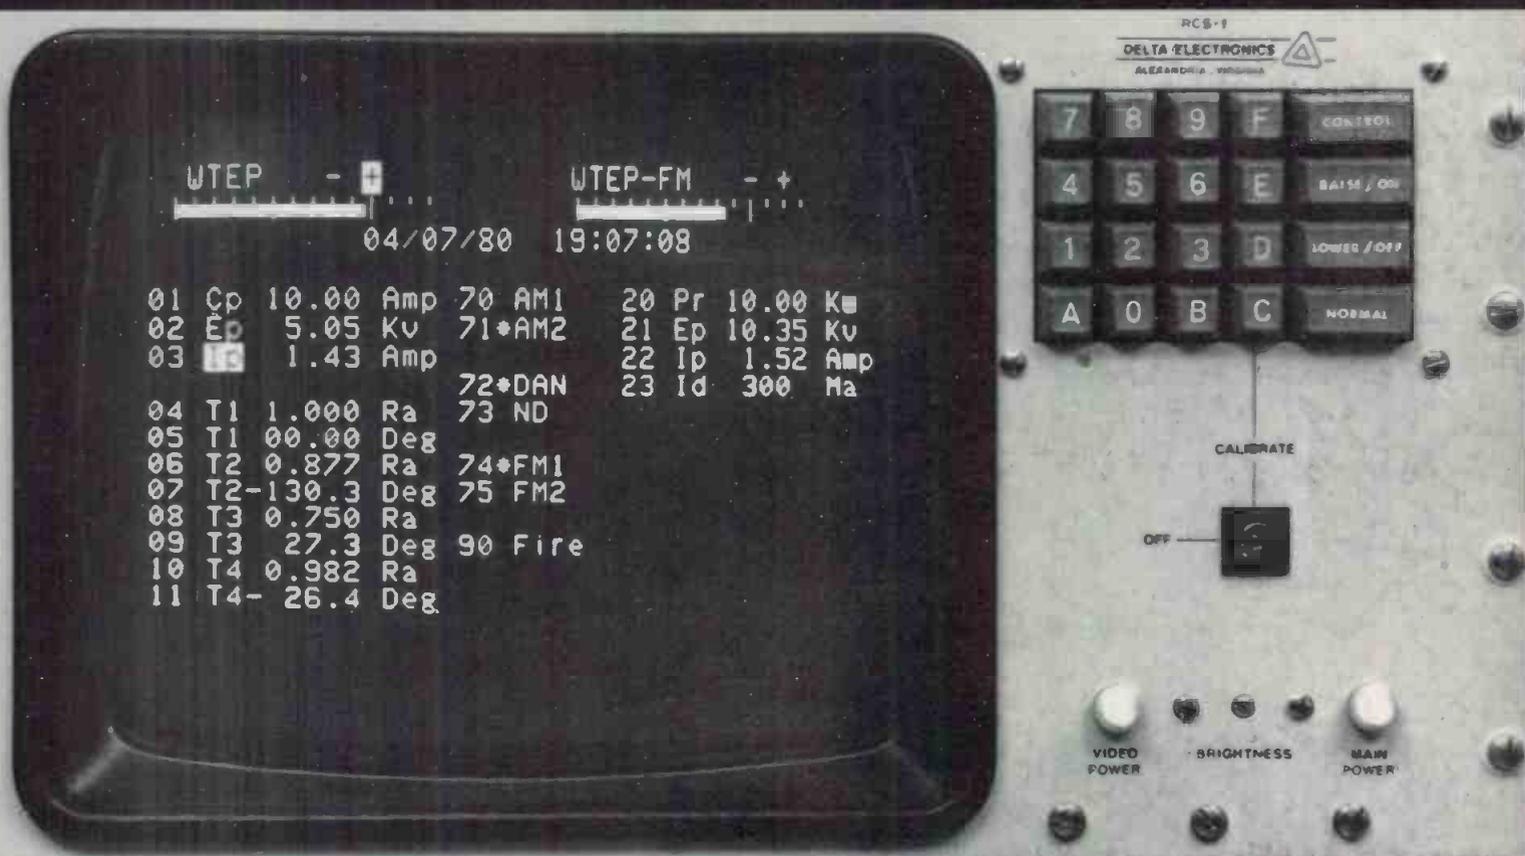

## THE DELTA RCS-1 REMOTE CONTROL SYSTEM

*A simple, yet sophisticated approach to AM, FM and TV Remote Control*

### SIMPLE.

- All parameters are displayed for the operator.
- Hands-off operation until an actual control function is required.
  - Automatic logging option ends the nightmare of forgotten or incorrect log entries.

### SOPHISTICATED.

- Features not found on other remote control systems:
- Modulation bargraph with peak flashers.
  - Direct antenna monitor interface.
  - Telephone coupler with speech synthesizer providing telephone interrogation.

The RCS-1 is designed to grow with your plant. Additional control, input, and alarm boards can be added to the systems, thereby meeting any new station requirements. In addition, the RCS-1 contains the fundamental building blocks for ATS, permitting conversion to a combination Remote Control/ATS System at a later date.

Write or call for a descriptive data sheet and pricing.

**DELTA ELECTRONICS**



5730 General Washington Drive, Alexandria, VA 22312 703-354-3350 TWX 710-832-0273

Circle 197 on Reader Service Card

## FCC Rules & Regulations

quirement to be a particularly restrictive one for broadcasters. Indeed, review of the legislative history<sup>5</sup> reveals that Congress all along has sought to give licensees as much discretion as possible when dealing with uses by candidates of radio and television.

In 1959, Congress added the four exemptions to the equal opportunities requirement of Section 315 noted above: newscasts, news interviews, some news documentaries, and on-the-spot news coverage. In doing so, Congress noted specifically that it sought licensee's discretion in matters pertaining to the news coverage of candidates and electoral campaigns. Up until 1959, Commission policy had been confusing. Too often, the FCC decided on the absolute rights for equal opportunities for opposing candidates even when the "use" in question was clearly a news item. The Congress saw the 1959 amendments as a balancing feature which would retain the essential features of the statute:

"It seems to the Committee that the principle of substantial (as distinguished from absolute) equality of opportunity for qualified political candidates, with respect to appearances on radio and television broadcasts, is a sound principle bearing in mind (1) the importance of radio and television in connection with our political process and (2) the fact that broadcasting facilities, and particularly television broadcasting facilities, are limited in number and subject to government licensing. Therefore, in the opinion of this Committee, an outright repeal of Section 315 would not be in the public interest."<sup>6</sup>

The exemptions to the rule would serve the public interest by informing the public of newsworthy events while avoiding pernicious uses of the media by electoral candidates. In the process, broadcasters would be expected to exercise their news judgement.

The Commission and the U.S. Court of Appeals further increased licensee discretion in matters of equal opportunity as a result of the *Aspen*<sup>7</sup> case. The Court of Appeals acknowledged the Commission's opinion in *Aspen* that "any appearance by a candidate on the broadcast media is designed, to the best of the candidate's ability, to serve his own political end."<sup>8</sup> However, the public does have a right to be informed. The Court held that the principal criterion for evaluating appearances by candidates in one of the four exempted categories was the broadcaster's good faith judgement of the news-worthiness of the event. The Court of Appeals most recently upheld this view in a 1980 case involving the presidential campaign of Senator Edward Kennedy, which tried to show that what it considered a purely partisan press coverage by President Carter merited an equal opportunity to respond.<sup>9</sup> The Court disagreed on the grounds that the major networks exercised

*Continued on page 133*

<sup>5</sup>Legislative history includes the U.S. Senate and House Reports, hearing transcripts, and remarks by individual members of Congress which accompany the passage of most bills. In and of itself, legislative history is not the law but courts often refer to it in order to determine Congressional intent in a particular law.

<sup>6</sup>House Report on 1959 Amendments to Section 315, House Report 802, 86 Cong., 1st Sess., submitted August 6, 1959.

<sup>7</sup>*Aspen Inst. Program on Communications and Society*, 55 FCC 2d 697 (1975), *aff'd sub. nom. Chisholm v. FCC*, 538 F.2d 349, 176 U.S. App. D.C. 1, cert. denied, 429 U.S. 890 (1976).

<sup>8</sup>*Chisholm*, 538 F.2d at 359.

<sup>9</sup>*Kennedy For President Committee v. FCC*, 636 F.2d 417 (D.C. Cir. 1980).

**LIGHTNING FAST  
YET PAMPERED**

That unique combination of  
**20-minute Burp Charger** and  
camera mounted, slide-lock,  
**super ni-cad battery.**

CHRISTIE  
REFLEX 20

SINCE 1929  
**CHRISTIE**  
ELECTRIC CORP.  
20665 Manhattan Place, Torrance, CA 90501  
(213) 320-0808, TWX 910-349-6260, (800) 421-2955

Circle 198 on Reader Service Card

## ULTRA-LIGHTWEIGHT TELESCOPING MICROPHONE POLES



### THREE MODELS:

- ★ Sm.—15½" to 46½"—  
Wt. 8.5 oz.!
- ★ Med.—22" to 67"—Wt. 9 oz.!
- ★ Lg.—4' to 13+ '—Wt. 22 oz.!

### SUPER-STRONG, PLUS

- ★ No-glare black Epoxy finish
- ★ Smooth, silent telescoping
- ★ Ideal, comfortable balance
- ★ Knurled friction lock
- ★ Int'l. Std. threaded stud

### MICROPHONE SUSPENSION:

- ★ Simple, secure!
- ★ Wt. only 3.25 oz.!
- ★ Threaded yoke support  
—no nut necessary



**LTM CORP. OF AMERICA**  
1160 N. Las Palmas Avenue, Hollywood, CA 90038 • (213) 460-6166  
LTM FRANCE: 104 Boulevard Saint-Denis • 92400 Courbevoie-France

Circle 199 on Reader Service Card

# MARQUEE 2000

## HIGH QUALITY CHARACTER GENERATION

MADE AFFORDABLE BY B.E.I.

### FONT LIBRARY:

A wide range of character styles and sizes is available for the "2000", including a selection of language characters.

Fonts are being added in a continuing basis, and we will be happy to create and supply special fonts to customer specifications.

### FONT STORAGE:

The "2000" will display up to four standard fonts, each selectable on a character by character basis from the font memory.

Fonts are stored on floppy discs and entered into the font memory, via the integral disc drive unit.

### INTEGRAL FLOPPY DISC

**STORE:** As well as carrying out the various font-loading functions, the integral floppy disc store provides fast memory access.

### FONT COMPOSE UNIT

**(optional):** The camera, Font Compose Unit provides the operator with the ability to create his own unique character sets, logos and graphic shapes.

### RS-232-C INTERFACE:

A standard feature of the "2000" is its ability to receive asynchronous data from external data processors and computers, via its RS-232-C interface, 20mA current loop, or TTL level input.

### COMPACT SIZE:

The "2000" mainframe, which includes the power supply and disc drive unit, measures only 19" (483mm) wide x 14" (356mm) high x 18½" (470mm) deep, and weighs only 61.5 pounds, making it ideally suited for use in a mobile unit.

### INTERNAL COLORIZER:

Both background and text can be separately colorized by the internal colorizer in red, green, blue, cyan, magenta, yellow, white and black. Background color can be changed for each row, and text color can be changed for each word. An NTSC encorder is required.

### EDGING:

Text, including logos, etc., can be displayed with either surround edging, drop-shadow edging or no edging on a line by line basis, each selectable from the keyboard.



### DOUBLE LOGOS:

A feature of the "2000" is its ability to display rows of characters immediately to the right of the logo or graphic symbol. Double logos are associated with 2 rows of characters.

### LOGOS:

Logos and graphic symbols can be created to special order from customers' artwork.

### CHARACTER RESOLUTION:

High-speed circuitry enables the "2000" to display characters having start-stop increments of 31.25 nanoseconds.

### INTER-CHARACTER

**SPACING:** In order to display captions of correct density and weight, each character is assigned a unique spacing element, ranging from 500 nanoseconds to 8 microseconds, in 31.25 nanosecond steps. In addition to this, individual characters can be shifted to the left in 125 nanosecond increments to achieve true character overlap.

### AND MORE . . .

SUBTITLES.

ROW CENTER.

HORIZONTAL ROW SHIFT.

VERTICAL SHIFT.

ROLL/CRAWL.

FLASH.


UNDERLINE.

ITALICS.

CHARACTER INSERT AND DELETE.

SERVICE DIAGNOSTICS CARD.

DUAL CHANNEL OPTION.

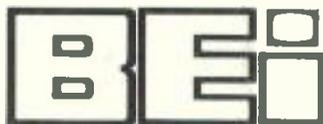

P.O. Box 937-Olathe, Kansas 66061  
Toll Free 1-800-255-6226  
In Kansas 913-764-1900  
TWX 910-749-6401

# Never build an editor that can become obsolete...



## And it goes for every Z editor ever built.

Considering all the advancements made in videotape editing systems in just the last three years, you might think your Mini-Z or Z-6 editing system is becoming obsolete. Well, it's not.

In fact, even though we're introducing a whole new line of Z6000 editors, the very first Z editor we ever built can be fully upgraded to Z6000 capability for less than \$4,500!

So, if you own a Videomedia editing system, hang on to it. For a surprisingly low cost, you can expand its capabilities whenever you want.

## Frame accurate editing, for under \$11,000.

Don't buy a system with more features than you need. If you do, you're paying for "extras" before you can use them. Instead, invest in a system that can grow with you.

For example, start with a Z6000-A, a cuts-only editor with four-way split edits, auto extend and tag, four-event swap/recall, printer output, and the ability to select in and out points on the fly. Like all Z6000 editors, it has distributed intelligence, which controls each transport with an

individual microprocessor, thus eliminating timing discrepancies... all for less than \$11,000!

What's more, you'll be able to add features, such as our new KR6000 character generator for integrated graphics control, when you need them, at a fraction of the cost of a new system with the same capabilities.

## Keep up to date at your own pace.

Whenever we build a new product or add a new capability, we make sure that it adapts to all our previous systems.

That's why, when you buy any Videomedia product, you're investing in a system with a future.

For complete details on our entire line of editing systems, post-production equipment, and a copy of our exclusive No-Obsolescence Policy, call or write today.

**Videomedia**  
Professional Television Systems

250 North Wolfe Road  
Sunnyvale, CA 94086  
Telephone: (408) 733-6500

Circle 201 on Reader Service Card



## FCC Rules & Regulations

their journalistic judgement in good faith.

Finally, it is important to understand, as briefly noted above, that Section 315 does not grant absolute rights to candidates and impose absolute responsibilities on broadcasters and cable operators. Conceivably, a broadcaster or cablecaster might not grant any opportunities at all to candidates during election campaigns. In this way, no rights of candidates would be abridged. However, the American public would suffer from a lack of information about candidates for public office. The rights of candidates are only conditional ones, that is to say, they only come into effect once another candidate has used the radio, television, or cable television facilities. As the Court of Appeals noted in another decision involving the Kennedy campaign:

"Since Section 315(a), as its proviso specifically states, does not impose an unconditional obligation on broadcasters to allow use of their station facilities by any candidate, the equal-opportunity grant has aptly been characterized as a contingent right of access. It does not compel a broadcaster to afford access to any candidate, in the first instance, but it does mandate parity for all candidates for a given office once access by one is permitted."<sup>10</sup>

### Conclusions

Section 315, like all of the Communications Act itself, seeks to balance several interests in regulating the conduct of licensees. In recognition of the qualities of the airwaves

as a public good, Congress and the courts have sanctioned the regulation of broadcasting. In the case of Section 315, the Congress has imposed requirements on broadcasters to grant legally qualified opposing candidates access to broadcasting and cablecasting facilities whenever they are first used by a candidate for the same office.

Beginning in 1959, both Congress and the FCC began granting substantial deference to the discretion of broadcasters in evaluating what is and what is not a newsworthy item. Furthermore, candidates' rights are *not* absolute. Broadcasters might choose to ignore all requests by candidates for broadcast time. Candidates exercise their rights under Section 315 only after another candidate has used the facilities.

We have attempted to discuss the issues involved as discussion mounts over whether or not to retain Section 315. In closing, it is important to remember the particular impact of the broadcast media on information which the American public receives today. "Since 95 percent of our people operate a television set for an average of over five hours a day, and 60 percent rely primarily on television for news, it would be hard to overestimate the importance of television to our political processes."<sup>11</sup>

The impact of the broadcast media is such that if and when Section 315 is ever repealed, it will not happen without substantial discussion in the press, in the Congress and in the courts.

BM/E

<sup>10</sup>*Kennedy For President Committee v. FCC (Kennedy II)*, 636 F.2d 432 (D.C. Cir. 1980).

<sup>11</sup>*Wick*, "The Federal Election Campaign Act of 1971 and Political Broadcast Reform," 22 DePaul L. Rev. 582, 1973.

### Communications

## CHIEF BROADCAST ENGINEER

Maintain, repair, calibrate and operate a wide variety of television equipment and systems including broadcast color television production studio; telecommunications, radio and television facilities; video tape editing system; micro wave and ITFS transmitters. All new equipment including three Hitachi SK-90 cameras and RCA TH200 1" recorder. Second class RT Operators license required. 12 month contract. Salary \$1,930. per month plus benefits.

Applications accepted through Nov. 30, 1981

### PALOMAR COLLEGE

1140 W. Mission Road  
San Marcos, CA 92069  
714/744-1150 or 727-7529  
Ext. 2200 for additional details

Equal Opportunity Employer

# OTARI GIVES YOU MORE AND WE'LL PROVE IT:



MTR 10/2 1/4" Two-track Recorder  
STANDARD FEATURES

- Return to zero
- Reverse play feature
- Controlled tension for smooth pack
- Digital speed readout
- Interface for SMPTE interlock
- Switchable bias
- Roll-around cabinet
- Headphone monitor
- Three speed
- and many more features

\$6,450. LIST

#### Options:

- Ten position tape locator—\$700.
- Overhead meter bridge (available exclusively from Everything Audio).

Call for more information

**EVERYTHING  
AUDIO**


16055 Ventura Bl., Suite 1001  
Los Angeles, CA 91436  
Phone (213) 995-4175 • Telex 651485

Factory service  
for warranty and repair

EVERYTHING AUDIO offers  
signal processors, microphones, monitors,  
—everything in professional audio, plus  
Acoustic design and consultation services  
for your control room or production facility.



# BRING THE EVENT HOME WITH

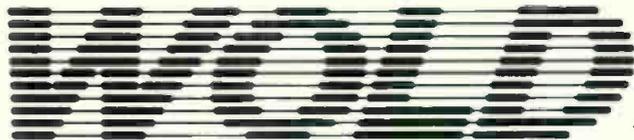

TM

News, sports, entertainment . . . whatever the event, big or little, bring it home with Wold Communications. Wold offers what it takes to get your live broadcast signal off the ground and where you want it.

Terrestrial long lines, space-borne transponders, satellite earth stations, both fixed and transportable. Uplinks and downlinks. Wold Communications has this and more to meet your radio and television electronic delivery needs.

From its first satellite transmission of a live sporting event in 1975 to the return of the freed hostages from Iran in 1981, Wold Communications has been there. For almost a decade Wold has handled point to point feeds of nearly every major league team.

Cost efficient, unchallenged in experience and reliability, Wold has interconnected radio and television networks to meet the specific needs of broadcasters, producers, syndicators and sponsors.

Call a Wold representative and see how we can bring your next event home.

**WOLD COMMUNICATIONS**  
TM  
a division of  
The Robert Wold Company

**NEW YORK**  
Empire State Building  
New York, NY 10118  
(212) 947-4475

**WASHINGTON, D.C.**  
8150 Leesburg Pike  
Vienna, VA 22180  
(703) 442-8550


**LOS ANGELES**  
10880 Wilshire Blvd.  
Los Angeles, CA 90024  
(213) 474-6876

Circle 202 on Reader Service Card

# BROADCAST EQUIPMENT

## Reel-to-Reel Recorder/Reproducer 250


The 770 Series reproducer and recorder/reproducer, designed to meet or exceed NAB standards, are available in a variety of configurations including one or two-track, mono or stereo, with tape speeds of 3 3/4, 7 1/2, and 15 ips. The reproducer is suited for program auto-

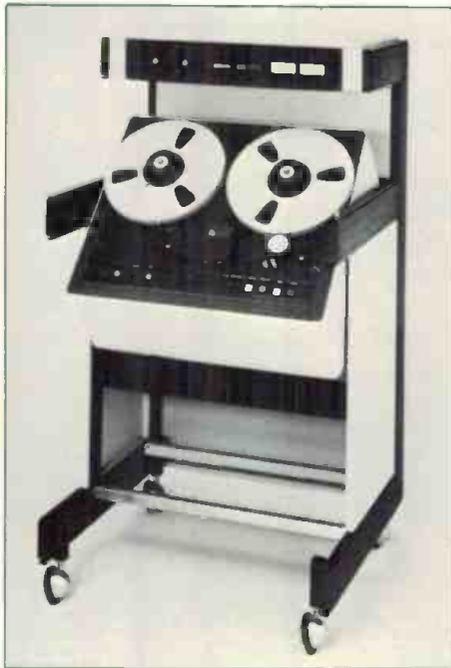

mation system applications, while the recorder/reproducer is a moderately priced general-purpose machine. Both are constructed with a heavy half-inch thick aluminum tool plate deck for stability and have a unique, high-quality professional head assembly with two torque motors for supply and take-up reel handling and dc servo capstan motor for tape drive. Other features include cast stainless steel turntable; long-life, positive action control switches; multispeed dc servo capstan motor; automatic cue lever and tape lifter; and improved magnetic playback head. INTERNATIONAL TAPETRONICS CORP.

## Character Generator 251

KR6000 is a new post-production character generator that can operate as a standalone or with a computer-aided editor. It may be operated manually with any video source (heterodyne or RS-170) without sync generators, switchers, or keyers. It will also serve as a full alphanumeric keyboard for the maker's Z6000 editing system. The

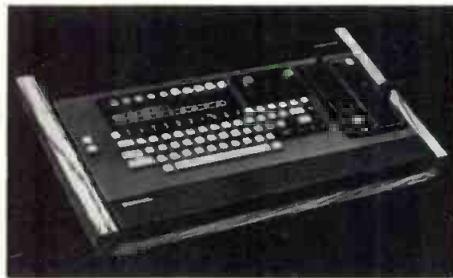

character generator automatically genlocks to any color input signal and produces composite sync and burst even if there is no input signal. A built-in downstream keyer dissolves graphics and titles onto the incoming signal; the entire composite picture can be faded to or from black. The fade and dissolve durations can be either user-programmed or manually controlled. The unit has one fixed and three interchangeable cartridge-type fonts, which may be ordered in any size; character spacing is proportional. Up to 16 colors can be selected, character by character. From \$13,500. VIDEOMEDIA, INC.

**For more information  
circle bold face numbers  
on reader service card.**

## Audio Delay 252

Model 4502 Time Modulator, offering delay capabilities of 400 ms, has two isolated delay lines with three taps each, assignable to two processing buses, one positive and one negative. The digital-assisted control format makes the unit easy and fast to operate, the maker states. Features include 2000:1 delay range, from under 200  $\mu$ s, with comprehensive mixing facilities; full 15 kHz bandpass and 95 dB dynamic range at all delay settings; full 72:1 continuous sweep range; programmable locked sweep delay ratios of the internal delay lines; separate modulation waveform selection switch, LFO high and low sweep LEDs, isolated flange and delay sections; ultra fast headroom indicator; independent output level (mix) controls for each assigned delay tap; expanded effects catalog. MARSHALL ELECTRONIC.

## Video Camera 253


Model KY-1900U is a three-Saticon® video camera with 500-line center resolution and specifications equal to the

## HYDRAULIC ENG MASTS

SMOOTH • SAFE • SURE

6 to 60 FT.

- ▣ STOPS AND STAYS AT ANY LEVEL • WITH PUMP OFF.
- ▣ 150 to 350 LB. LIFT WITH SINGLE MAST.
- ▣ INSIDE OR OUTSIDE MOUNTS SMALL OR LARGE VANS.
- ▣ MICRO ADJUSTABLE • TO THE FRACTION OF AN INCH.
- ▣ CONTINUOUS ROTABILITY
- ▣ 1, 2 or 3 SPEED PUMPS.
- ▣ 12, 24 vdc / 120 vac
- ▣ CLEAN AND DRY
- ▣ NO MAINTENANCE.
- ▣ NO SUDDEN STARTS OR SLAMMING STOPS.
- ▣ ALL ALUMINUM
- ▣ REMOTE CONTROLLABLE TRAILER MODELS FOR STAKE OUT.
- ▣ CUSTOM DESIGN WELCOME

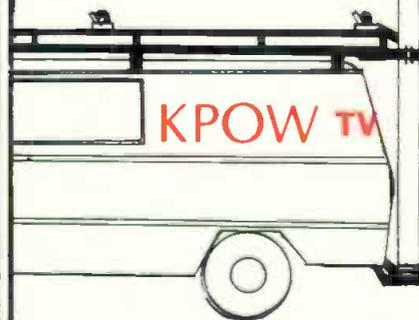

# N .PRO

▣ CALL OR WRITE.

1022 Hazelwood Dr.  
or P.O. BOX 604  
OREGON CITY, OR. 97045

(503) 656-5500  
657-5800

Circle 204 on Reader Service Card

# studio-proven pickups

**ON THE AIR**

Don't compromise true hi-fi phono cartridge performance to get the ruggedness required for professional use. Shure offers four cartridges designed to take the use and abuse to which professional phono cartridges are regularly subjected. These cartridges are designed specifically for professional studio, broadcast, disco and mobile sound use.



## SC39 Series

(SC39ED, SC39EJ, SC39B)

Three cartridges engineered to provide undistorted playback on even the "hottest" records, with enough durability for the most demanding backcuing and slip-cuing operations. Features include: SIDE-GUARD stylus deflector to prevent accidental damage to the shank assembly; MASAR™ stylus tip to minimize noise build-up and cue-burn on lacquer masters, often-played records, or 45's pressed on sub-standard vinyl; lever-operated STYLUS GUARD for unparalleled stylus protection when not in use; and incredibly flat frequency response through the mid-high bands.



## SC35C

A proven, durable performer designed for use on the heaviest and most rugged tone arms which require a tracking force of 4 to 5 grams. Easily visible stylus aids cuing. Rigid stylus shank stands up to abuse.




Shure Brothers Inc., 222 Hartrey Ave., Evanston, IL 60204  
In Canada: A. C. Simmonds & Sons Limited  
Manufacturer of high fidelity components, microphones, loudspeakers, sound systems, and related circuitry.

Circle 205 on Reader Service Card

## Broadcast Equipment


first-generation KY-2000U at nearly half the price. Weighing 7.7 pounds, the camera has S/N of more than 52 dB and 230 fc sensitivity at f/4.0. A +9 dB switch provides greater sensitivity

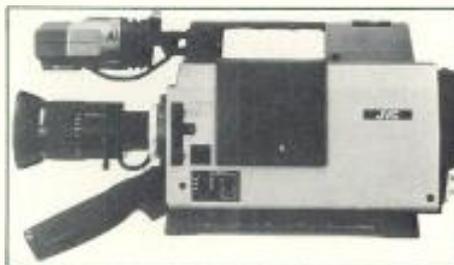

under low light conditions. Other features include automatic beam control, automatic white balance, and automatic iris. The camera comes with a 6:1 zoom lens and will accept a 10:1 or 14:1 servo zoom. Dichroic optics and a C-mount configuration permit the use of many 35 mm or 16 mm camera lenses. Power consumption with viewfinder is 15 W. \$4900 with 6:1 lens; \$5700 with 10:1 servo lens. U.S. JVC CORP.

## Stereo Measuring Decoder 254


The SMD-203 stereo measuring decoder, a companion unit to the maker's SC-200 series digital stereo generators, is designed to detect even minor changes in amplitude or phase charac-

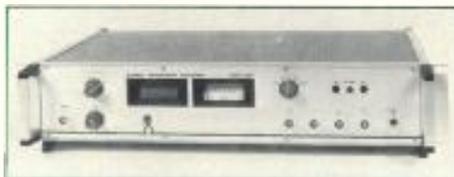

teristics of transmission systems using FCC-encoded stereo multiplex signals. Specifications of the decoder include: frequency range, 30 Hz to 53 kHz; input level, -12 to +12 dBm, input impedance, 2 x 20 Kohm balanced; common mode rejection  $\geq 50$  dB; output level, +6 dBm (other values on request); output impedance, 20 ohm maximum; crosstalk rejection L/R,  $> 60$  dB; distortion,  $< 0.1$  percent; SCA rejection,  $\geq 74$  dB; S/N,  $> 80$  dB. The unit runs on 110/240 V ac, 40/60 Hz and is rack-mountable. C.N. ROOD B.V.

## Vertical Interval Switcher 255

PSW-367 is a six by one vertical interval switcher for use in the maker's modular Series 300 video test system. The new switcher combines the capabilities of a test signal switcher and a six-input video switcher, providing an economical method of selecting the var-

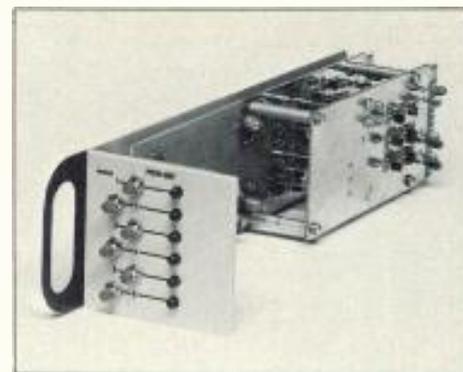

ious output signals from the 300 system or any other six external video signals. From the single module, any one of the six external inputs may be selected by a front-panel pushbutton. The unit has two 75 ohm source-terminated outputs. LENCO, INC.

## Graphic Equalizers 256

The 1651A active graphic equalizer is a single-channel model with 10 minimum phase shift, active band rejection filter sections. Enter-detented slide controls provide  $\pm 12$  dB boost/cut at ISO-preferred one-octave fre-



quencies (31.5 Hz to 16 kHz). The 1652A is a stereo version with the same features; both models incorporate a continuously variable high-pass filter with 18 dB/octave roll-off and user-selectable lowpass filter with 6 dB roll-off at 12.5 kHz. Model 1653A, the top of the line, is a fourth-generation  $\frac{1}{3}$ -octave EQ device with 29 minimum phase shift, active band rejection filter sections (25 Hz to 16 kHz) and continuously variable high-pass and low-pass filters providing roll-off at 18 dB/octave from off position to 20 through 160 Hz (high-pass) and from off position to 5 kHz through 20 kHz (low-pass). ALTEC LANSING.

**For more information  
circle bold face numbers  
on reader service card.**


## Film Editing System 257

EPIC is a video-assisted film editing system that overcomes the problems of matching film frame rates with video frame rates by updating the videotape vertical interval time code every field, rather than every frame. Film edge numbers, frame numbers, and other data are stored in user bits in the time



Cherokee Studios, Hollywood, California.

## JBL 4313 Studio Monitor. It flattens the competition.



### Introducing the 4313.

Flat frequency response. It means accuracy. Naturalness. Reality.

JBL gives it to you without the bigger box that you'd expect along with it, since the 4313 only measures about 23" x 14" x 10"!

This new, compact professional monitor produces deep, distortion-free bass. And does it with a newly developed 10" driver. Its massive magnet structure and voice coil are equivalent to most

12" or 15" speakers. Yet it delivers heavy-duty power handling and a smoother transition to the midrange than most larger-cone speakers.

The 4313's edge-wound voice coil midrange accurately reproduces strong, natural vocals and powerful transients.


Up top, a dome radiator provides high acoustic output with extreme clarity and wide dispersion. A large 1" voice coil gives it the ruggedness needed in

professional use. Working together, these precision matched speakers offer superb stereo imaging, powerful sound levels and wide dynamic range.

Audition the 4313 soon.

We think you'll agree that its combination of flat response, power and moderate size flattens the competition.

Available in Canada through Gould Marketing, Montréal, Québec.

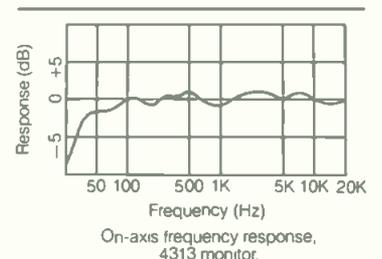

James B. Lansing Sound, Inc.,  
8500 Balboa Blvd.,  
Northridge, California 91329.

JBL First with the pros.

Circle 206 on Reader Service Card

©1980 James B. Lansing Sound, Inc.

## Senior Design Engineers

We are seeking Senior Design Engineers interested in growth opportunity in the exploding world of Digital Video technology.

MICROTIME is a leading manufacturer of digital processing equipment used in broadcast, cable, industrial and educational video facilities.

Qualified applicants are encouraged to send resume in confidence to MICROTIME, Inc. Attention: Gene Sarra, Chief Engineer, 1280 Blue Hills Avenue, Bloomfield, CT 06002.

An Equal Opportunity Employer M/F

**MICROTIME**

## swintek

The Leading Name In Cordless Microphone Systems



Transmitters small enough to be hidden almost anywhere, tiny microphones that are so unobtrusive that they probably won't even be noticed, hand-held microphones without the encumbrances of hundreds of feet of wire — that's what cordless microphone systems are all about. But there's one more factor of prime importance — reliability. If you're in television, radio or film and you want a cordless microphone system that not only offers the most advanced state-of-the-art electronics but the highest reliability rating in the industry, Swintek is the answer. There's a Swintek transmitter and receiver to fit your specific needs, no matter what your requirements. Check with us today about the greatest name in cordless microphone systems — Swintek.

**alan gordon enterprises inc.**

1430 N. Cahuenga Blvd., Hollywood, CA 90028  
Telephone: (213) 466-3561 • (213) 985-5500  
TWX: 910-321-4526 • Cable: GORDENT

Circle 208 on Reader Service Card

## Broadcast Equipment



code for use in conforming the film negative after editing. In operation, the film takes are transferred onto videotape; at this time, edge, scene, take, and reel numbers are multiplexed into user bits and stored in time code. The tapes are then loaded into the editor and each decision recorded on disk. After editing, EPIC prints out a list, in film terms, of takes, reel and scene numbers, and the type and duration of edits. The editor controls up to two switcher M/E banks and can handle up to eight audio or video recorders. Other capabilities are master-slave, sync-roll-mark, full look-ahead, and auto assembly. HARRIS VIDEO SYSTEMS.

### Weather Satellite Display 258

Developed by physicists at the University of Minnesota, this low-cost weather satellite display system includes a two-meter dish and receives weather




pictures and charts directly from GOES satellites. Television users with videotape or disk systems can record successive pictures for playback as a continuous satellite picture loop. Manufactured by Northern Video Graphics, the system stores satellite pictures on audio cassettes and features a times-two zoom to allow users to closely examine the high-resolution satellite images on a region-by-region basis. The system can also display standard weather facsimile

information from land-line sources. Under \$7000. SYNSAT COMMUNICATIONS, INC.

### Mini Fluid Head 259

A new lightweight mini fluid head for cine and video cameras measures five inches high by five inches deep by five inches wide. It smoothly pans a full 360 degrees and features a camera platform

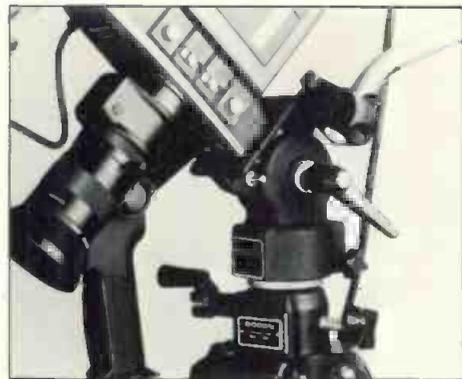

measuring 2 3/4 by three inches. Its three-in-one handle is positionable on either side and can be separated into two individual nine-inch segments. The head can be tilted continuously 45 degrees up and 90 degrees down, features detent at 45 degrees, and has separate pan and tilt locks. It weighs three pounds. \$99.95. BOGEN PHOTO CORP.

**For more information circle bold face numbers on reader service card.**


### Modulation Meter 260

Model 4101 is an automatic tuning modulation meter capable of automatically measuring either AM or FM modulation of RF signals in the 1.5 MHz to 2.0 GHz range at levels as low as 3 mV. It can measure either plus, minus, or



difference modulation (the last useful for balancing transmitter modulators). Pushbutton control determines operating mode, range, audio filters, and deemphasis networks. The user can select standard deemphasis networks of 50, 75, and 750  $\mu$ s, making the unit useful for checking FM broadcast transmitters and hand-held two-way

# PROCESS RVNP CAN GIVE YOU THE ONE THING EVERY NEWS DIRECTOR NEEDS:

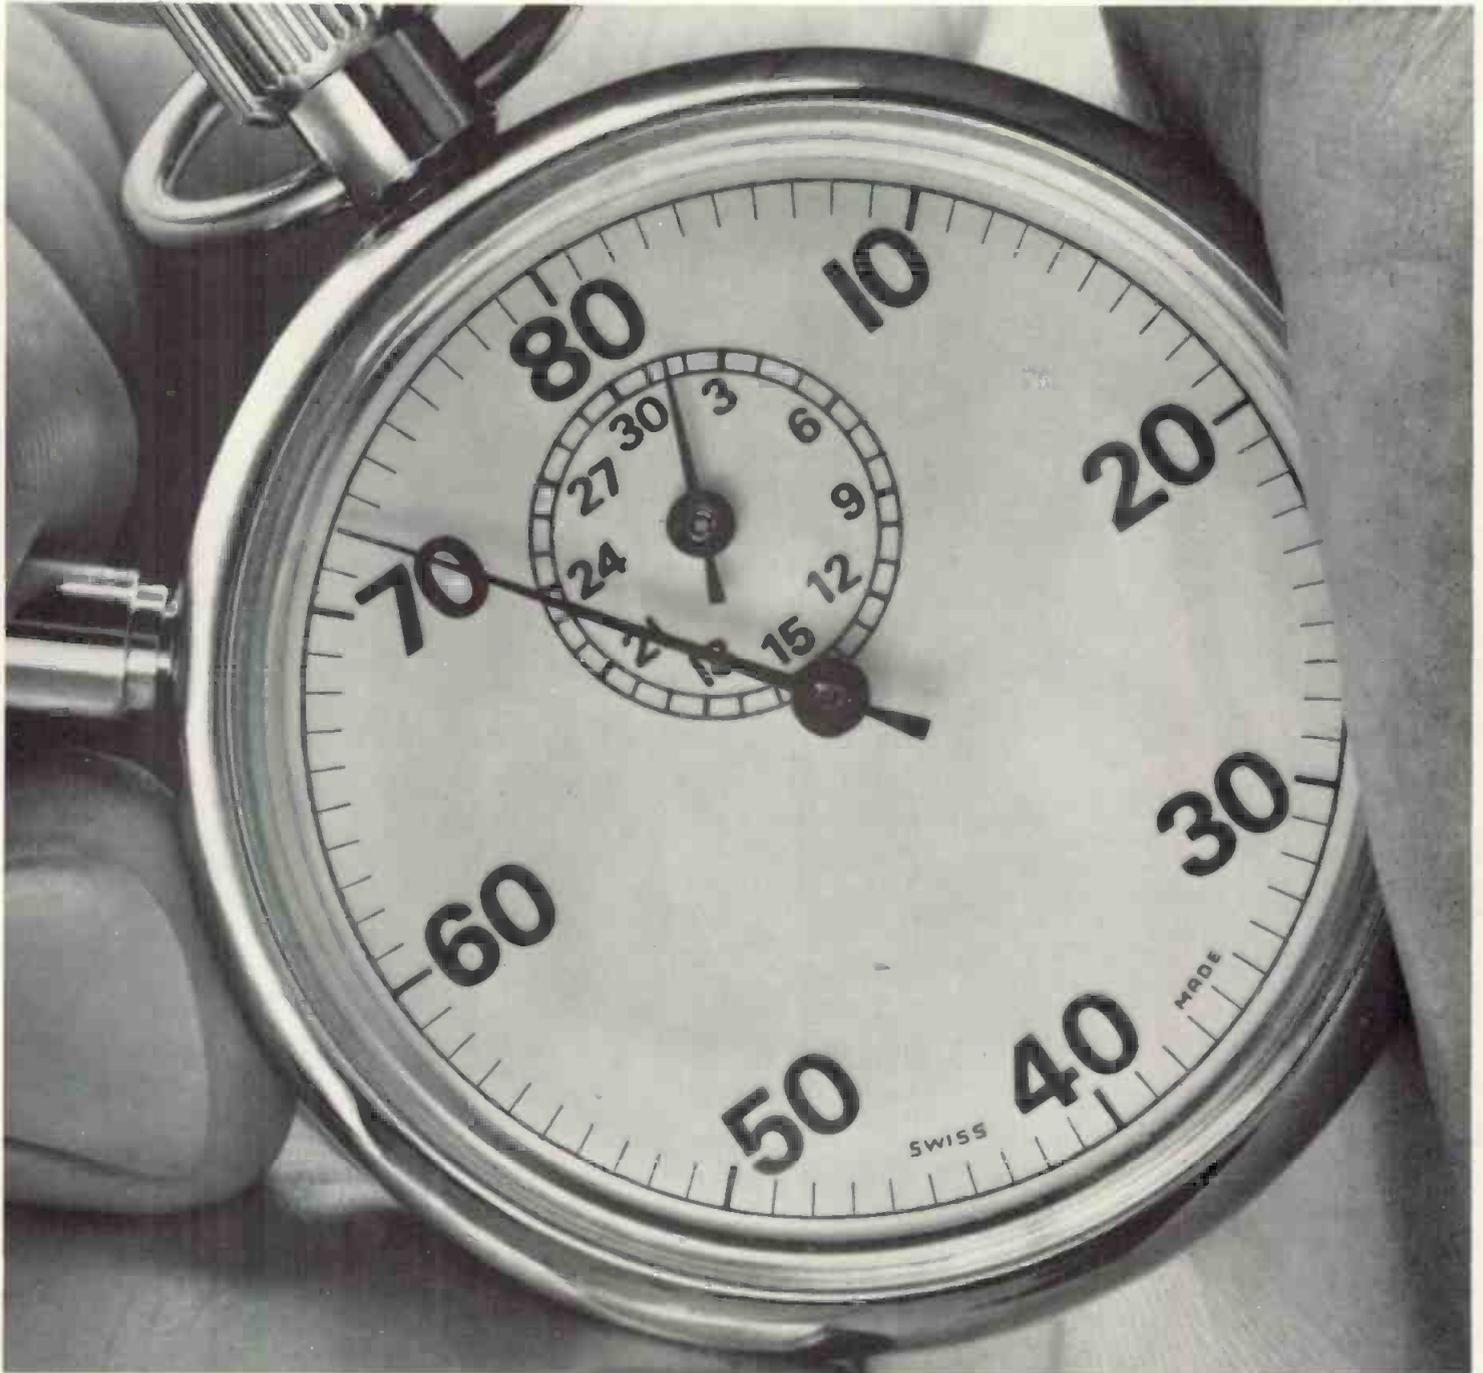

## A LITTLE MORE TIME BEFORE AIR TIME.

Now there is a faster processing method for video news film than the widely used Process VNF-1. This alternate processing can reduce, by 8 to 18 minutes, the time formerly needed to process 1000 feet of film, depending on your processor speed.

What news director wouldn't like to move the film deadline as much as 18 minutes closer to air time? Or have those extra minutes to use for edit-

ing, screening and rehearsal time?


Process RVNP uses most existing film processing equipment. The conversion is easily implemented by your personnel. To learn more, ask your Kodak Sales and Engineering Representative, or write Eastman Kodak Company, Dept. 640, Rochester, New York 14650.

©Eastman Kodak Company, 1980



Circle 209 on Reader Service Card

# MICROPROCESSORS = MACRO RESULTS

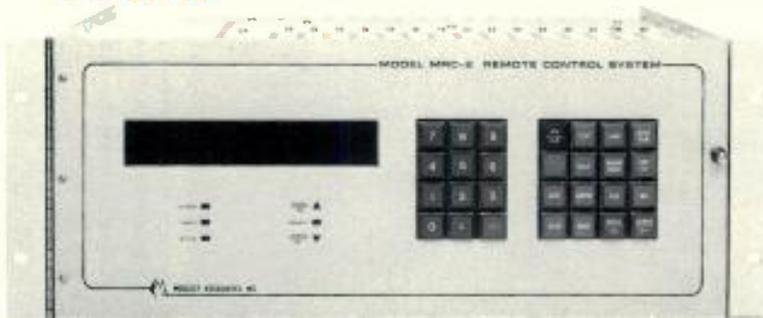


## MRC-2

- MULTI-REMOTE AND MULTI-COMMAND SITE CAPABILITY
- MULTIPLE TRANSMISSION CHANNELS
- USER DEFINED SOFTWARE
- CLEAR ENGLISH DISPLAY

expansion capabilities allow for up to six data links, up to 255 control lines, and 255 status and 255 telemetry channels. User-defined dual upper and dual lower telemetry limits alarm when exceeded. Status channels can be programmed to alarm on rising, falling, or rising and falling waveforms. The MRC-2 offers a choice of six calibration modes for telemetry inputs; all setup data is preserved in non-volatile memory. Multiple CRTs, Loggers, and Automatic Control Units for automatic transmitter operation are available at both command and remote terminals.

Leading Moseley's ever-growing family of microprocessor-based remote and supervisory control systems, the MRC-2 offers the user the most flexible and complete method of controlling and monitoring up to 99 remote sites available. With dual data link capability, 32 control lines, 32 status, and 32 telemetry channels standard;

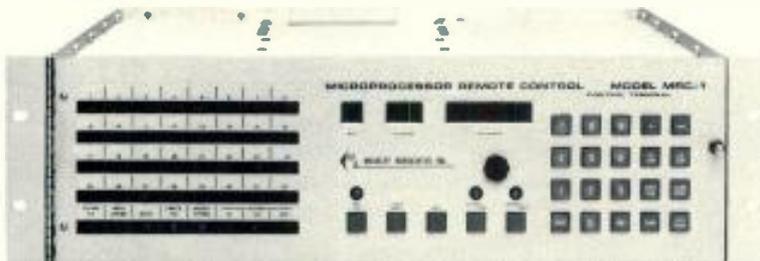

## MRC-1

- MULTIPLE REMOTE SITE CAPABILITY
- AUTOMATIC TELEMETRY MUTING
- USER DEFINED SYSTEM SETUP
- UP TO 64 COMMAND LINES PER SITE

modular design, upper and lower telemetry limits, automatic telemetry muting, and a set of 32 LEDs that display all status inputs from any site simultaneously. In case of extended shutdown, the Moseley Memory Option stores setup data for up to ten years. Optional CRT and Logging terminals simplify operator interface with the MRC-1. The Multiple Direct Command options offers ten preselected command functions to give the operator quick control of critical parameters at any site.

Closely following the MRC-2 in performance, Moseley's MRC-1 is the leading Microprocessor Control System in the industry today. Up to 64 command outputs at each of up to nine remote terminals gives the user outstanding system flexibility. System setup is tailored by the individual user. Telemetry channels may be keyboard-calibrated for linear, indirect power, or direct power scaling. The MRC-1 features

For further information please contact our Marketing Department.

## MOSELEY ASSOCIATES, INC.

A Flow General Company . Santa Barbara Research Park

111 Castilian Drive . . . Goleta, California 93117  
(805) 968-9621 . Telex: 658-448 . Cable: MOSELEY

Circle 222 on Reader Service Card

## Broadcast Equipment

transceivers. Deemphasis networks may be turned off for checking signal generators or other linearly modulated signals. A rechargeable battery pack option provides up to seven hours continuous operation. \$1095. WAVETEK INDIANA, INC.

### Digital Delay

261

Model 3050 is a low-cost digital delay that features delay or echo time selectable in 10 steps from 0.13 ms to 270 ms. Modulation width can be adjusted to a maximum ratio of 1:4, making excellent flanging/chorus ef-




fects and double tracking, according to the manufacturer. Modulation can be externally controlled by feeding a control signal into the "external" jack. The unit has separate output level controls for both "dry" signal (unaffected sound) and the effect so they can be adjusted for the optimum output blend. LEDs indicate signal present, normal, and limit. Height is 1 3/4 inches. \$450. FOSTEX CORP. OF AMERICA.

### Graphic Equalizer

262

Model 2711 supplies 12 dB of boost or cut on each of the 1/3 octave standard ISO center frequencies. The controls have center detents and oil damping. EQ in/out control, input gain control, and balanced/unbalanced input/output are also provided. NEPTUNE ELECTRONICS, INC.

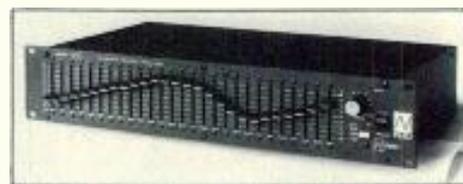

**For more information  
circle bold face numbers  
on reader service card.**

### Random Select Programmer

263

Control-3 is a new random select programmer for carousels, Instacarts, or Go-Carts. It has facilities for over 900 programmed events and provides full audio switching necessary to operate independently or to expand available

# MAGNECORD MC-II

## Modern Performance with Traditional Quality

The Magnecord MC-II is a rugged, precision tool for the broadcast control room—be it fully automated or D.J. assisted. The MC-II is made that way, by design, in the Magnecord tradition. Of course, it meets or exceeds NAB standards with IEC equalization on request.

### Superior dc Servo Drive

The dc servo, Hall effect motor with flutter-filter belt drive, provides exceptional speed stability (to 0.05%), totally unaffected by line voltage or frequency fluctuations. And it runs so cool, no ventilation is required.

### Full Broadcasting Features

Unlike some other cart machines, the Magnecord MC-II comes with the extra features broadcasters desire at no added cost. Built-in full remote control capability. Automation compatible cue tones (stop, secondary, tertiary) with LED indicators and contacts for external cue switching. Cue track input and output access for FSK logging. A universal mic/line input and front panel headphone jack to "preview" or time new carts and for servicing convenience.

### Flexible Broadcast Use

The MC-II is so flexible it virtually defies obsolescence. You can choose mono or stereo models, play only, or with record capability. Best of all, play models are field-convertible to record/play. The record electronics come in a separate housing for convenient, space-saving installations.

### Rugged Magnecord Design

As with all MagneCORDs, the MC-II is designed to work long and reliably. For example, the woven polyester drive belt and polyurethane pressure roller are virtually indestructible. The regulated dc

power supply has universal line capability (100-140V, 200-280V, 45-65Hz), consumes nominal power and is brown-out proof. Computer grade push buttons are rated at 10 million operations. A single piece chassis and machined base plate assure positive alignment of all tape transport parts. Hard core, long life heads are mounted on unique, glass-filled Lexan® head brackets with precision, phase-locked tape guides. Carefully designed circuit boards and a Mu-metal shield make the MC-II immune to RFI, even when operated directly under a transmitting tower.

### Convenient Service Access


When a Magnecord MC-II needs service, downtime is minimized. The covers and front panels are hinged for convenient access. All solid state circuitry is on plug-in

epoxy boards. Plug-in ribbon cables eliminate point-to-point wiring. And, of course, the Magnecord MC-II is made in the U.S.A. so parts are readily available.



HEAD ASSEMBLY

When you compare performance, reliability, and cost, the MC-II is indeed a modern tool worthy of the name MagneCORD, because it's made in the tradition of rugged excellence.

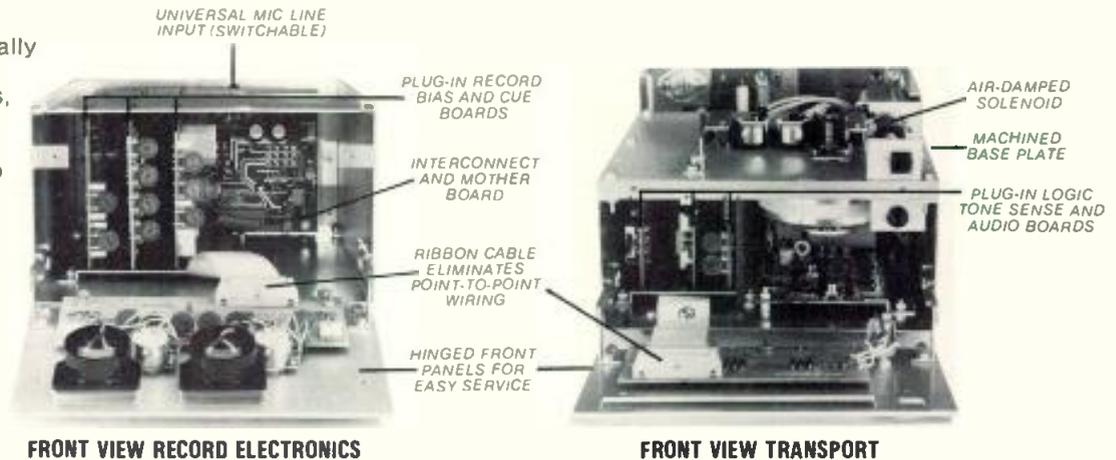

FRONT VIEW RECORD ELECTRONICS

FRONT VIEW TRANSPORT

Quality products for the audio professional



# TELEX® MAGNECORD®

TELEX COMMUNICATIONS, INC.

9600 Aldrich Ave. So., Minneapolis, MN 55420 U.S.A.  
Europe: 22, rue de la Légion-d'Honneur, 93200 St. Denis, France.

Circle 210 on Reader Service Card

**OUR FAMILY PLAN.** Now you can choose from a whole family of dbx compressor/limiters to match your budget and application. All feature our Over Easy® compression curve for inaudible transition into compression. True RMS detection for the most natural sound. Patented VCAs for precise low distortion control of audio levels. **\$210 TO \$650.\*** That's the plan. Now join the family.


See your dbx Pro dealer, or write for information.

\*Manufacturer's suggested retail price.



Over Easy® Compressor/Limiters

dbx, Incorporated, Professional Products Division,  
71 Chapel St., Newton, Mass. 02195 U.S.A.  
Tel. (617) 964-3210, Telex: 92-2522. Distributed in  
Canada by BSR (Canada) Ltd., Rexdale, Ontario.




Circle 211 on Reader Service Card

## AM BROADCASTING - HIGH FIDELITY Are these terms mutually exclusive?

YES  NO  DON'T KNOW

Surprisingly, many broadcasters may not know that the correct answer to this question is no. Large sums of money are spent each year to purchase new transmitters, new studio equipment, new audio processing equipment and to modify antenna systems for improved AM sound. Unfortunately, until now, there has been no such thing as a professional quality AM monitor receiver. As a result, the perceived fidelity of an AM signal has been severely restricted by receiver performance.

Potomac has developed the SMR-11 Synthesized Monitor Receiver which will let you hear and measure the quality of your transmitted AM signal ... perhaps for the first time. Features include: Crystal Stability; 60 dB Signal to Noise Ratio; Audio Frequency Response  $\pm 0.5$  dB, 20 Hz to 8 kHz; Total Harmonic Distortion less than 0.2% (95% Modulation) at audio frequencies above 40 Hz ... please write for complete descriptive brochure.



THIS DIAL WILL TUNE YOU IN TO THE  
NEW SOUND OF AM BROADCASTING

**POTOMAC INSTRUMENTS**

932 PHILADELPHIA AVE.  
SILVER SPRING, MD. 20910  
(301) 589-2662

Circle 212 on Reader Service Card

## Broadcast Equipment



source inputs of existing automation. Other features include four large display windows for easy memory review and battery backup for memory retention. MEI.

### Camera Dollies

264

Two new lightweight, collapsible Gitzo dollies accept all Gitzo and many other tripods for cameras up to 65 pounds. The three shoes easily fix the tripod legs to the dolly and can be moved inward



for five different positions. Two foot-pedals provide tight locking and release of each wheel. A center screw permits mounting of tripod heads and cameras for extra low positions, or of a pan-tilt cradle for ATRs, VTRs, monitors, or other equipment. Model 391 weighs eight pounds and has three-inch wheels; model 392 weighs 13 pounds and has five-inch wheels. \$299.95 and \$359.95, respectively. KARL HEITZ, INC.

### Cassette Mixer/Recorder

265

Studio 4 is a four-track cassette mixer/recorder combination that can be mounted in a standard 19-inch rack. It features six electronically balanced XLR mic input channels, switchable to line inputs, each with Studiometer three-band semi-parametric EQ, two auxiliary sends, and direct in/out effects jacks. Special design record head allows simultaneous four-track recording with Dolby noise reduction. The heavy-duty transport mechanism has a Hall effect capstan motor and dc reel motor, both direct drive. Other features include full recorder remote control capabilities and foot-switchable punch in/out facility. Chassis is all steel, with heavy aluminum control panel. STUDIOMASTER, INC.

# FOR PROFESSIONAL USE ONLY.

## THE TASCAM 122 STUDIO CASSETTE RECORDER.

**Tascam.** Now we've designed a cassette recorder for the studio. One that has everything you need to reproduce your studio sound faithfully.

Performance plus a combination of features makes the 122 a tool of the trade, not a plaything.

**Dolby Headroom Extension.** Gives you up to 10dB more headroom over 10 kHz. Cassette dubs end up hotter, fuller, cleaner when played back on any standard Dolby\* B deck.



### Three-head System.

Separate record and reproduce heads are mounted in a single housing, eliminating azimuth error.

### Front Panel Trimmers.

The kind of fine-tuning you're used to having on studio machines. Notice the parallel line inputs in place of hi fi microphone inputs.

**Plus Options.** Like full transport remote control and dbx.\* Check out the 122's qualifications at your Tascam dealer. When you want the best you can get, it pays to use a professional.

### Two-speed Transport.

You get 1 $\frac{7}{8}$  ips plus 3 $\frac{3}{4}$  ips, a two-position pinch roller for cueing in the pause mode and a capstan motor that doesn't idle needlessly in the stop mode, for long-term reliability.

**TASCAM** STUDIO SERIES  
TEAC Production Products

© 1981 TEAC Corporation of America, 7733 Telegraph Road, Montebello, CA 90640  
\*Dolby and dbx are registered trademarks.

Circle 220 on Reader Service Card

www.americanradiohistory.com

## Broadcast Equipment

### Modular Mixer/Amplifiers 273

A new series of modular mixer/amplifiers includes models MA 35, MA 65, and MA 125 (35 W, 65 W, and 125 W, respectively). All models are



available in transformer output or direct output versions, with 220 V operation available as a no-cost option. The series has been designed for portable or rack-mounted applications, with no rack-mounting kit required. A twin accessory in/out jack is standard and S/N has been significantly improved over previous models. Each unit has six input gain controls; all operate satisfactorily down to 85 V. EDCOR.

**For more information  
circle bold face numbers  
on reader service card.**

### Production Switcher 274


The Model 210 video production switcher, compact enough for small EFP trucks, is capable of the same types of effects as the maker's larger switchers. Standard features include 10 inputs, including color black and color background; four input buses; 32 effect patterns; three types of pattern modulation with freeze; mix, wipe, key, mix-



key, wipe-key, and fade through auto black effects; midstream keyer with edging and key mask using effects patterns; flip-flop mixer with take bar; control provisions for downstream character generator; master fade-to-black with pulse processing; non-sync inhibit system; and rack-mount 19-inch by 12¼-inch control panel. ISI.

### Transmission Test System 275

The AWA S1100 audio transmission test system, manufactured by Amalgamated Wireless (Australasia) Ltd., automatically measures 46 significant parameters of mono and stereo transmis-

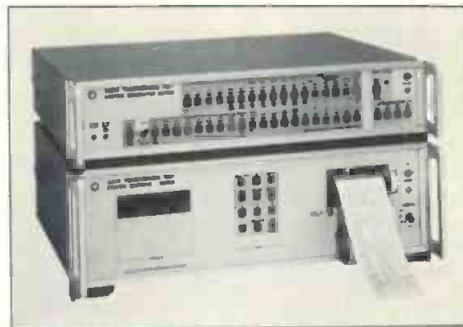

sion chains and equipment in 3.5 seconds. With the system, performance measurements may be carried out virtually without interruption to program in both radio and TV sound channels. It incorporates a single test mode for production testing, alignment, and servicing. For more complex requirements, the generator and receiver units may be controlled through an RS-232C interface or through the generator's IEEE-488 bus interface. A printout provides a means of logging performance for maintenance and recording purposes. Typical system, \$13,200. MARCONI INSTRUMENTS.

# bvs

### DELAY LINES

Video•Pulse  
Active•Passive•PC•DIP•  
Boxed•Switchable•Variable  
Rack mount cards.

### LOW PASS FILTERS

Eliminate buzz caused by  
spurious out-of-band spikes  
from character generators.

### NOISE MEASUREMENT FILTERS

An easy, economical method  
of video noise measurement.

**broadcast video systems ltd.**

1050 McNicoll Avenue  
Agincourt, Ont. M1W 2L8  
(416) 497-1020

Circle 114 on Reader Service Card

## CASES BUILT FOR THE FUTURE (OF YOUR EQUIPMENT)

# Star Case



When you pack for the ultimate  
show whether it be across town or  
across the universe your equipment  
will land safely with Star Case.

Before your next close encounter  
on the road call or write:

Star Case  
Manufacturing Company, Inc.  
15525 South 70th Court  
Orland Park, Illinois 60462  
312-429-6200

Circle 215 on Reader Service Card

# BM/E's ENG/EFP/EPP HANDBOOK

THE MOST AUTHORITATIVE, COMPREHENSIVE GUIDE TO THE TECHNOLOGY AND TECHNIQUES OF THE 80'S.

**THE DEFINITIVE SOURCE** for video equipment evaluation selection and acquisition. Published by BM/E — Broadcast Management/Engineering, this guidebook is designed to be the authoritative text on the entire subject of electronic journalism, field production and post-production in the 80's. A primer for newcomers, and advanced report for professionals, the Handbook is organized to allow you to select the proper equipment for any operation — from the simplest to the most complex — and plan for expansion as your production requirements grow.

**FACTUAL.** In 570 fact-filled pages, liberally illustrated with photos, diagrams and charts, the Handbook offers detailed analysis of existing equipment and systems, probing strengths and shortcomings of current product design and covering key parameters for product comparison. It offers guidance in long range organization and systems planning, as well as predictions about emerging technology and trends. Authored by C. Robert Paulson, this video production handbook is written in an informal style that satisfies the needs of both the technical and non-technical reader.

**ESSENTIAL.** With constant changes in technology and the proliferation of products, there are no "simple" purchasing decisions in the ENG/EFP/EPP market. With each buying decision impacting on plans for the future, you need all the help and advice you can get. Now. Whether you're technical or non-technical, operations or management, this book is your required reference for coping with the "digital decade," for assuring productivity and profitability in your operations, now and in the future.



EFP/EPP market. With each buying decision impacting on plans for the future, you need all the help and advice you can get. Now. Whether you're technical or non-technical, operations or management, this book is your required reference for coping with the "digital decade," for assuring productivity and profitability in your operations, now and in the future.

## CONTENTS

### Part I — Overview

- Chapter 1. What's Happening in TV Communication
- Chapter 2. Communication System Organization
- Chapter 3. Trends in Communication Systems

### Part II — Electronic Field Production

- Chapter 4. Cameras, Lenses and Lighting
- Chapter 5. Video and Audio Recorders
- Chapter 6. Field System Accessories
- Chapter 7. Planning & Acquiring ENG/EFP Systems

### Part III — Electronic Post-Production

- Chapter 8. Editing Systems and Controllers
- Chapter 9. Video Signal Processing — Switchers
- Chapter 10. Video Signal Processing — TBC's/Quantels
- Chapter 11. Audio Signal Processing — Studio Audio/PCM/etc.
- Chapter 12. EPP System Accessories
- Chapter 13. Planning & Acquiring EPP Products

### Appendices

- A. Public Policy & Technological Developments
- B. TV Standards
- C. Bibliography & Reference Section

## ORDER NOW. LIMITED EDITION.

PLEASE SEND \_\_\_\_\_ COPIES OF BM/E's ENG/EFP/EPP HANDBOOK @ 39.95 EACH.  
IF CHECK ACCOMPANIES ORDER, PUBLISHER PAYS POSTAGE AND HANDLING.

CHECK ENCLOSED \$ \_\_\_\_\_ NAME \_\_\_\_\_  
 CHARGE TO MY — BANKAMERICARD  
VISA — MASTERCARD TITLE \_\_\_\_\_  
# \_\_\_\_\_ COMPANY \_\_\_\_\_  
EXP. DATE \_\_\_\_\_ CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

Make check payable to Broadcast Management/Engineering

NY State Residents add 8% sales tax

**BM/E — 295 Madison Avenue, New York, N.Y. 10017**

## Advertisers Index

ADM Technology, Inc	11
Alexander Manufacturing Co	106
American Data Corp	30
American Video Products	122
Ampex Corp. AVSD	4-5
Anton/Bauer, Inc	13
Aristocart	18
Asaca Corp. of America	107
Audiomarketing Ltd	122
Belar Electronics Lab., Inc	146
Beston Electronics	131
Broadcast Electronics, Inc	29
Broadcast Video Systems	144
California Microwave	70
Camera Mart, Inc	32
Canon USA, Inc	62
Capitol Magnetic Products	94
Central Dynamics Corp	19, 115
Cetec Vega	105
Christie Electric Corp	130
Cine 60, Inc	110
CMX/Orox	3
Coast-Com	84
Compact Video Sales	75
Comsearch	108
Conrac Corp	47
Continental Electronics Mfg. Co	128
Convergence	90
Countryman Associates	28
Crosspoint Latch Corp	51
Datametrics, Inc	49
Datatron, Inc	89
dbx, Inc	14, 142
Delta Electronics	129
Digital Video Systems	55
Elcom-Bauer	34-35
Electrohome Ltd	126
Electro-Voice	77, 114

Emcee Broadcast Products	117
Everything Audio	133
Fernseh, Inc	41
Fidelipac	125
Fuji Photo Film USA, Inc	121
Alan Gordon Enterprises, Inc	138
Grass Valley Group, Inc	7, 116
Graham-Patten Systems	78
Harris Audio Systems	22, 113
Hitachi Denshi American Ltd	17
Ikegami Electronics USA, Inc	57, 79, 85, 112
Industrial Sciences, Inc	43
US JVC Corp	67
Knox Video Systems	27
Eastman Kodak	139
James B. Lansing Sound, Inc	137
Leader	48
Lenco, Inc	52
Lerro Electrical Corp	109
LPB, Inc	103
LTM Corp	130
3M/Magnetic Tape Div	96
3M/Mincom-Video Products	60-61
Marconi Electronics	102
Matrix Systems	12
Maxell Corp. of America	111
MCI/Quantel (Micro Consultants Inc)	104, 138
Microtime, Inc	15
Moseley Assoc, Inc	140
MPCS	16
NEC America, Inc	123
Rupert Neve, Inc	86
N-Pro	135
OKI Electric	83
Orban Associates, Inc	92-93

Panasonic Matsushita	Cover 2
Peirce-Phelps	95
Penny & Giles	120
Phillips Test & Measuring Instruments	80
Palomar College	133
Potomac Instruments	142
Quantum Audio Labs	128
Ramko Research	21, 23
RCA Broadcast Systems	8-9
RCA/EO	101
RTS Systems	73
Russco Electronics, Inc	50
Scientific-Atlanta	20
Schneider TV Lenses	33
Sennheiser Electronic	124
Shure Bros., Inc	26, 136
Sony Broadcast	24-25
Spectra Sonics	97
Stanton Magnetics, Inc	58
Star Case	144
Studer Revox America, Inc	Cover 3
Technics Recording & Broadcast	44
Tektronix, Inc	124
Telex Communications, Inc	141
Texas Electronics, Inc	58
Thomson-CSF Broadcast	59, 68-69
Ultra Audio Products	146
Video Aids Corp of Colorado	118
Videomedia, Inc	131
Videotek, Inc	38
Vital Industries, Inc	65
Ward Beck Systems Ltd	Cover 4
Winsted Corp	78
Wold Communications	134
Yamaha	98

### INDESTRUCTIBLE AUDIO MIXER WITH UNLIMITED BATTERY LIFE ... WELL, ALMOST ...

Everything is recessed within a rugged U-channel. You can drive a truck over it. In intermittent use, 100 hrs. battery life! 4 mic. mixers, line input, 1kHz. tone, battery-test. True vu meter, 600 ohm transformer output @ 8vu, 90db gain, flat 20-20kHz., transformer inputs. Headset jack also feeds unbal. load. Weighs scant 3 1/4 lb.; less than 12" long; beltloop. Accepts external 12v.d.c. too. Includes standard XL mic. connectors.



AMA41



Div., Audio  
Intl., Inc.

**Ultra Audio Products**  
P.O. BOX 921 • BEVERLY HILLS  
CA 90213 • 213/276-2726

Circle 216 on Reader Service Card

### When accuracy Counts... Count on Belar for AM/FM/TV MONITORS



**BELAR**  
AM MODULATION MONITOR

**BELAR** CALL ARNO MEYER (215) 687-5550  
**ELECTRONICS LABORATORY, INC.**  
LANCASTER AVENUE AT DDRSET, DEVON, PA. 19333 • BDX 826 • (215) 687-5550

Circle 217 on Reader Service Card

### SALES OFFICES

# BM/E

Broadcast Management/Engineering

295 Madison Ave.  
New York, New York 10017  
Telex: 64-4001

#### Eastern & Midwestern States

295 Madison Avenue  
New York, New York 10017  
212-685-5320  
James C. Maywalt  
Denis J. O'Malley

#### Western States

300 Broadway  
Suite 20  
San Francisco, CA 94133  
415-421-7330  
William J. Healey  
18008 Skypark Circle, Suite 260  
Irvine, CA 92714  
714-556-6480  
Bob Hubbard

#### United Kingdom/Europe

Chilberton House  
Doods Road  
Reigate, Surrey, England  
Telephone: Reigate 43521  
Bronwyn Holmes  
Derek Hopkins

#### Japan/Far East

Eiraku Building  
1-13-9, Ginza,  
Chuo-Ku, Tokyo 104 Japan  
03 (562) 4781  
S. Yasui  
K. Yamamoto

# Portrait of a Quiet Family

Meet the members of our Studer console family. The compact, very portable 169. The expanded 269. And the full size 369 studio production console. A respected family with three common traits...

**Exceptional Audio Quality**  
Studer consoles are designed for quiet operation, the utmost signal clarity, and precise tailoring of the sound. The inputs feature 3 section EQ, the overload margins are generous throughout, and each master module has a built-in limiter. As for S/N, well, it's no surprise that the 169 has been used for many digital classical recordings.

**Total Flexibility**  
Pick a frame size and outfit it to suit your needs: portable

remote, OB van, or studio production. Module selections include basic input (mic/line), stereo high level, master, monitor, reverb/foldback, and



aux monitor. Optional linking kits provide extra I/O flexibility. On the 169/269, power supply options allow operation from mains cable, vehicle battery, or built-in NiCad batteries. All three consoles are available with either VU meters or, at no extra charge, one of two PPM types.

**Long-Term Reliability**  
Studer consoles are built for the long run. They'll take years of hard knocks in remote or OB van use. The Studer "family tradition" of reliability is the result of thoughtful engineering and careful Swiss craftsmanship.

Introduce yourself to the Studer family of consoles. They're quietly setting the standards.



**STUDER REVOX**

STUDER REVOX AMERICA, INC.

1425 Elm Hill Pike • Nashville, TN 37210 • (615) 254-5651

Offices: Los Angeles (213) 780-4234/New York (212) 255-4462 • Canada: Studer Revox Canada, Ltd.

Circle 218 on Reader Service Card

# The Future starts now!

It's being developed in special classrooms like those at Conestoga College of Applied Arts and Technology.

Recognizing that practical training based on high technology equipment is essential in tomorrow's world, Conestoga has spared no efforts to provide the most progressive systems and environment possible for students and faculty today.

To underscore this dedication to perfection, the Radio & Television Department has chosen a Ward-Beck L2042 audio console for the main TV production studio.

Having mastered a broad range of professional skills, as a result of this advanced training, Conestoga's graduates step confidently into their chosen careers in broadcasting and the performing arts.



First by Design.

WBS L2042  
Main Studio, Conestoga College



Ward-Beck Systems Ltd., 841 Progress Avenue, Scarborough, Ontario, Canada M1H 2X4.  
Tel:(416)438-6550.

Ward-Beck Systems Inc., 6900 East Camelback Road, Suite 1010, Scottsdale, Arizona 85251.